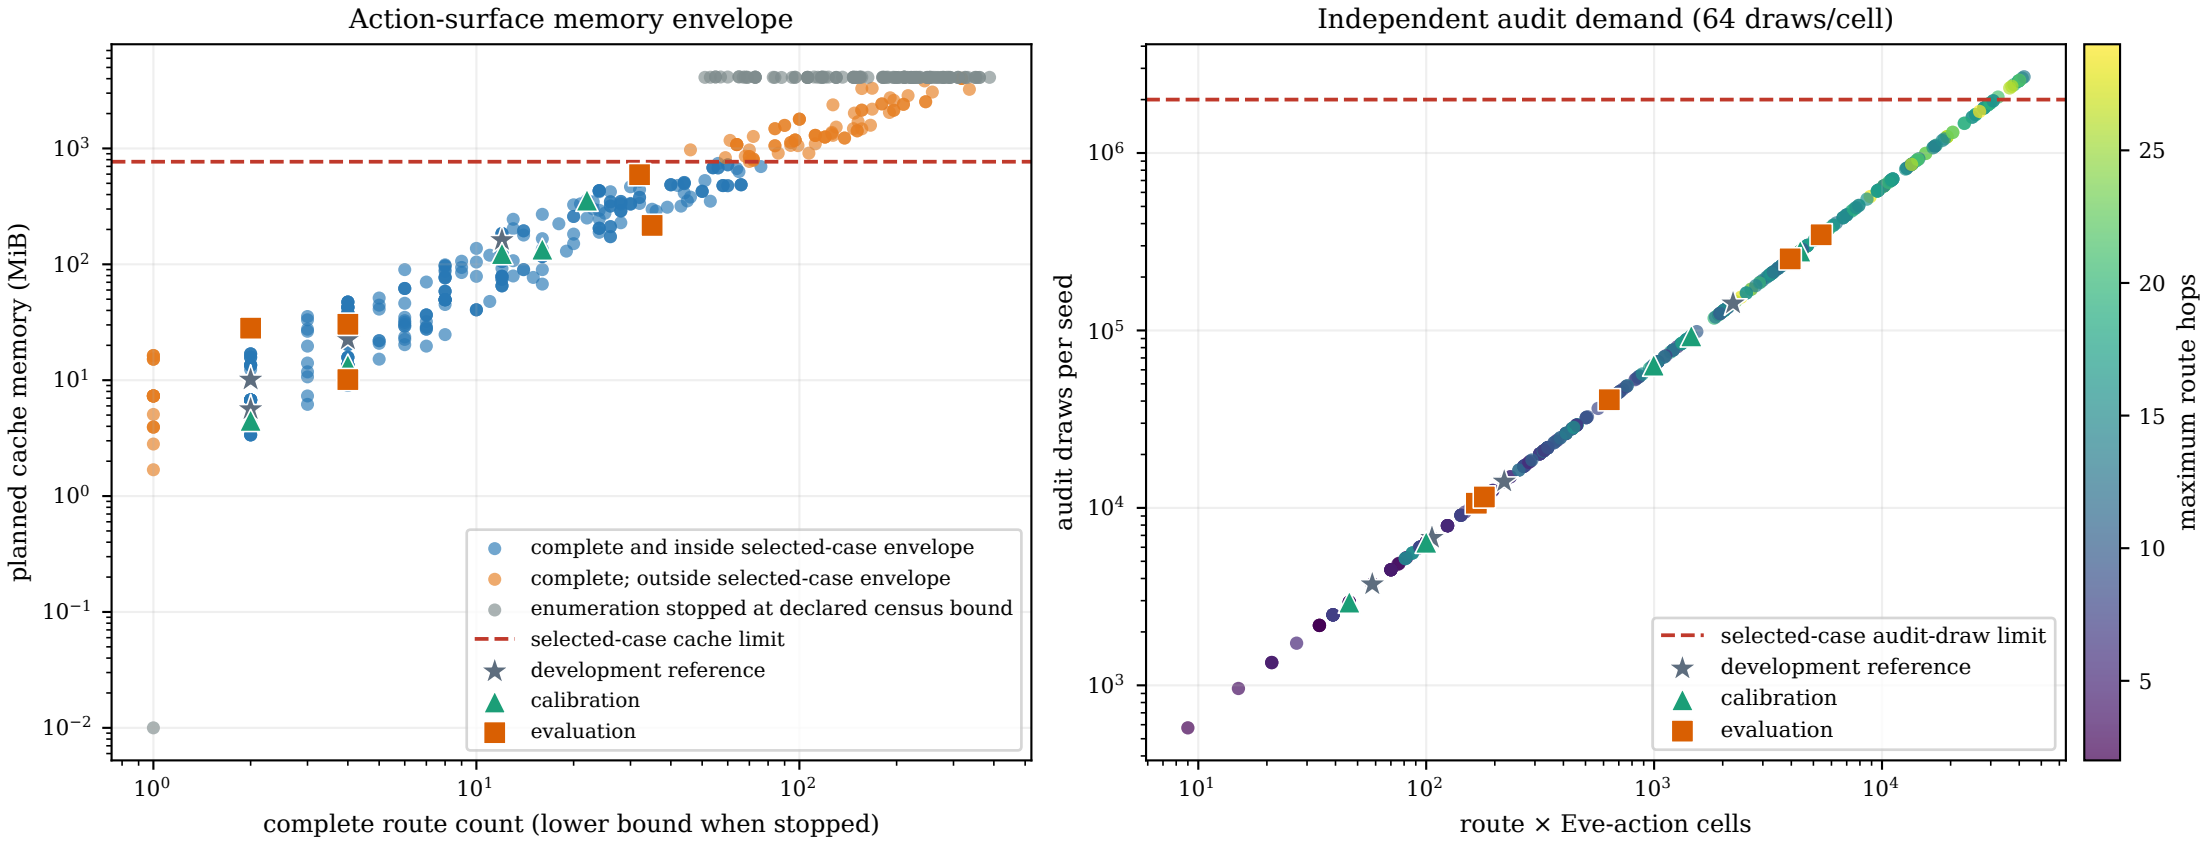
Action-surface memory envelope
planned cache memory (MiB)
complete route count (lower bound when stopped)
complete and inside selected-case envelope
complete; outside selected-case envelope
enumeration stopped at declared census bound
selected-case cache limit
development reference
calibration
evaluation
Independent audit demand (64 draws/cell)
audit draws per seed
route × Eve-action cells
selected-case audit-draw limit
development reference
calibration
evaluation
maximum route hops