




FILE NO: JE362810


SPECIFICATIONS

Rated Current:3.0AMP  
Contact Resistance:20mΩ Max  
Withstand Voltage:1000V AC/DC  
Insulation Resistance:1000MΩ Min  
Operation Temperature:-40°c to +105°c

Contact Material:Brass  
Contact Plating:Au Or Tin Over Ni  
Insulator Material:Polyester(UL94V-0)  
Standard: PBT  
Max.Processing Temp: 180°C for 30-60 seconds  
(200°C for 10 seconds)

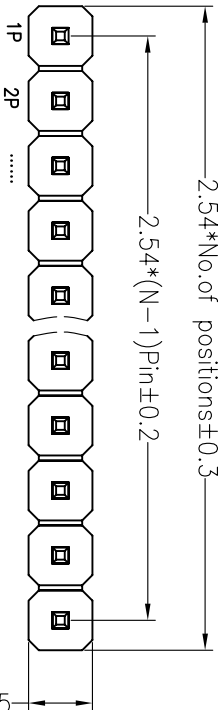

Recommended P.C.B Layout(Top Side)  
(PCB BOARD TOLERANCE±0.05)

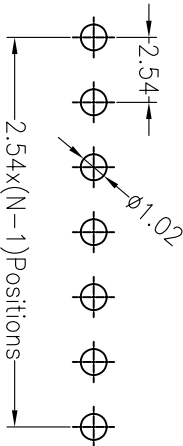

Ordering Information


1225 11 XX X N XX S XXX X 01

No. of Pins Per Row  
1x40  
2x40  
3x40  
1--40  
2--80  
3--120

Insulator Material Option  
A=BK-PBT  
B=BK-PA66  
C=BK-PA6T  
D=BK-PA46  
E=BK-PA9T  
F=BK-LCP

Contact Plating  
G0:0.8U" Gold  
G1:1U" Gold  
G2:1.5U" Gold  
G3:2U" Gold  
G4:3U" Gold  
G5:5U" Gold  
S0:Gold Flash/Tin  
SN:Tin

Pin Length  
Packing  
0=PE Bag  
A=Troy  
T=Tube  
P=Tube+Cap  
R=Reel+Cap  
M=Reel+Mylar

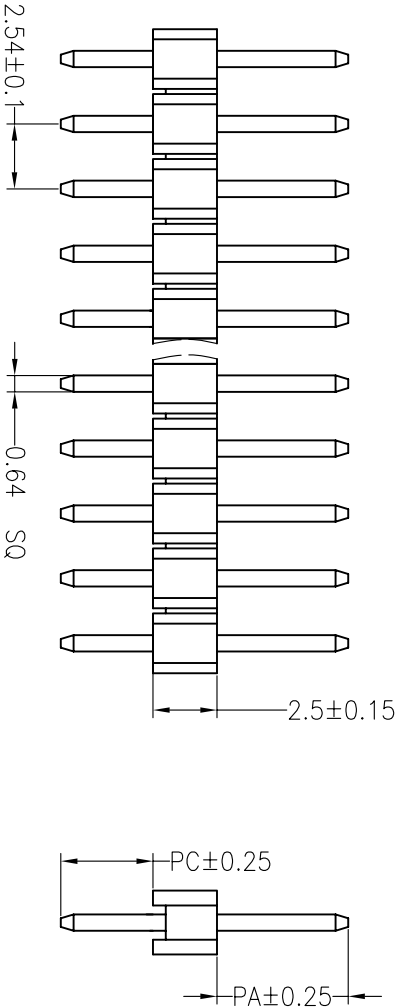

Dimension antitheses list			
ITEM	PA	PC	L
Standard	6.00	3.00	11.50
Alternate			

**JIN** 深圳市锦凌电子有限公司  
SHENZHEN JINLING ELECTRONIC CO.,LTD  
Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

OPERATION		DRAW		SCALE		FIT	
X.X	±0.30	YYSSheng	12.03.28	UNIT	mm	SIZE	A4
X.XX	±0.20	CHECK		SHEET	1/1	PART NO.	122511XXNXSXXX01
X.XXX	±0.10			PROJ.	◆	TITLE:	2.54mm Pin Header 2.5mm Single 180°
Angle	±3°	APPROVE					
DIM	TOL						

1 2 3 4 5 6 7 8 9