

Preliminary Design Description (PDD)

Terma case

Document Identification: F-PDD-2014-V1

Company F:

IVAN GRUJIC, 10454

LARS NIELSEN, 10765

LARS JUHL LUNDE, 10423

SERGIU-VLAD TALNACI, 201400122

LASSE BRØSTED PEDERSEN, 10769

FATEMEH SADAT KIAEERAD, 201210732

This document is confidential between company F and the parties involved in the SPS project. For other parties, it is prohibited to continue reading beyond this point.

February 18, 2014

Contents

1	Revision history	1
2	Stakeholders	1
3	Subcontracter Information	1
4	Scope	2
4.1	Identification	2
4.2	System-overview	2
4.3	Document overview	2
5	System-wide design decisions	2
6	System architectural design	3
6.1	System components	3
6.2	Concept of execution	3
6.3	Interface design	3
6.3.1	External interfaces	3
6.3.2	Internal interfaces	4
7	Requirements traceability	4

1 Revision history

Date	Ver. No	Author	Contact	Description
17-Feb-2014	1.0	-	-	Initial version

2 Stakeholders

Name	Role	Contact
Stefan Hallerstede	Customer	sha@iha.dk
Company G	Subcontractor	201302499@iha.dk
Company F, Training department	Trainers	201210732@post.au.dk

3 Subcontracter Information

A subcontracter will be used to develop and manufacture the pod and any additional climate control protection as described in Requirement 29 and 41. The subcontracter will be Group G.

4 Scope

4.1 Identification

4.2 System-overview

The goal of the system is to protect the aircraft from enemy incoming missiles by deploying flares and chaffs. It also provides threat information to the information computer, which interacts with the pilot. It is possible for a technician to load the system with chaffs and flares. During the preparation phase before the missions, the system informs the technicians about the current amount of chaffs and flares present on the aircraft.

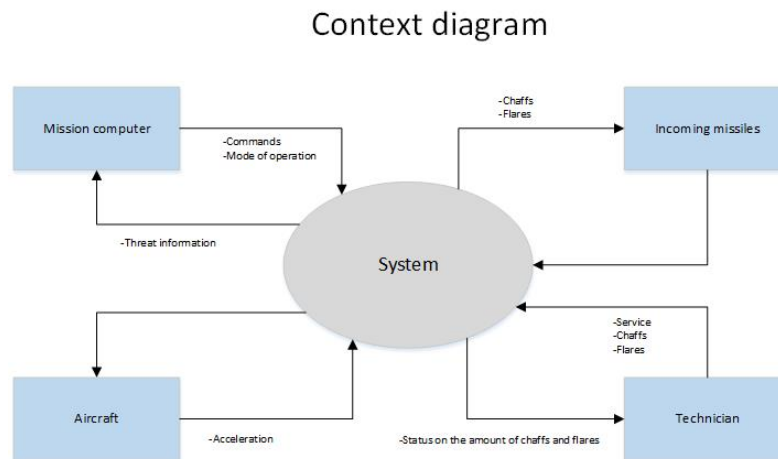


Figure 1: Context diagram

4.3 Document overview

5 System-wide design decisions

System-wide design decisions for the system were made as part of the preliminary design effort. The team evaluated potential system-wide design issues and conducted analysis on how the system and its components would behave under different environmental conditions. TODooo . Write more stuff here

States of the system The system will have different states depending on what is set by the mission computer. The system has three distinct states:

- Automatic: The system automatically detects and deploys the payload without the pilot's interaction
- Semi-automatic: The system detects the enemy missile but it asks for the pilot's consent before deploying the payload
- Manual: The pilot has to select the desired payload and deploy it himself. Relevant constraints: The system has a built-in safety feature which will prevent deployment of the payload when the plane is not airborne. Detection and action upon incoming threats We are using the missile warning system (MWS) to detect incoming missiles. Incoming missiles are considered an input in this design where the payload

deployment system will respond to this input by deploying the payload if the missile is close enough to the aircraft. The payload is located in the pod that is mounted on the aircraft.

Components:

- Pod The physical dimensions of the pod cannot exceed 0.5X0.5X5 meter. The pod will have the same color as the rest of the aircraft in order to blend in with the environment. The pod will have a correct aerodynamic shape in such a way that it will create as little drag as possible so it will have minimum effect on the aircrafts speed.
- Cockpit unit To prevent dispensing the payloads on the ground we will request sensor input from the mission computer that will make the system aware if the plane is in flight.
- MWS
- Dispenser
- Magazines

After listing all the data. We justify that we use a cockpit unit that works with all of the data and acting on inputs from the missile warning system.

6 System architectural design

6.1 System components

6.2 Concept of execution

Figure. 2 provides an overview of the signals and protocols used in the system. The aircraft communicates with the cockpit unit using MIL-STD-1553-B. The same standard is used between the cockpit unit and the missile warning system (MWS).

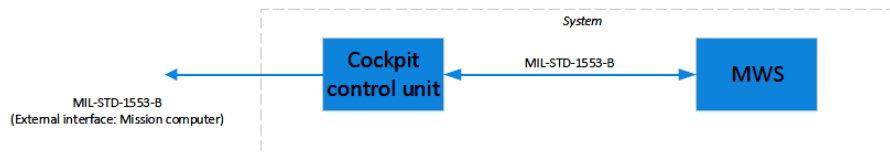


Figure 2: System signal overview

Figure. 3 provides an overview of the components comprising the system. The system has two major parts; the cockpit unit and the pod. The pod contains the MWS and components for handling and dispensing the payload.

6.3 Interface design

6.3.1 External interfaces

- Interface identification and diagrams.
blaa
- Project-unique identifier of interface
blaa

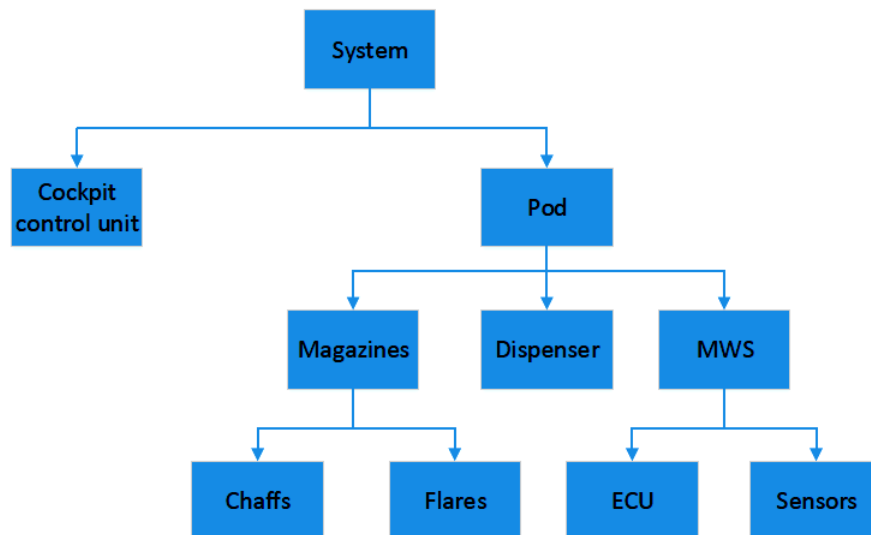


Figure 3: Hierarchical overview of system

6.3.2 Internal interfaces

- Interface identification and diagrams.
blaa
- Project-unique identifier of interface
blaa

7 Requirements traceability

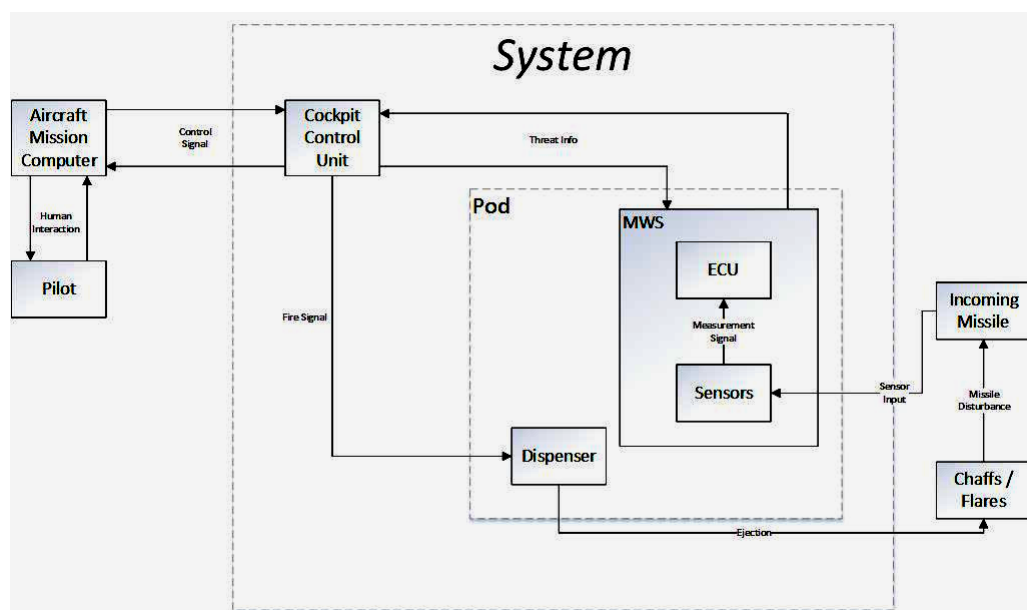


Figure 4: Signal Flow Diagram