

Two of the shipped methods, mutually exclusive on a pad

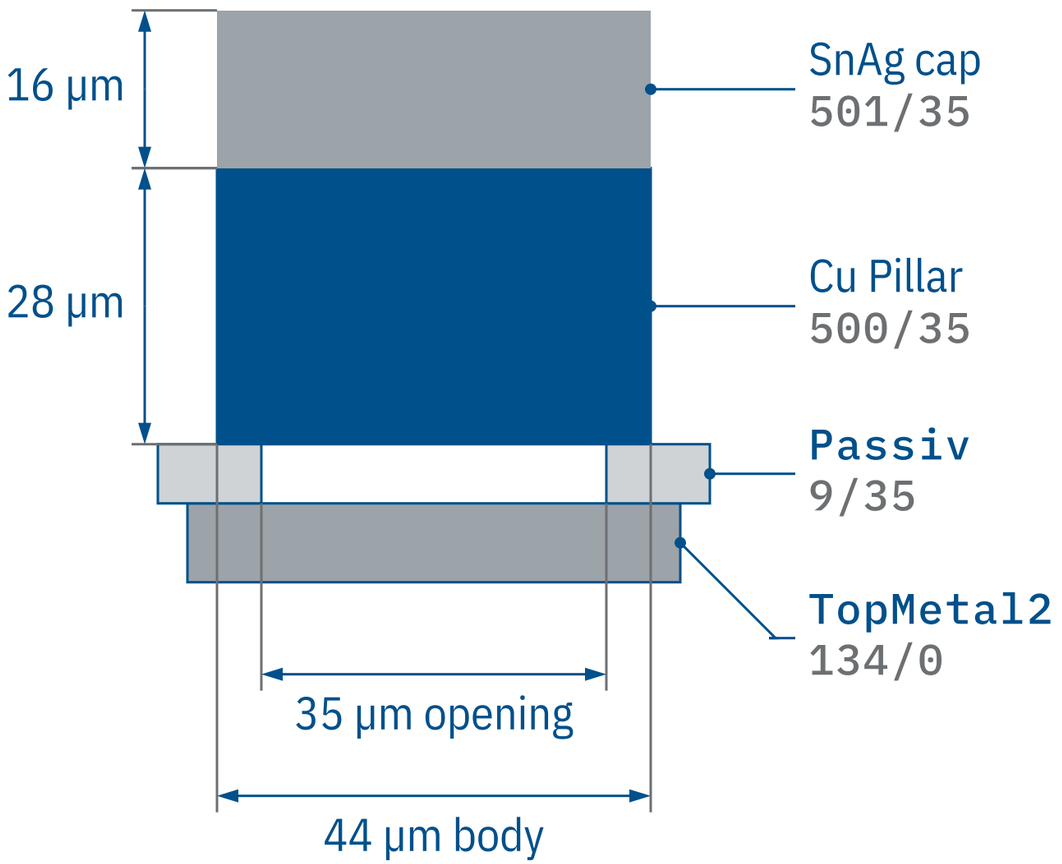

cupillar_opt1 (Table 6.1 Option 1)
adapter **ihp_cupillar**
TopMetal2 enclosure 7.5 µm

EITHER / OR

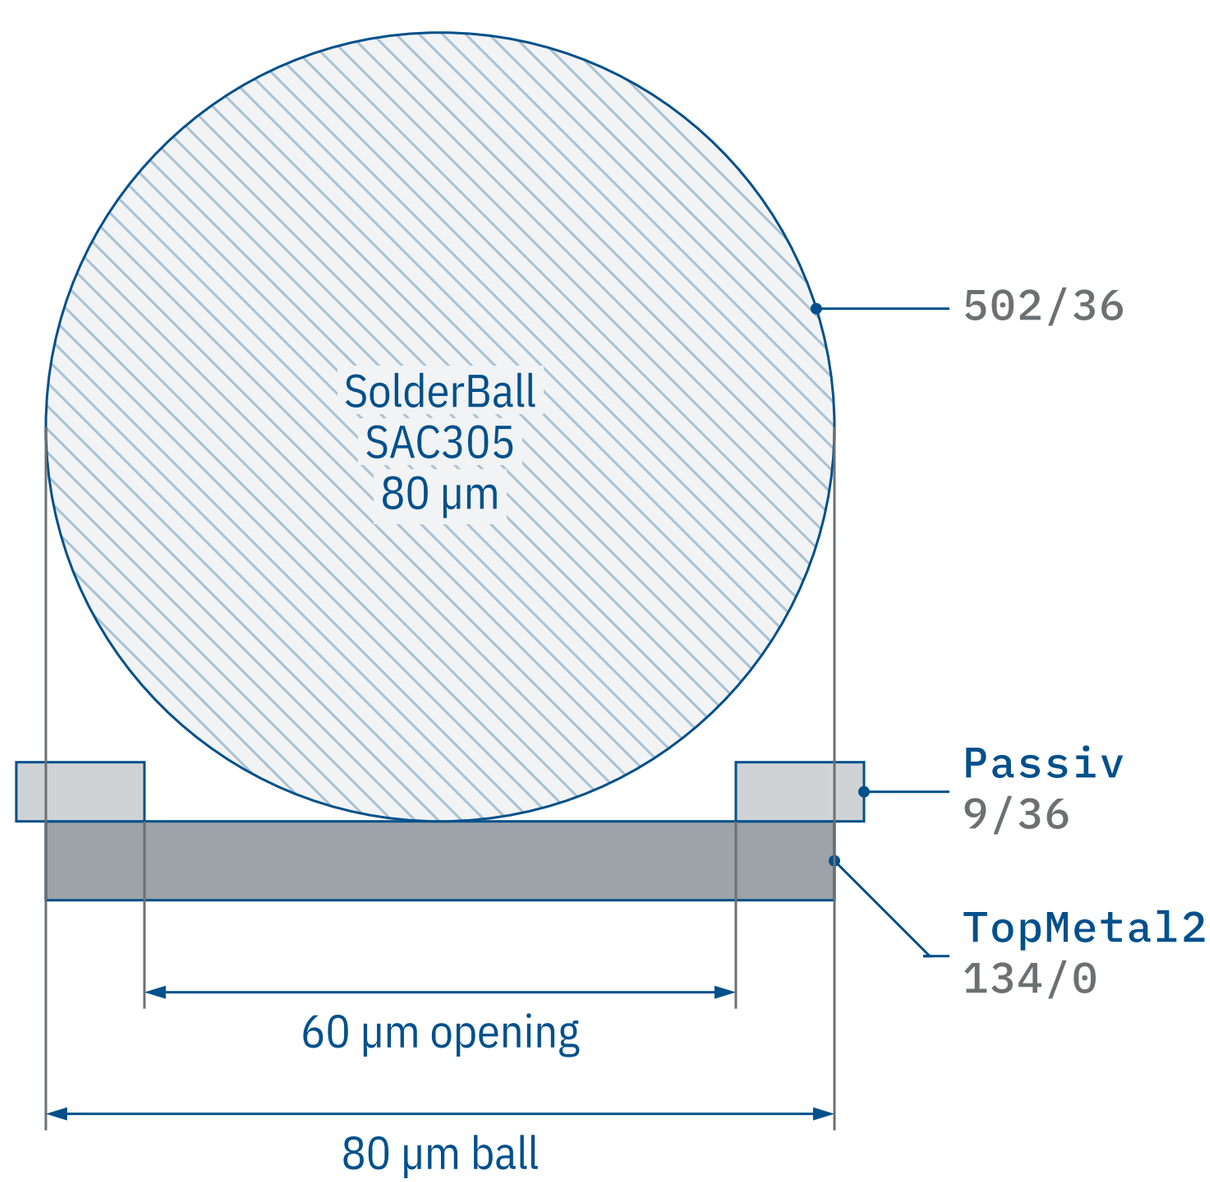

sbump_sac305
adapter **ihp_sbump**
TopMetal2 enclosure 10.0 µm

The 500-range bodies are 3D aux layers, non-fabrication (EM/thermal simulation).
Datatype 35 is the pillar opening, datatype 36 the solder-bump opening.