
Two of the shipped methods, mutually exclusive on a pad

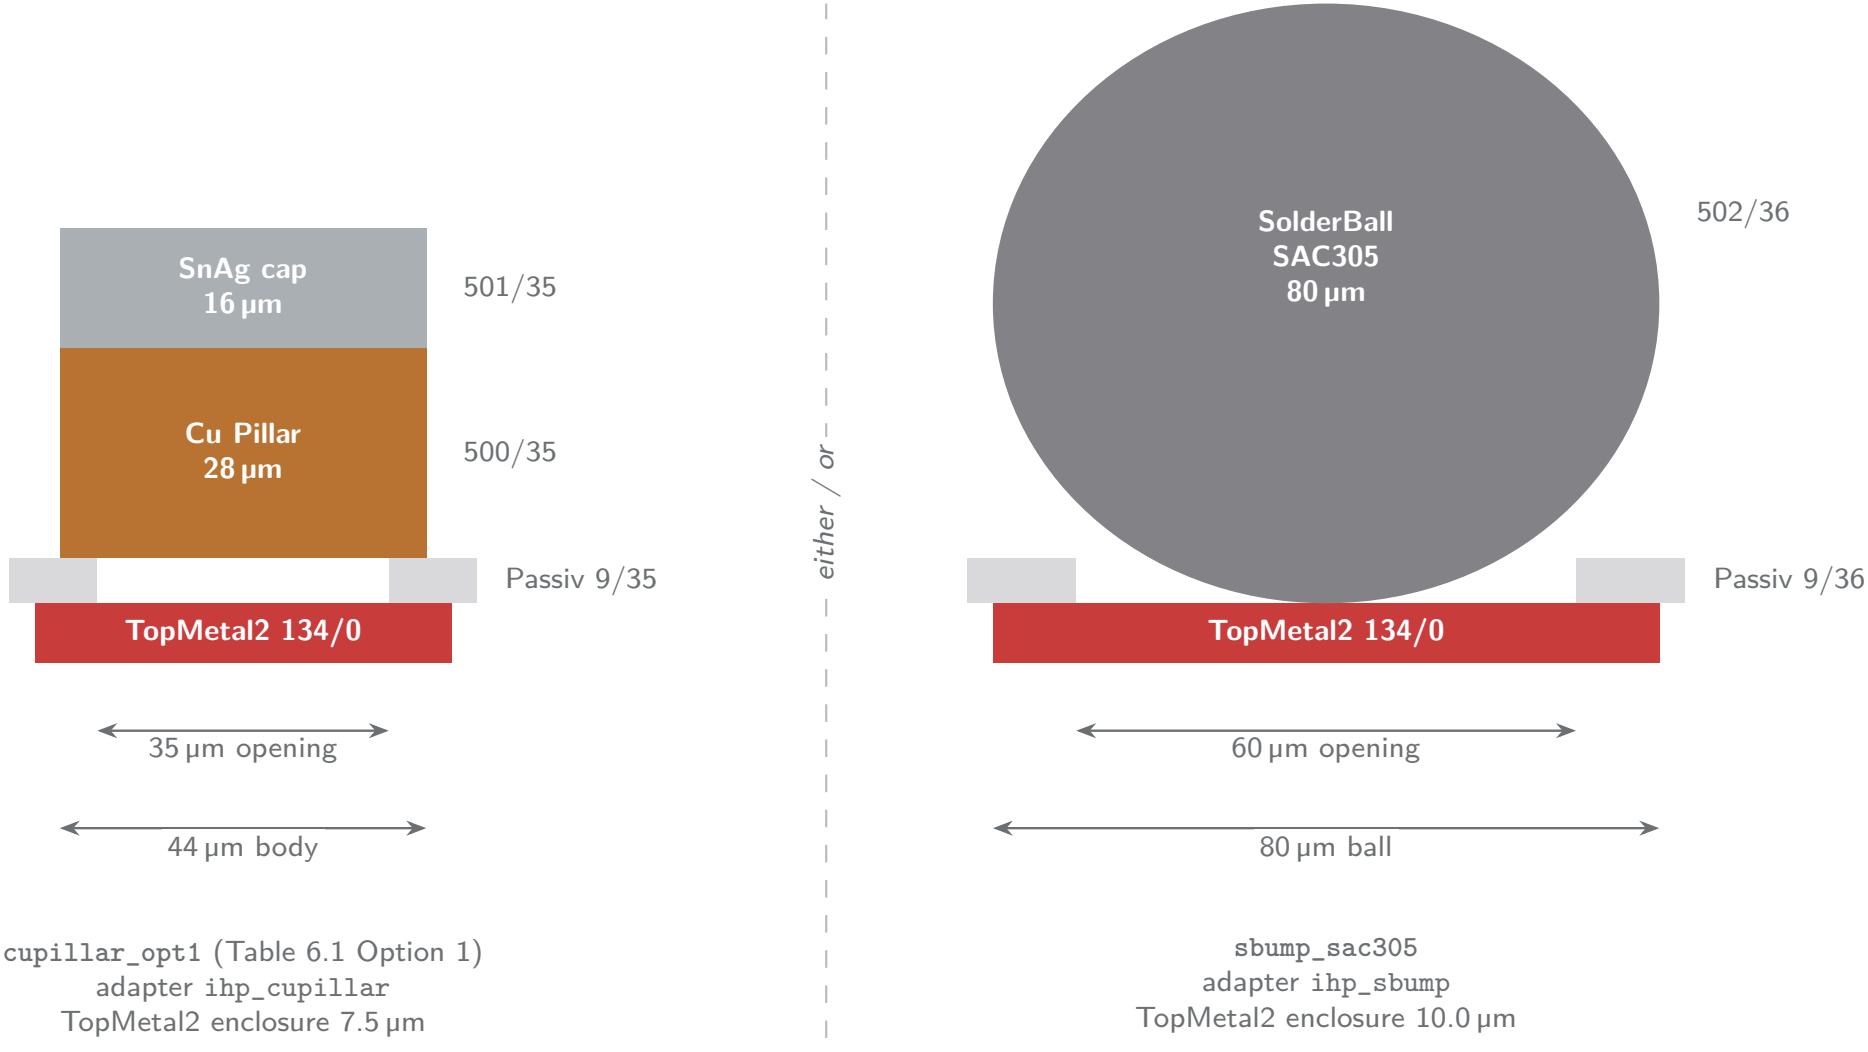

`cupillar_opt1` (Table 6.1 Option 1)
adapter `ihp_cupillar`
TopMetal2 enclosure 7.5 µm

`sbump_sac305`
adapter `ihp_sbump`
TopMetal2 enclosure 10.0 µm

The 500-range bodies are 3D aux layers, non-fabrication (EM/thermal simulation).
Datatype 35 is the pillar opening, datatype 36 the solder-bump opening.