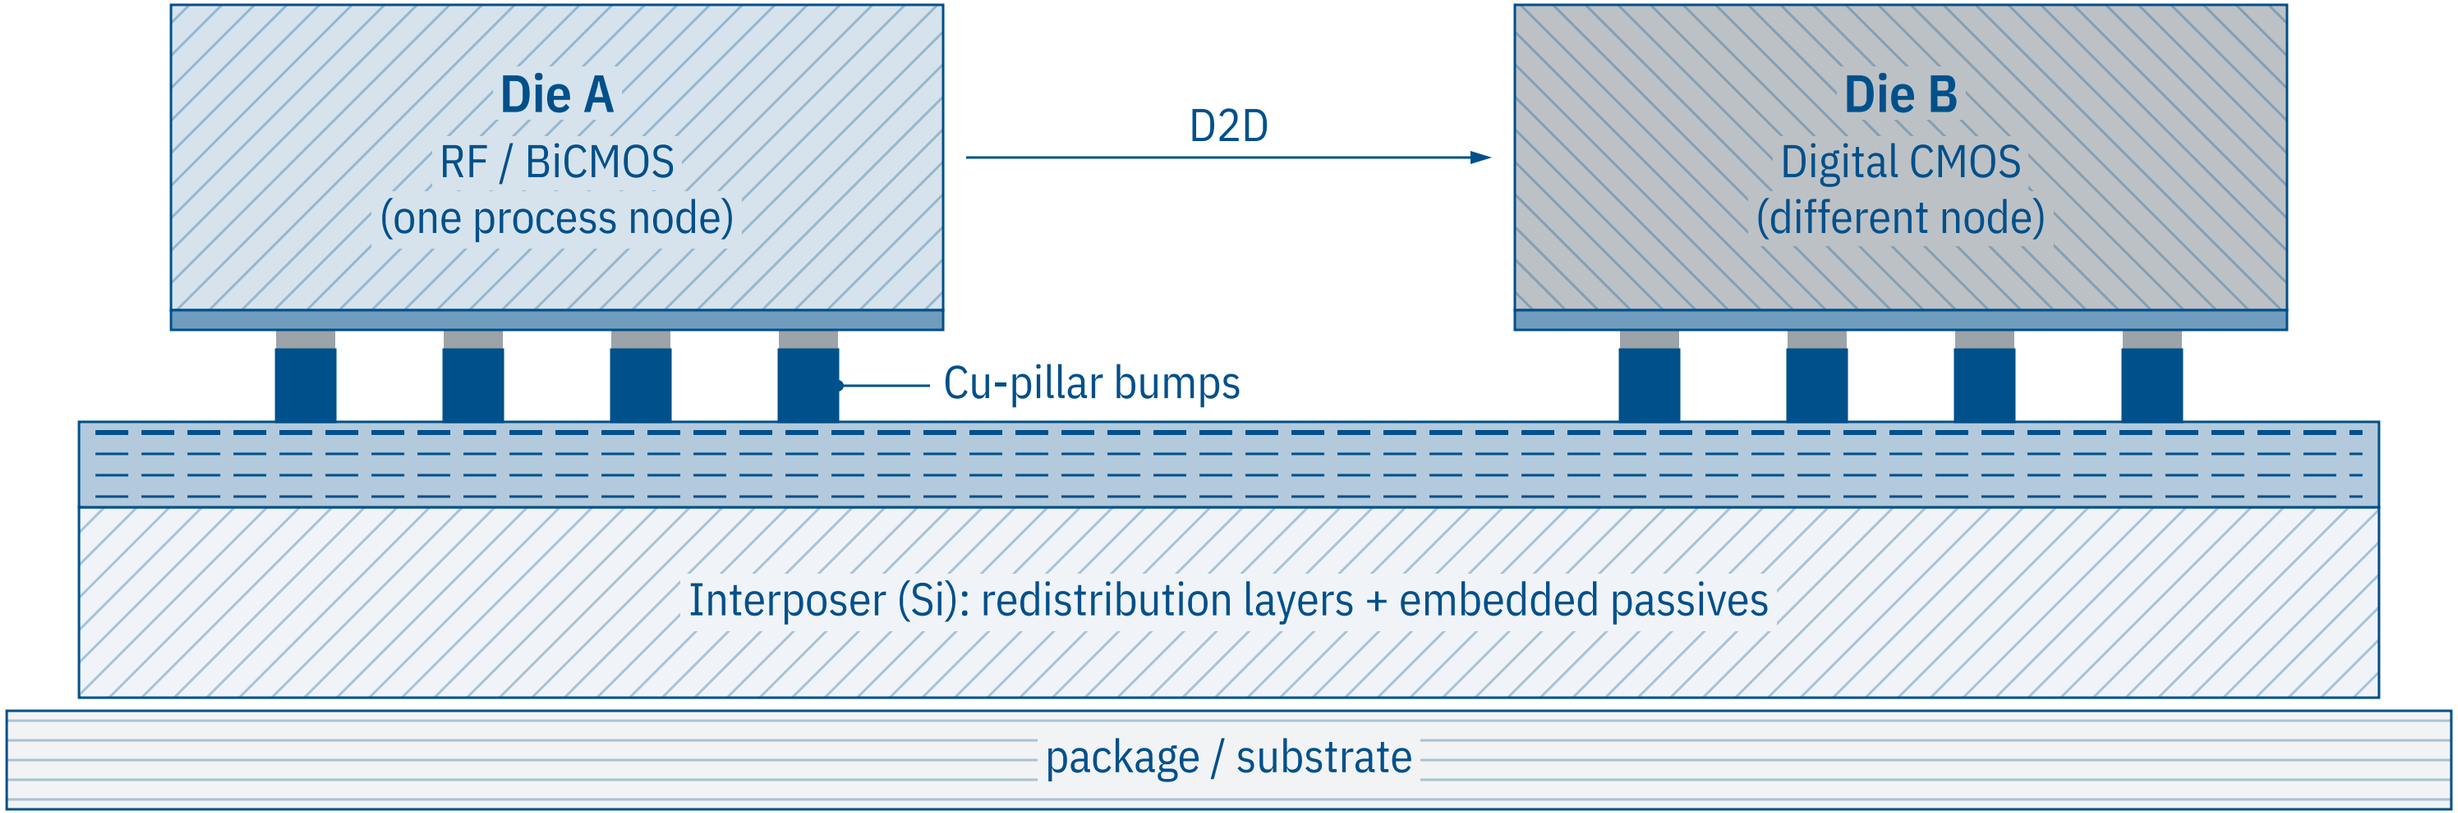
Die A
RF / BiCMOS
(one process node)
D2D
Die B
Digital CMOS
(different node)
Cu-pillar bumps
Interposer (Si): redistribution layers + embedded passives
package / substrate