

*Indian Standard*  
SPECIFICATION FOR  
METRIC SURVEYING CHAINS  
( *First Revision* )

---

Third Reprint DECEMBER 1986

( Incorporating Amendment No. 1 )

UDC 528.512



© Copyright 1977

INDIAN STANDARDS INSTITUTION  
MANAK BHAVAN, 9 BAHADUR SHAH ZAFAR MARG  
NEW DELHI 110002

# *Indian Standard*

## SPECIFICATION FOR METRIC SURVEYING CHAINS ( *First Revision* )

---

Optical and Mathematical Instruments Sectional Committee, EDC 36

*Chairman*

DR C. S. RAO

*Representing*

The Andhra Scientific Co Ltd, Masulipatam

*Members*

SHRI P. V. SUBBA RAO ( <i>Alternate</i> to Dr C. S. Rao )	
SHRI A. ALVARES	All India Instrument Manufacturers' and Dealers' Association, Bombay
SHRI S. R. TALPADE ( <i>Alternate</i> )	
MAJ P. S. BRAHMACHAREE	Ministry of Defence ( DGI )
SHRI S. K. GUPTA ( <i>Alternate</i> )	
SHRI R. R. CHAKRABORTY	The National Instruments Limited, Jadavpur
SHRI N. R. DAS GUPTA ( <i>Alternate</i> )	
CHIEF HYDROGRAPHER ( NAVY )	Indian Navy
DEPUTY DIRECTOR, STANDARDS ( TRACK )	Research, Designs & Standards Organisation ( Ministry of Railways ), Lucknow
ASSISTANT DIRECTOR, STANDARDS ( TRACK ) ( <i>Alternate</i> )	
SHRI S. K. GAUTAM	Quality Marked Goods Manufacturers' Co-operative Association Ltd, Roorkee
SHRI P. L. BHARDWAJ ( <i>Alternate</i> )	
SHRI A. GHOSH	National Test House, Calcutta
DR P. K. KATTI	Ministry of Defence ( R & D )
SHRI S. S. DHARMAYYA ( <i>Alternate</i> )	
SHRI D. D. KHOSLA	Directorate of Industries, Government of Haryana, Chandigarh
COL K. L. KHOSLA	Survey of India, Dehra Dun
SHRI V. KRISHNAMOORTHY	Directorate General of Technical Development, New Delhi
SHRI D. MAJUMDAR	Office of the Development Commissioner, Small Scale Industries ( Ministry of Industrial Development, Internal Trade & Company Affairs ), New Delhi
SHRI G. B. JAKHETIA ( <i>Alternate</i> )	
SHRI B. R. MANKHAND	The Koh-i-Noor ( India ) Private Ltd, Varanasi
LT-COL B. PAPANNA	Indian Army

( *Continued on page 2* )

---

**INDIAN STANDARDS INSTITUTION**  
MANAK BHAVAN, 9 BAHADUR SHAH ZAFAR MARG  
NEW DELHI 110002

( Continued from page 1 )

*Members*

DR J. PRASAD

SHRI RAM SINGH ( *Alternate* )

SHRI PREM PRAKASH

SHRI P. C. JAIN ( *Alternate* )

SHRI E. B. RAJDERKAR

DR I. RAMAKRISHNA RAO

PROF G. S. S. SARMA

LT-COL G. S. SIHOTA

SURVEYOR OF WORKS II ( UNDER  
SUPERINTENDING SURVEYOR OF  
WORKS I )

SHRI H. C. VERMA

SHRI J. A. UNVALA ( *Alternate* )

SHRI M. V. PATANKAR,

Director ( Mech Engg )

*Representing*

Central Scientific Instruments Organization ( CSIR ),  
Chandigarh

National Physical Laboratory ( CSIR ), New Delhi

Raj-Der-Kar & Co, Bombay

In personal capacity ( *Toshniwal Instruments and Engi-  
neering Co, 10A Najafgarh Road, New Delhi 15* )

Madras Institute of Technology, Madras

Directorate General of Armed Forces Medical  
Services ( Ministry of Defence ) New Delhi

Central Public Works Department, New Delhi

Associated Instrument Manufacturers ( India )  
Private Limited, New Delhi

Director General, ISI ( *Ex-officio Member* )

*Secretary*

SHRI S. P. ABBEY

Assistant Director ( Mech Engg ), ISI

Surveying Instruments Subcommittee, EDC 36 : 3

*Convener*

COL K. L. KHOSLA

Survey of India, Dehra Dun

*Members*

CHIEF HYDROGRAPHER ( NAVY )

SHRI N. R. DAS GUPTA

SHRI R. L. ACHARYA ( *Alternate* )

SHRI H. N. DE

SHRI R. C. JAIN ( *Alternate* )

SHRI S. S. DHARMAYYA

SHRI S. K. GAUTAM

Indian Navy

The National Instruments Limited, Jadavpur

Ministry of Defence ( DGI )

Ministry of Defence ( R & D )

Quality Marked Goods Manufacturers' Co-operative  
Association Ltd, Roorkee

SHRI JAI PRAKASH ( *Alternate* )

SHRI V. KRISHNAMOORTHY

Directorate General of Technical Development,  
New Delhi

SHRI C. NARAYANA RAO

DR J. PRASAD

The Andhra Scientific Co Ltd, Masulipatam

Central Scientific Instruments Organization ( CSIR ),  
Chandigarh

SHRI K. D. SHARMA ( *Alternate* )

SHRI PREM PRAKASH

SHRI P. C. JAIN ( *Alternate* )

National Physical Laboratory ( CSIR ), New Delhi

*Indian Standard*  
**SPECIFICATION FOR  
METRIC SURVEYING CHAINS  
( First Revision )**

**0. FOREWORD**

**0.1** This Indian Standard ( First Revision ) was adopted by the Indian Standards Institution on 28 October 1970, after the draft finalized by the Optical and Mathematical Instruments Sectional Committee had been approved by the Mechanical Engineering Division Council.

**0.2** This standard was first issued in 1959. The main modification made in this revision pertains to the inclusion of surveying chains of 5 m and 10 m lengths.

**0.3** For the purpose of deciding whether a particular requirement of this standard is complied with, the final value, observed or calculated, expressing the result of a test, shall be rounded off in accordance with IS:2-1960\*. The number of significant places retained in the rounded off value should be the same as that of the specified value in this standard.

---

**1. SCOPE**

**1.1** This standard covers the requirements for link type surveying chains of 5 m, 10 m, 20 m and 30 m lengths used in land measurement.

**2. TERMINOLOGY**

**2.0** For the purpose of this specification, the following definitions shall apply.

**2.1 Surveying Chain** — A length measuring device used for the purpose of obtaining surface distances between two points.

**2.2 Length of Chain** — The overall distance between the outside surface of the handles when fully stretched.

---

\*Rules for rounding off numerical values (*revised*).

**2.3 Tallies** — Metallic tags or indicators of distinctive patterns fixed at various distinctive points of the chain to facilitate quick reading of fractions of a chain in surveying measurements.

### 3. MATERIAL

**3.1** The different components of the chains shall be made from the materials mentioned against each:

<i>Component</i>	<i>Material</i>
Handle	Brass castings, preferably complying with IS : 292-1961*
Eye bolt, collar	Brass suitable for free cutting and high speed machining, preferably complying with IS : 319-1968†
Ring; link, small; link, large; link, connecting	Galvanized mild steel wire, 4.00 mm, preferably complying with IS : 280-1962‡
Tally	Brass sheet, preferably complying with Designation CuZn40 of IS : 410-1967§, or galvanized mild steel sheet, preferably complying with IS : 277-1969
Indicator ring	Brass wire

### 4. CONSTRUCTIONAL DETAILS

**4.1** The nomenclature of the different parts of the chains and their dimensions shall be as indicated in Fig. 1.

**4.2** To enable the reading of fractions of a chain without much difficulty, tallies shall be fixed at every metre length for chains of 5 m and 10 m lengths ( see Fig. 2 and 3 ) and at every five-metre length for chains of 20 m and 30 m lengths ( see Fig. 4 and 5 ). In the case of 20-m and 30-m chains, small brass rings shall be provided at every metre length except where tallies are attached. The tallies shall have distinctive shapes depending on their positions in chains as shown in Fig. 2 and 3.

**4.2.1** The shapes of tallies for chains of 5 m and 10 m lengths for different positions shall be as shown in Fig. 6.

\*Specification for brass ingots and castings ( revised ).

†Specification for free-cutting brass rods and sections ( second revision ).

‡Specification for mild steel wire for general engineering purpose ( revised ).

§Specification for rolled brass plate, sheet, strip and foil ( second revision ).

||Specification for galvanized steel sheets ( plain and corrugated ) ( second revision ).



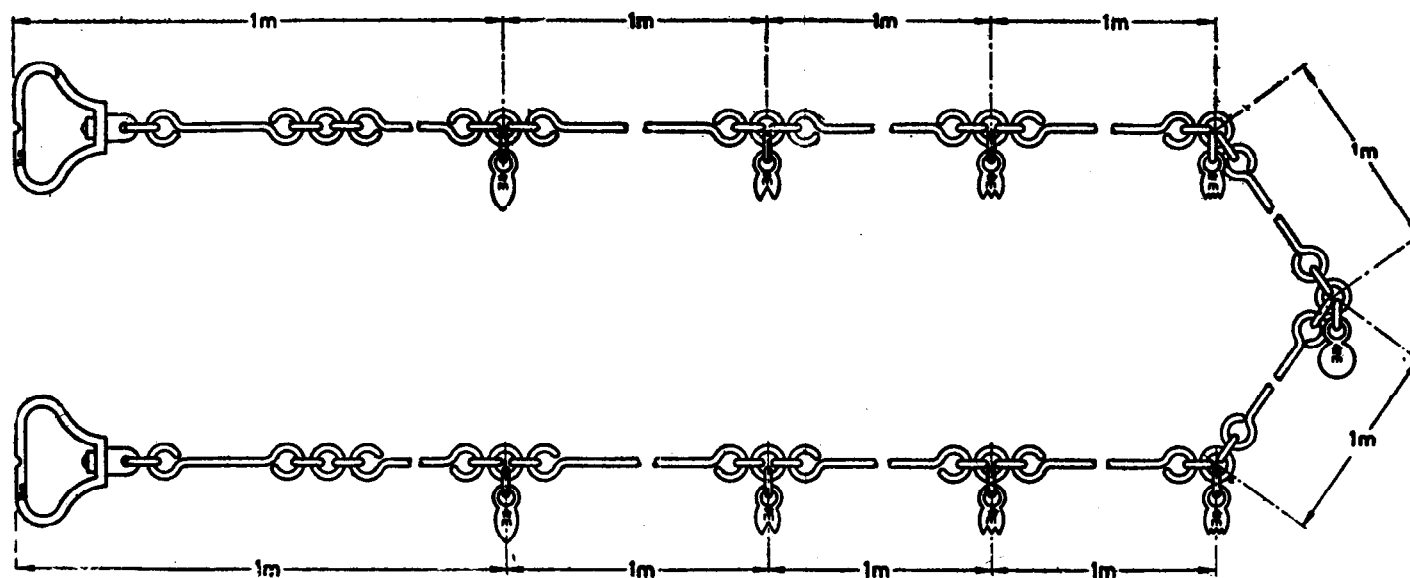


FIG. 3 10-METRE CHAIN

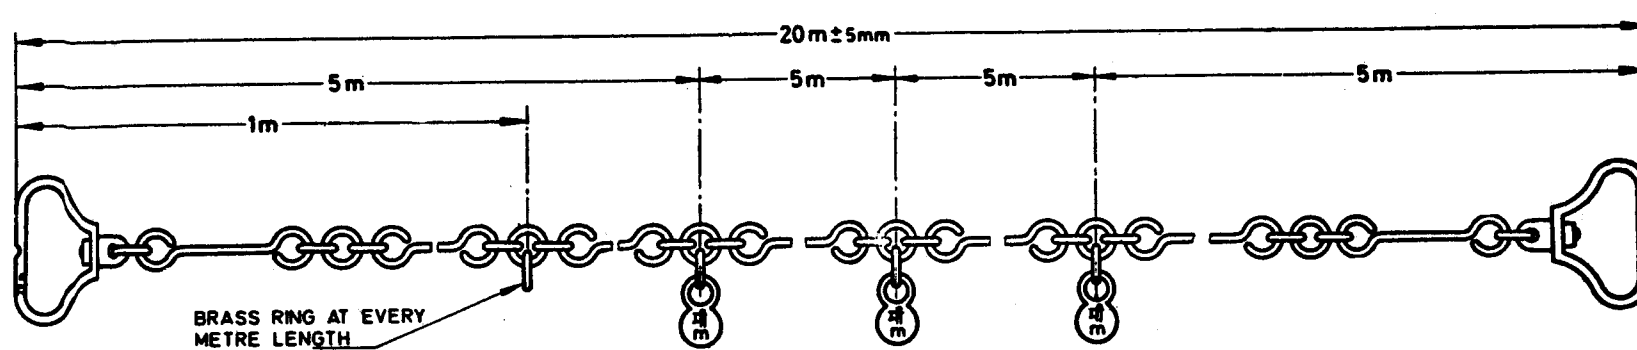


FIG. 4 20-METRE CHAIN


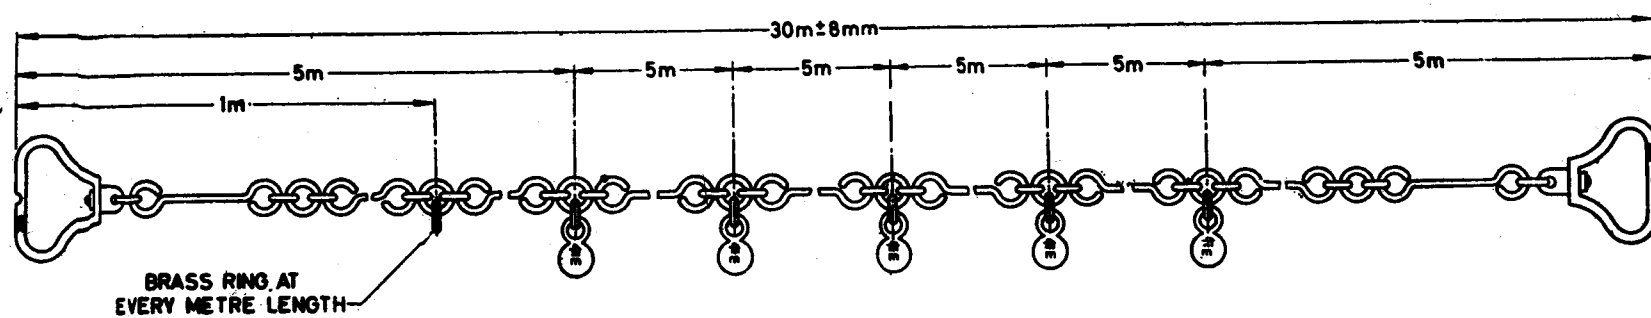


FIG. 5 30-METRE CHAIN



As in the Original Standard, this Page is Intentionally Left Blank

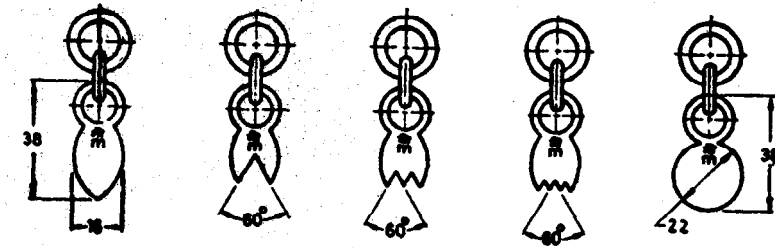

For 1 metre  
and 9 metres

For 2 metres  
and 8 metres

For 3 metres  
and 7 metres

For 4 metres  
and 6 metres

For 5 metres

FIG. 6 SHAPES OF TALLIES FOR CHAINS

4.3 The connecting links between two large links shall be oval in shape, the central one being a circular ring.

4.4 To facilitate holding the arrows (chain pins) in position with the handle of the chain, a groove shall be cut on the outside surface of the handle as shown in Fig. 1. The radius of the groove shall correspond to the radius of the arrows.

4.5 The handle joint shall have flexibility so that it would be possible to swivel the handle round the eye bolt. A swivel may also be provided at the middle of the chain.

## 5. TOLERANCES ON LENGTH

5.1 When measured with a tension of 8 kg and checked against a certified steel band or tape which has been standardized at 20°C, every metre length shall be accurate to within  $\pm 2$  mm and the overall length of the chains shall be within the following tolerances:

5-metre chains	$\pm 3$ mm
10-metre chains	$\pm 3$ mm
20-metre chains	$\pm 5$ mm
30-metre chains	$\pm 8$ mm

## 6. MARKING

6.1 The tallies used for marking distances in the metric chains shall be marked with the letters 'm' and 'm' (see Fig. 1 to 6) in order to distinguish them from non-metric chains.

6.2 The length of the chain, 5 m, 10 m, 20 m or 30 m as the case may be, shall be engraved on both the handles (see Fig. 2 to 5) to indicate the length and also to distinguish the chains from non-metric chains.

**6.3** The chains shall be indelibly marked on the reverse side of the surface of the handle having the denomination, with the manufacturer's name or trade-mark and, if required, the year of manufacture.

**6.4** The chains may also be marked with the ISI Certification Mark.

**NOTE** — The use of the ISI Certification Mark is governed by the provisions of the Indian Standards Institution ( Certification Marks ) Act and the Rules and Regulations made thereunder. The ISI Mark on products covered by an Indian Standard conveys the assurance that they have been produced to comply with the requirements of that standard under a well-defined system of inspection, testing and quality control which is devised and supervised by ISI and operated by the producer. ISI marked products are also continuously checked by ISI for conformity to that standard as a further safeguard. Details of conditions under which a licence for the use of the ISI Certification Mark may be granted to manufacturers or processors, may be obtained from the Indian Standards Institution.

## **7. PACKING**

**7.1** The chains shall be individually wrapped in grease-resisting paper and suitably packed in a packing case lined with kraft paper. The number of chains to be packed in the packing case shall be as follows:

<i>Length of Chain</i>	<i>Number</i>
5 m	20
10 m	10
20 m and 30 m	5



## INDIAN STANDARDS INSTITUTION

*Headquarters :*

Manak Bhavan, 9 Bahadur Shah Zafar Marg, NEW DELHI 110002

Telephones : 331 01 31, 331 13 75

**Telegrams : Manaksanstha**  
( Common to all offices )

### Regional Offices

## Telephone

\*Western : Manakalaya, E9 MIDC, Marol, Andheri ( East ),  
BOMBAY 400093

6 32 92 95

†Eastern : 1/14 C. I. T. Scheme VII M, V. I. P. Road,  
Maniktola, CALCUTTA 700054

36 24 99

**Southern : C. I. T. Campus, MADRAS 600113**

41 24 42

Northern : B69 Phase VII, Industrial Focal Point,  
S. A. S. NAGAR 160051 ( Punjab )

87926

### Branch Offices

'Pushpak' Nurmohamed Shaikh Marg, Khanpur,  
AHMADABAD 380001

12 63 48

2 63 49

'F' Block Unity Bldg, Narasimharaja Square,  
BANGALORE 560002

22 48 05

Gangotri Complex, Bhadbhada Road, T. T. Nagar,  
BHOPAL 462003

6 27 16

22E Kalpana Area, BHUBANESHWAR 751014

5 36 27

5-8-56C L. N. Gupta Marg, HYDERABAD 500001

22 10 83

R14 Yudhister Marg, C Scheme, JAIPUR 302005

6 98 32

117/418 B Sarvodaya Nagar, KANPUR 208005

4 79 09

Patliputra Industrial Estate, PATNA 800013

6 23 05

Hantex Bldg ( 2nd Floor ), Rly Station Road,  
TRIVANDRUM 695001

39 27

**Inspection Office ( With Sale Point ) :**

Institution of Engineers ( India ) Building, 1332 Shivaji Nagar,  
PUNE 411005

5 24 35

\*Sales Office in Bombay is at Novelty Chambers, Grant Road, Bombay 400007

89 65 20

†Sales Office in Calcutta is at 5 Chowringhee Approach, P O. Princep Street, Calcutta 700072

27 68 00

AMENDMENT NO. 2 DECEMBER 1979

TO

IS:1492-1970 SPECIFICATION FOR METRIC SURVEYING CHAINS

*(First Revision)*

Alteration

(Page 9, clause 5.1, line 2) - Substitute ' $27 \pm 2^{\circ}\text{C}$ '  
for ' $20^{\circ}\text{C}$ '.

(EDC 36)

---

Printed at Simco Printing Press, Delhi, India