

IS : 1492 - 1970

(Reaffirmed 1998)

Edition 2.2

(1979-12)

Indian Standard
**SPECIFICATION FOR
METRIC SURVEYING CHAINS**
(First Revision)

(Incorporating Amendment Nos. 1 & 2)

UDC 528.512

© BIS 2003

BUREAU OF INDIAN STANDARDS
MANAK BHAVAN, 9 BAHADUR SHAH ZAFAR MARG
NEW DELHI 110002

Price Group 4

Indian Standard

SPECIFICATION FOR METRIC SURVEYING CHAINS

(*First Revision*)

Optical and Mathematical Instruments Sectional Committee, EDC 36

Chairman

DR C. S. RAO

Representing

The Andhra Scientific Co Ltd, Masulipatam

Members

SHRI P. V. SUBBA RAO (*Alternate* to
Dr. C. S. Rao)

SHRI A. ALVARES
SHRI S. R. TALPADE (*Alternate*)

MAJ P. S. BRAHMACHAREE
SHRI S. K. GUPTA (*Alternate*)

SHRI R. R. CHAKRABORTY
SHRI N. R. DAS GUPTA (*Alternate*)

CHIEF HYDROGRAPHER (NAVY)
DEPUTY DIRECTOR, STANDARDS (TRACK)
ASSISTANT DIRECTOR, STANDARDS
(TRACK) (*Alternate*)

SHRI S. K. GAUTAM
SHRI P. L. BHARDWAJ (*Alternate*)

SHRI A. GHOSH
DR P. K. KATTI
SHRI S. S. DHARMAYYA (*Alternate*)

SHRI D. D. KHOSLA

COL K. L. KHOSLA

SHRI V. KRISHNAMOORTHY

SHRI D. MAJUMDAR
SHRI G. B. JAKHETIA (*Alternate*)

SHRI B. R. MANKHAND
LT-COL B. PAPANNA

All India Instrument Manufacturers' and
Dealers' Association, Bombay
Ministry of Defence (DGI)

The National Instruments Limited, Jadavpur

Indian Navy
Research, Designs & Standards Organisation
(Ministry of Railways), Lucknow

Quality Marked Goods Manufacturers'
Co-operative Association Ltd, Roorkee
National Test House, Calcutta
Ministry of Defence (R & D)

Directorate of Industries, Government of
Haryana, Chandigarh

Survey of India, Dehra Dun

Directorate General of Technical
Development, New Delhi

Office of the Development Commissioner,
Small Scale Industries (Ministry of
Industrial Development, Internal Trade &
Company Affairs), New Delhi

The Koh-i-Noor (India) Private Ltd, Varanasi
Indian Army

(*Continued on page 2*)

BUREAU OF INDIAN STANDARDS
MANAK BHAVAN, 9 BAHADUR SHAH ZAFAR MARG
NEW DELHI 110002

IS : 1492 - 1970

(Continued from page 1)

Members

DR J. PRASAD
SHRI RAM SINGH (*Alternate*)
SHRI PREM PRAKASH
SHRI P. C. JAIN (*Alternate*)
SHRI E. B. RAJDERKAR
DR I. RAMAKRISHNA RAO

PROF G. S. S. SARMA
LT-COL G. S. SIHOTA

SURVEYOR OF WORKS II (UNDER
SUPERINTENDING SURVEYOR OF
WORKS I)
SHRI H. C. VERMA
SHRI J. A. UNVALA (*Alternate*)
SHRI M. V. PATANKAR,
Director (Mech Engg)

Representing

Central Scientific Instrument Organization
(CSIR), Chandigarh
National Physical Laboratory (CSIR), New
Delhi
Raj-Der-Kar & Co, Bombay
In personal capacity (*Toshniwal Instruments
and Engineering Co, 10A Najafgarh Road,
New Delhi 15*)
Madras Institute of Technology, Madras
Directorate General of Armed Forces Medical
Services (Ministry of Defence) New Delhi
Central Public Works Department, New Delhi

Associated Instrument Manufacturers (India)
Private Limited, New Delhi
Director General, ISI (*Ex-officio Member*)

Secretary

SHRI S. P. ABBEY
Assistant Director (Mech Engg), ISI

Surveying Instruments Subcommittee, EDC 36 : 3

Convener

COL K. L. KHOSLA

Survey of India, Dehra Dun

Members

CHIEF HYDROGRAPHER (NAVY)
SHRI N. R. DAS GUPTA
SHRI R. L. ACHARYA (*Alternate*)
SHRI H. N. DE
SHRI R. C. JAIN (*Alternate*)
SHRI S. S. DHARMAYYA
SHRI S. K. GAUTAM
SHRI JAI PRAKASH (*Alternate*)
SHRI V. KRISHNAMOORTHY

SHRI C. NARAYANA RAO
DR J. PRASAD
SHRI K. D. SHARMA (*Alternate*)
SHRI PREM PRAKASH
SHRI P. C. JAIN (*Alternate*)

Indian Navy
The National Instruments Limited, Jadavpur

Ministry of Defence (DGI)

Ministry of Defence (R & D)
Quality Marked Goods Manufacturers'
Co-operative Association Ltd, Roorkee
Directorate General of Technical
Development, New Delhi
The Andhra Scientific Co Ltd, Masulipatam
Central Scientific Instruments Organization
(CSIR), Chandigarh
National Physical Laboratory (CSIR), New
Delhi

Indian Standard
SPECIFICATION FOR
METRIC SURVEYING CHAINS
(First Revision)

0. FOREWORD

0.1 This Indian Standard (First Revision) was adopted by the Indian Standards Institution on 28 October 1970, after the draft finalized by the Optical and Mathematical Instruments Sectional Committee had been approved by the Mechanical Engineering Division Council.

0.2 This standard was first issued in 1959. The main modification made in this revision pertains to the inclusion of surveying chains of 5 m and 10 m lengths.

0.3 This edition 2.2 incorporates Amendment No. 2 (December 1979). Side bar indicates modification of the text as the result of incorporation of the amendment. Amendment No. 1 had been incorporated earlier.

0.4 For the purpose of deciding whether a particular requirement of this standard is complied with, the final value, observed or calculated, expressing the result of a test, shall be rounded off in accordance with IS : 2-1960*. The number of significant places retained in the rounded off value should be the same as that of the specified value in this standard.

1. SCOPE

1.1 This standard covers the requirements for link type surveying chains of 5 m, 10 m, 20 m and 30 m lengths used in land measurement.

2. TERMINOLOGY

2.0 For the purpose of this specification, the following definitions shall apply.

2.1 Surveying Chain — A length measuring device used for the purpose of obtaining surface distances between two points.

2.2 Length of Chain — The overall distance between the outside surface of the handles when fully stretched.

*Rules for rounding off numerical values (*revised*).

IS : 1492 - 1970

2.3 Tallies — Metallic tags or indicators of distinctive patterns fixed at various distinctive points of the chain to facilitate quick reading of fractions of a chain in surveying measurements.

3. MATERIAL

3.1 The different components of the chains shall be made from the materials mentioned against each:

<i>Component</i>	<i>Material</i>
Handle	Brass castings, preferably complying with IS : 292-1961*
Eye bolt, collar	Brass suitable for free cutting and high speed machining, preferably complying with IS : 319-1968†
Ring; link, small; link, large; link, connecting	Galvanized mild steel wire, 4.00 mm, preferably complying with IS : 280-1962‡
Tally	Brass sheet, preferably complying with Designation CuZn40 of IS : 410-1967§, or galvanized mild steel sheet, preferably complying with IS : 277-1969
Indicator ring	Brass wire

4. CONSTRUCTIONAL DETAILS

4.1 The nomenclature of the different parts of the chains and their dimensions shall be as indicated in Fig. 1.

4.2 To enable the reading of fractions of a chain without much difficulty, tallies shall be fixed at every metre length for chains of 5 m and 10 m lengths (see Fig. 2 and 3) and at every five-metre length for chains of 20 m and 30 m lengths (see Fig. 4 and 5). In the case of 20-m and 30-m chains, small brass rings shall be provided at every metre length except where tallies are attached. The tallies shall have distinctive shapes depending on their positions in chains as shown in Fig. 2 and 3.

4.2.1 The shapes of tallies for chains of 5 m and 10 m lengths for different positions shall be as shown in Fig. 6.

*Specification for brass ingots and castings (*revised*).

†Specification for free-cutting brass rods and sections (*second revision*).

‡Specification for mild steel wire for general engineering purpose (*revised*).

§Specification for rolled brass plate, sheet, strip and foil (*second revision*).

||Specification for galvanized steel sheets (plain and corrugated) (*second revision*).

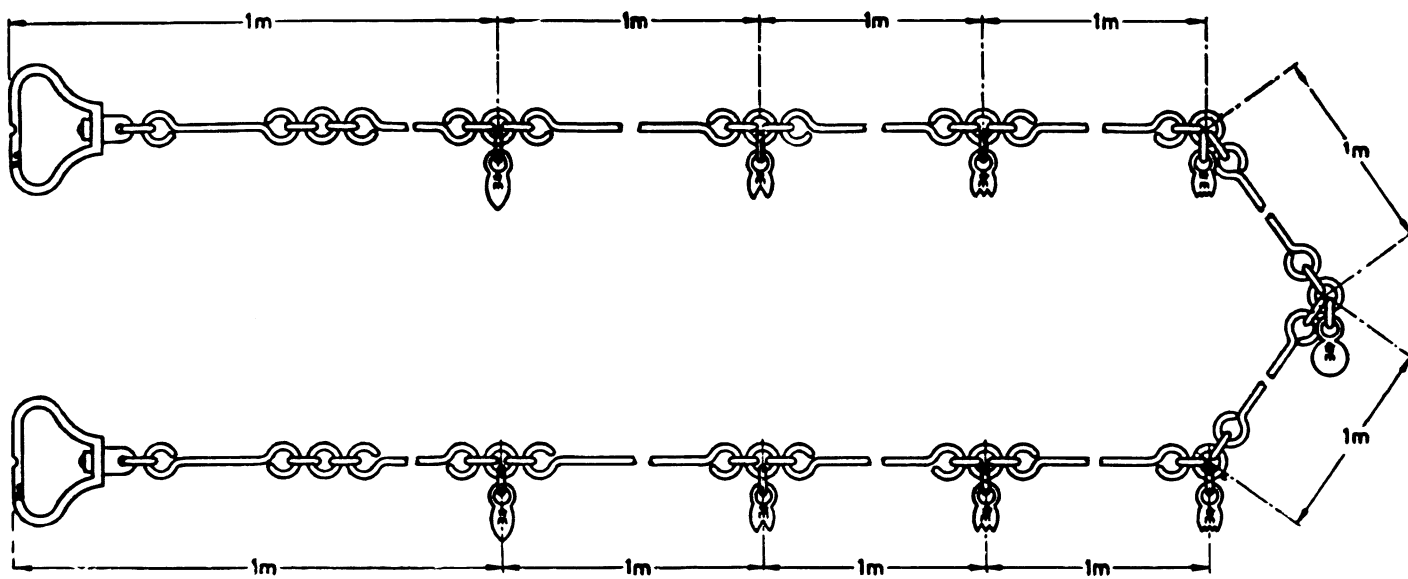


FIG. 3 10-METRE CHAIN

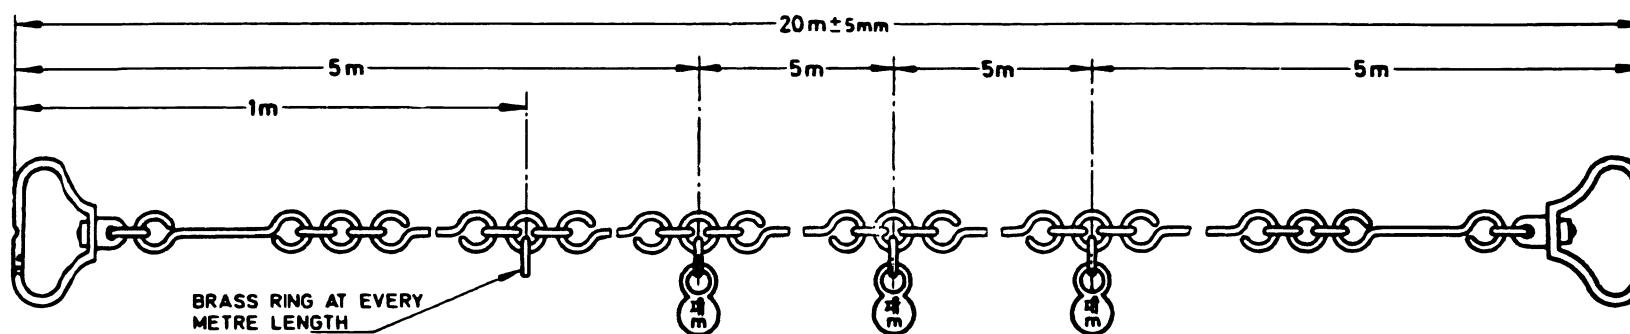


FIG. 4 20-METRE CHAIN

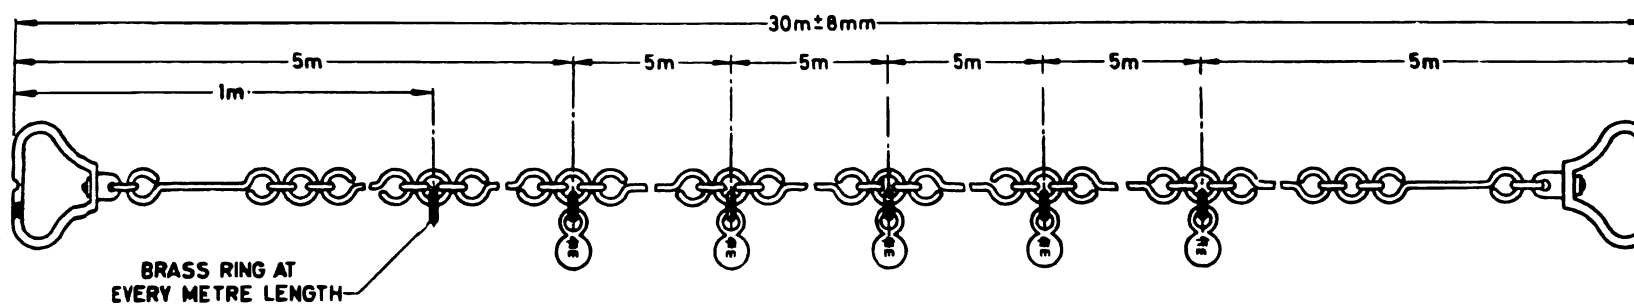


FIG. 5 30-METRE CHAIN

As in the Original Standard, this Page is Intentionally Left
Blank

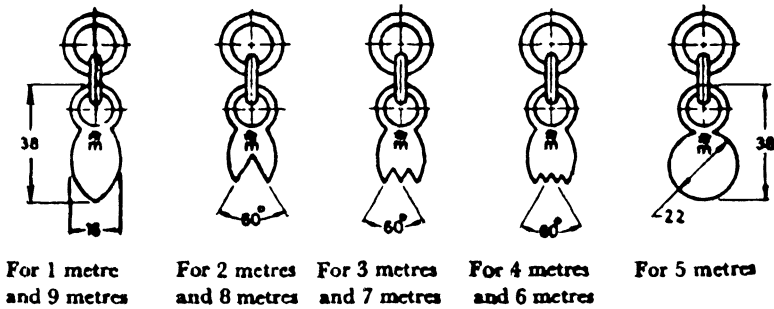


FIG. 6 SHAPES OF TALLIES FOR CHAINS

4.3 The connecting links between two large links shall be oval in shape, the central one being a circular ring.

4.4 To facilitate holding the arrows (chain pins) in position with the handle of the chain, a groove shall be cut on the outside surface of the handle as shown in Fig. 1. The radius of the groove shall correspond to the radius of the arrows.

4.5 The handle joint shall have flexibility so that it would be possible to swivel the handle round the eye bolt. A swivel may also be provided at the middle of the chain.

5. TOLERANCES ON LENGTH

5.1 When measured with a tension of 8 kg and checked against a certified steel band or tape which has been standardized at $27 \pm 2^\circ\text{C}$, every metre length shall be accurate to within ± 2 mm and the overall length of the chains shall be within the following tolerances:

5-metre chains	± 3 mm
10-metre chains	± 3 mm
20-metre chains	± 5 mm
30-metre chains	± 8 mm

6. MARKING

6.1 The tallies used for marking distances in the metric chains shall be marked with the letters 'm' and 'm' (see Fig. 1 to 6) in order to distinguish them from non-metric chains.

6.2 The length of the chain, 5 m, 10 m, 20 m or 30 m as the case may be, shall be engraved on both the handles (see Fig. 2 to 5) to indicate the length and also to distinguish the chains from non-metric chains.

IS : 1492 - 1970

6.3 The chains shall be indelibly marked on the reverse side of the surface of the handle having the denomination, with the manufacturer's name or trade-mark and, if required, the year of manufacture.

6.4 The chains may also be marked with the ISI Certification Mark.

NOTE — The use of the ISI Certification Mark is governed by the provisions of the Indian Standards Institution (Certification Marks) Act and the Rules and Regulations made thereunder. The ISI Mark on products covered by an Indian Standard conveys the assurance that they have been produced to comply with the requirements of that standard under a well-defined system of inspection, testing and quality control which is devised and supervised by ISI and operated by the producer. ISI marked products are also continuously checked by ISI for conformity to that standard as a further safeguard. Details of conditions under which a licence for the use of the ISI Certification Mark may be granted to manufacturers or processors, may be obtained from the Indian Standards Institution.

7. PACKING

7.1 The chains shall be individually wrapped in grease-resisting paper and suitably packed in a packing case lined with kraft paper. The number of chains to be packed in the packing case shall be as follows:

<i>Length of Chain</i>	<i>Number</i>
5 m	20
10 m	10
20 m and 30 m	5

Bureau of Indian Standards

BIS is a statutory institution established under the *Bureau of Indian Standards Act*, 1986 to promote harmonious development of the activities of standardization, marking and quality certification of goods and attending to connected matters in the country.

Copyright

BIS has the copyright of all its publications. No part of these publications may be reproduced in any form without the prior permission in writing of BIS. This does not preclude the free use, in the course of implementing the standard, of necessary details, such as symbols and sizes, type or grade designations. Enquiries relating to copyright be addressed to the Director (Publications), BIS.

Review of Indian Standards

Amendments are issued to standards as the need arises on the basis of comments. Standards are also reviewed periodically; a standard along with amendments is reaffirmed when such review indicates that no changes are needed; if the review indicates that changes are needed, it is taken up for revision. Users of Indian Standards should ascertain that they are in possession of the latest amendments or edition by referring to the latest issue of ‘BIS Catalogue’ and ‘Standards : Monthly Additions’.

This Indian Standard has been developed by Technical Committee : EDC 36

Amendments Issued Since Publication	
Amend No.	Date of Issue
Amd. No. 1	Incorporated earlier
Amd. No. 2	December 1979

BUREAU OF INDIAN STANDARDS

Headquarters:

Manak Bhavan, 9 Bahadur Shah Zafar Marg, New Delhi 110002.
Telephones: 323 01 31, 323 33 75, 323 94 02

Telegrams: Manaksanstha
(Common to all offices)

Regional Offices:		Telephone
Central	: Manak Bhavan, 9 Bahadur Shah Zafar Marg NEW DELHI 110002	{ 323 76 17 323 38 41
Eastern	: 1/14 C. I. T. Scheme VII M, V. I. P. Road, Kankurgachi KOLKATA 700054	{ 337 84 99, 337 85 61 337 86 26, 337 91 20
Northern	: SCO 335-336, Sector 34-A, CHANDIGARH 160022	{ 60 38 43 60 20 25
Southern	: C. I. T. Campus, IV Cross Road, CHENNAI 600113	{ 235 02 16, 235 04 42 235 15 19, 235 23 15
Western	: Manakalaya, E9 MIDC, Marol, Andheri (East) MUMBAI 400093	{ 832 92 95, 832 78 58 832 78 91, 832 78 92
Branches	: AHMEDABAD. BANGALORE. BHOPAL. BHUBANESHWAR. COIMBATORE. FARIDABAD. GHAZIABAD. GUWAHATI. HYDERABAD. JAIPUR. KANPUR. LUCKNOW. NAGPUR. NALAGARH. PATNA. PUNE. RAJKOT. THIRUVANANTHAPURAM. VISHAKHAPATNAM	