



Transformer (ACC-T24V-100)

DS-ACC-24T-100 Rev A

Specifications

VA Rating: 100

Frequency 50/60 Hz

Mounting: Foot & Dual Threaded Hubs, secure mount with hub and opposite foot mounts

Over Current Protection: Circuit Breaker

Dimensions: 3.000" x 2.500" x 4.250:
(w/.500" NPT Hubs)

Wire Length: (min 8") 9.5" Typical w/.5"

Strip


Operating temperature: -30 to 140° F

MTBF: 100,000 Hours @ 77° F

Construction: Split-Bobbin

Weight: 4.60 lbs.

Approvals: Class 2 UL5085-3 Listed, C-UL, CE, RoHS

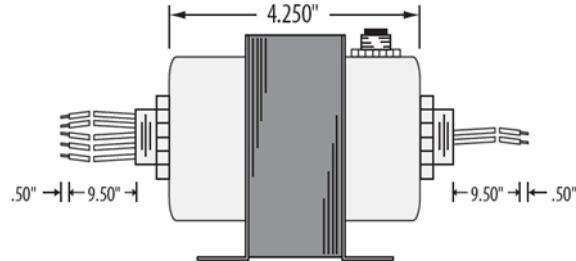

PRIMARY WIRES

Grey - 480 Vac

Brn - 277 Vac

Org - 240 Vac

Wht - 120 Vac

Blk - Comm

SECONDARY WIRES

Yel/Wht - 24 Vac*

Yel - Comm

*Secondary Yel/Wht wire in phase with Primary Blk wire.

Ordering

Control Panel

PCU-IDS Protector Panel

Touch Screen

Ce-TS Touch Screen

Expansion Modules

Ce-2ZI 2 Zone Input

Ce-8ZI 8 Zone Input

Ce-4RO 4 Relay Output

Ce-24ZI 24 Zone Input

Communication Modules

Ce-FC-N Fiber Conversion

Ce-TCP/IP Network Module

Ce-FC-ER Fiber Conversion

CeLAN Modules

Ce-DS938Z Motion

Ce-DS308 Motion

Ce-DSISC Motion

Ce-M3ZS HSS L2 Contact

Ce-M1ZRS Recessed Contact

Ce-1076DRS Recessed Contact

Ce-1076HRS Recessed Contact

Ce-U1Z Universal 1 Zone

Ce-WF2ZI Wellsfargo Contact

Ce-U2Z Universal 2 Zone

Receivers

Ce-AESR-IDS AES Receiver

CeLAN Accessories

CO-CSU Cinch Stick

CO-PS2KI Keyboard Module

CO-T-P Panel Tester

CO-T-8Z 8 Zone Tester

CO-T-4R 4 Relay Tester

CO-T-Printer Printer Tester

CO-PRSI Siren Supervision

Ce-EX Expansion Module

Power

ACC-T24V-100 Transformer

ACC-B12-18 18Ahr Battery

ACC-B12-7 7Ahr Battery

ACC-6P Power Cord

E-CB Termination Box

Accessories

L-M-KD Panel Lock

L-M-KA Panel Lock

ACC-CFC-S Fiber Cable

L-S Standard Panel Lock

ACC-CFC-MM Fiber Cable

S-ET Panel Tamper

Enclosures

E-P Panel Enclosure

E-P-Kit

E-CP Plastic Enclosure

E-PA Accessory Enclosure

E-PA-Kit

E-PA-S Small Accessory Enclosure

E-PA-S-Kit

For more information: www.cinchsystems.com

Cinch Systems

10275 43rd St NE, Ste 300

St Michael, MN 55379

1-763-497-1059



CINCH
AES ENCRYPTED