




Project*

First Saved	Monday, July 20, 2026
Last Saved	Tuesday, July 21, 2026
Product Version	2025 R2
Save Project Before Solution	No
Save Project After Solution	No

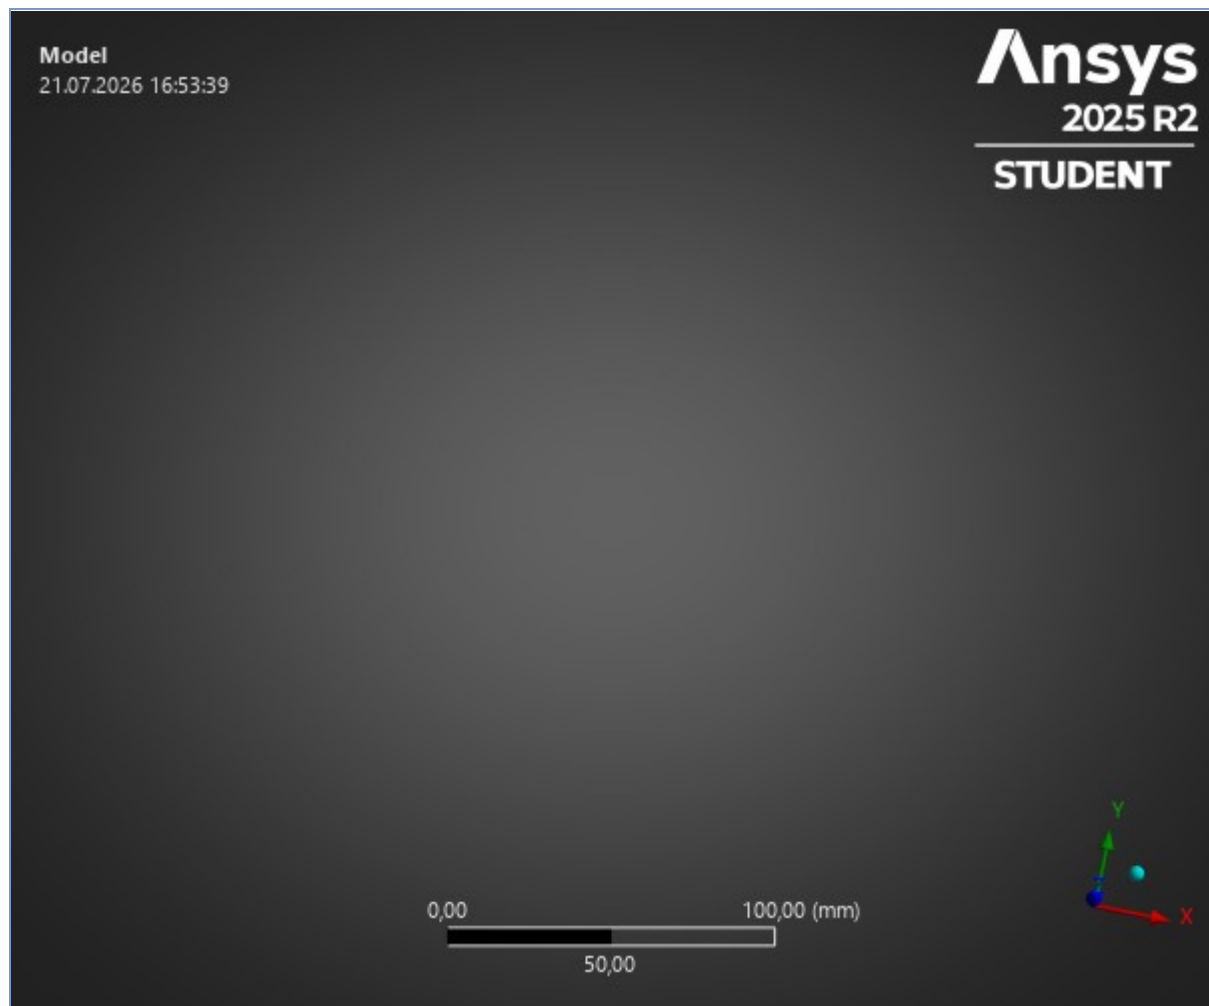

Contents

- [Units](#)
- [Model \(B4\)](#)
 - [Geometry Imports](#)
 - [Geometry Import \(B3\)](#)
 - [Geometry](#)
 - [Parts](#)
 - [Materials](#)
 - [Coordinate Systems](#)
 - [Connections](#)
 - [Contacts](#)
 - [Frictional - SYS-1\Твердое тело То Втулка\Solid](#)
 - [Mesh](#)
 - [Face Sizing](#)
 - [Static Structural \(B5\)](#)
 - [Analysis Settings](#)
 - [Rotational Velocity](#)
 - [Loads](#)
 - [Solution \(B6\)](#)
 - [Solution Information](#)
 - [Results](#)
 - [Stress Tool](#)
 - [Safety Factor](#)
 - [Stress Tool 2](#)
 - [Safety Factor](#)
- [Material Data](#)
 - [Structural Steel](#)
 - [PA12-CF10](#)

Units

TABLE 1

Unit System	Metric (mm, kg, N, s, mV, mA) Degrees rad/s Celsius
Angle	Degrees
Rotational Velocity	rad/s
Temperature	Celsius

Model (B4)

TABLE 2

Model (B4) > Geometry Imports

Object Name	<i>Geometry Imports</i>
State	Solved

TABLE 3

Model (B4) > Geometry Imports > Geometry Import (B3)

Object Name	<i>Geometry Import (B3)</i>
State	Solved
Definition	
Source	C:\Users\User\Desktop\Прочностные характеристики\All_work_files\dp0\SYS-1\DM\SYS-1.scdocx

Type	SpaceClaim
Basic Geometry Options	
Solid Bodies	Yes
Surface Bodies	Yes
Line Bodies	Yes
Parameters	Independent
Parameter Key	
Attributes	Yes
Attribute Key	
Named Selections	Yes
Named Selection Key	
Material Properties	Yes
Advanced Geometry Options	
Use Associativity	Yes
Coordinate Systems	Yes
Coordinate System Key	
Reader Mode Saves Updated File	No
Use Instances	Yes
Smart CAD Update	Yes
Compare Parts On Update	No
Analysis Type	3-D
Mixed Import Resolution	None
Import Facet Quality	Source
Clean Bodies On Import	No
Stitch Surfaces On Import	None
Decompose Disjoint Geometry	Yes
Enclosure and Symmetry Processing	Yes

Geometry

TABLE 4
Model (B4) > Geometry

Object Name	Geometry
State	Fully Defined
Definition	
Source	C:\Users\User\Desktop\Прочностные характеристики\All_work_files\dp0\SYS-1\DM\SYS-1.scdocx
Type	SpaceClaim
Length Unit	Meters
Element Control	Program Controlled
Display Style	Body Color
Bounding Box	
Length X	200, mm
Length Y	200, mm
Length Z	50,512 mm
Properties	
Volume	6,9256e+005 mm ³
Mass	0,8257 kg
Scale Factor Value	1,
Statistics	
Bodies	2
Active Bodies	2
Nodes	127233
Elements	70153

Mesh Metric	None
Update Options	
Assign Default Material	No
Basic Geometry Options	
Solid Bodies	Yes
Surface Bodies	Yes
Line Bodies	Yes
Parameters	Independent
Parameter Key	
Attributes	Yes
Attribute Key	
Named Selections	Yes
Named Selection Key	
Material Properties	Yes
Advanced Geometry Options	
Use Associativity	Yes
Coordinate Systems	Yes
Coordinate System Key	
Reader Mode Saves Updated File	No
Use Instances	Yes
Smart CAD Update	Yes
Compare Parts On Update	No
Analysis Type	3-D
Mixed Import Resolution	None
Import Facet Quality	Source
Clean Bodies On Import	No
Stitch Surfaces On Import	None
Decompose Disjoint Geometry	Yes
ID_GeometryPrefProcessPhysicsDefinition	No
Enclosure and Symmetry Processing	Yes

TABLE 5
Model (B4) > Geometry > Parts

Model B47 - Geometry - Parts		
Object Name	Втулка\Solid	SYS-1\Твердое тело
State	Meshed	
Graphics Properties		
Visible	Yes	
Transparency	1	
Definition		
Suppressed	No	
Stiffness Behavior	Flexible	
Coordinate System	Default Coordinate System	
Reference Temperature	By Environment	
Treatment	None	
Material		
Assignment	Structural Steel	PA12-CF10
Nonlinear Effects	Yes	
Thermal Strain Effects	Yes	
Bounding Box		
Length X	30,04 mm	200, mm
Length Y	30,04 mm	200, mm
Length Z	49,5 mm	50,512 mm
Properties		
Volume	15483 mm³	6,7708e+005 mm³
Mass	0,12154 kg	0,70416 kg
Centroid X	-1,0201e-015 mm	-3,1788e-004 mm

Centroid Y	-0,61774 mm	-1,5158e-005 mm
Centroid Z	21,75 mm	12,6 mm
Moment of Inertia Ip1	34,891 kg·mm²	1322,2 kg·mm²
Moment of Inertia Ip2	35,835 kg·mm²	1322,2 kg·mm²
Moment of Inertia Ip3	21,119 kg·mm²	2449,5 kg·mm²
Statistics		
Nodes	4113	123120
Elements	731	69422
Mesh Metric	None	
CAD Attributes		
PartTolerance:	0,00000001	
Color:143.149.175		
SCRootPartComponent		

TABLE 6
Model (B4) > Materials

Object Name	<i>Materials</i>
State	Fully Defined
Statistics	
Materials	3
Material Assignments	0

Coordinate Systems

TABLE 7
Model (B4) > Coordinate Systems > Coordinate System

Object Name	<i>Global Coordinate System</i>
State	Fully Defined
Definition	
Type	Cartesian
Coordinate System ID	0,
Origin	
Origin X	0, mm
Origin Y	0, mm
Origin Z	0, mm
Directional Vectors	
X Axis Data	[1, 0, 0,]
Y Axis Data	[0, 1, 0,]
Z Axis Data	[0, 0, 1,]
Transfer Properties	
Source	
Read Only	No

Connections

TABLE 8
Model (B4) > Connections

Object Name	<i>Connections</i>
State	Fully Defined
Auto Detection	
Generate Automatic Connection On Refresh	Yes
Transparency	
Enabled	Yes
Statistics	
Contacts	1
Active Contacts	1

Joints	0
Active Joints	0
Beams	0
Active Beams	0
Bearings	0
Active Bearings	0
Springs	0
Active Springs	0
Body Interactions	0
Active Body Interactions	0

TABLE 9
Model (B4) > Connections > Contacts

Object Name	<i>Contacts</i>
State	Fully Defined
Definition	
Connection Type	Contact
Scope	
Scoping Method	Geometry Selection
Geometry	All Bodies
Auto Detection	
Tolerance Type	Slider
Tolerance Slider	0,
Tolerance Value	0,71829 mm
Use Range	No
Face/Face	Yes
Face-Face Angle Tolerance	75, °
Face Overlap Tolerance	Off
Cylindrical Faces	Include
Face/Edge	No
Edge/Edge	No
Priority	Include All
Group By	Bodies
Search Across	Bodies
Statistics	
Connections	1
Active Connections	1

TABLE 10
Model (B4) > Connections > Contacts > Contact Regions

Object Name	<i>Frictional - SYS-1\Твердое тело To Втулка\Solid</i>
State	Fully Defined
Scope	
Scoping Method	Geometry Selection
Contact	2 Faces
Target	1 Face
Contact Bodies	SYS-1\Твердое тело
Target Bodies	Втулка\Solid
Protected	No
Definition	
Type	Frictional
Friction Coefficient	0,2
Scope Mode	Manual
Behavior	Asymmetric
Trim Contact	Off
Contact APDL Name	

Target APDL Name	
Suppressed	No
Display	
Element Normals	No
Advanced	
Formulation	Program Controlled
Small Sliding	Program Controlled
Detection Method	Program Controlled
Penetration Tolerance	Program Controlled
Elastic Slip Tolerance	Program Controlled
Normal Stiffness	Program Controlled
Update Stiffness	Program Controlled
Stabilization Damping Factor	0,
Pinball Region	Program Controlled
Time Step Controls	None
Geometric Modification	
Interface Treatment	Add Offset, Ramped Effects
Offset	0, mm
Contact Geometry Correction	None
Target Geometry Correction	None

Mesh

TABLE 11
Model (B4) > Mesh

Object Name	<i>Mesh</i>
State	Solved
Display	
Display Style	Use Geometry Setting
Defaults	
Physics Preference	Mechanical
Element Order	Program Controlled
Element Size	3,615 mm
Sizing	
Use Adaptive Sizing	Yes
Resolution	Default (2)
Mesh Defeaturing	Yes
Defeature Size	Default
Transition	Fast
Span Angle Center	Coarse
Initial Size Seed	Assembly
Bounding Box Diagonal	287,32 mm
Average Surface Area	833,96 mm ²
Minimum Edge Length	2,3673e-004 mm
Quality	
Check Mesh Quality	Yes, Errors
Error Limits	Aggressive Mechanical
Target Element Quality	Default (5,e-002)
Smoothing	Medium
Mesh Metric	None
Inflation	
Use Automatic Inflation	None
Inflation Option	Smooth Transition
Transition Ratio	0,272
Maximum Layers	5
Growth Rate	1,2

Inflation Algorithm	Pre
Inflation Element Type	Wedges
View Advanced Options	No
Advanced	
Number of CPUs for Parallel Part Meshing	Program Controlled
Straight Sided Elements	No
Rigid Body Behavior	Dimensionally Reduced
Triangle Surface Mesher	Program Controlled
Topology Checking	Yes
Pinch Tolerance	Please Define
Generate Pinch on Refresh	No
Auto-Map Fillets	No
Automatic Methods	
Sheet Body Method	Prime Quad Dominant
Sweepable Body Method	Sweep
Statistics	
Nodes	127233
Elements	70153
Show Detailed Statistics	No

TABLE 12
Model (B4) > Mesh > Mesh Controls

Object Name	<i>Face Sizing</i>
State	Fully Defined
Scope	
Scoping Method	Geometry Selection
Geometry	60 Faces
Definition	
Suppressed	No
Type	Element Size
Element Size	2,52 mm
Advanced	
Defeature Size	Default
Influence Volume	No
Behavior	Soft

Static Structural (B5)

TABLE 13
Model (B4) > Analysis

Object Name	<i>Static Structural (B5)</i>
State	Solved
Definition	
Physics Type	Structural
Analysis Type	Static Structural
Solver Target	Mechanical APDL
Options	
Environment Temperature	22, °C
Generate Input Only	No

TABLE 14
Model (B4) > Static Structural (B5) > Analysis Settings

Object Name	<i>Analysis Settings</i>
State	Fully Defined
Step Controls	
Number Of Steps	1,

Current Step Number	1,
Step End Time	1, s
Auto Time Stepping	On
Define By	Substeps
Initial Substeps	20,
Minimum Substeps	10,
Maximum Substeps	200,
Solver Controls	
Solver Type	Program Controlled
Weak Springs	Program Controlled
Solver Pivot Checking	Program Controlled
Large Deflection	On
Inertia Relief	Off
Quasi-Static Solution	On
Rotordynamics Controls	
Coriolis Effect	Off
Restart Controls	
Generate Restart Points	Program Controlled
Retain Files After Full Solve	No
Combine Restart Files	Program Controlled
Nonlinear Controls	
Newton-Raphson Option	Program Controlled
Force Convergence	Program Controlled
Moment Convergence	Program Controlled
Displacement Convergence	Program Controlled
Rotation Convergence	Program Controlled
Line Search	Program Controlled
Stabilization	Program Controlled
Advanced	
Inverse Option	No
Contact Split (DMP)	Program Controlled
Output Controls	
Output Selection	None
Stress	Yes
Back Stress	No
Strain	Yes
Contact Data	Yes
Nonlinear Data	No
Nodal Forces	No
Volume and Energy	Yes
Euler Angles	Yes
General Miscellaneous	No
Contact Miscellaneous	No
Store Results At	All Time Points
Result File Compression	Program Controlled
Analysis Data Management	
Solver Files Directory	C:\Users\User\Desktop\Прочностные характеристики\All_work_files\dp0\SYS-1\MECH\
Future Analysis	None
Scratch Solver Files Directory	
Save MAPDL db	No
Contact Summary	Program Controlled
Delete Unneeded Files	Yes
Nonlinear Solution	Yes

Solver Units	Active System
Solver Unit System	mm

TABLE 15
Model (B4) > Static Structural (B5) > Rotations

Object Name	<i>Rotational Velocity</i>
State	Fully Defined
Scope	
Scoping Method	Geometry Selection
Geometry	All Bodies
Definition	
Define By	Components
Coordinate System	Global Coordinate System
X Component	0, rad/s (ramped)
Y Component	0, rad/s (ramped)
Z Component	-315, rad/s (ramped)
X Coordinate	1,0191e-015 mm
Y Coordinate	-0,61961 mm
Z Coordinate	46,5 mm
Suppressed	No

FIGURE 1
Model (B4) > Static Structural (B5) > Rotational Velocity

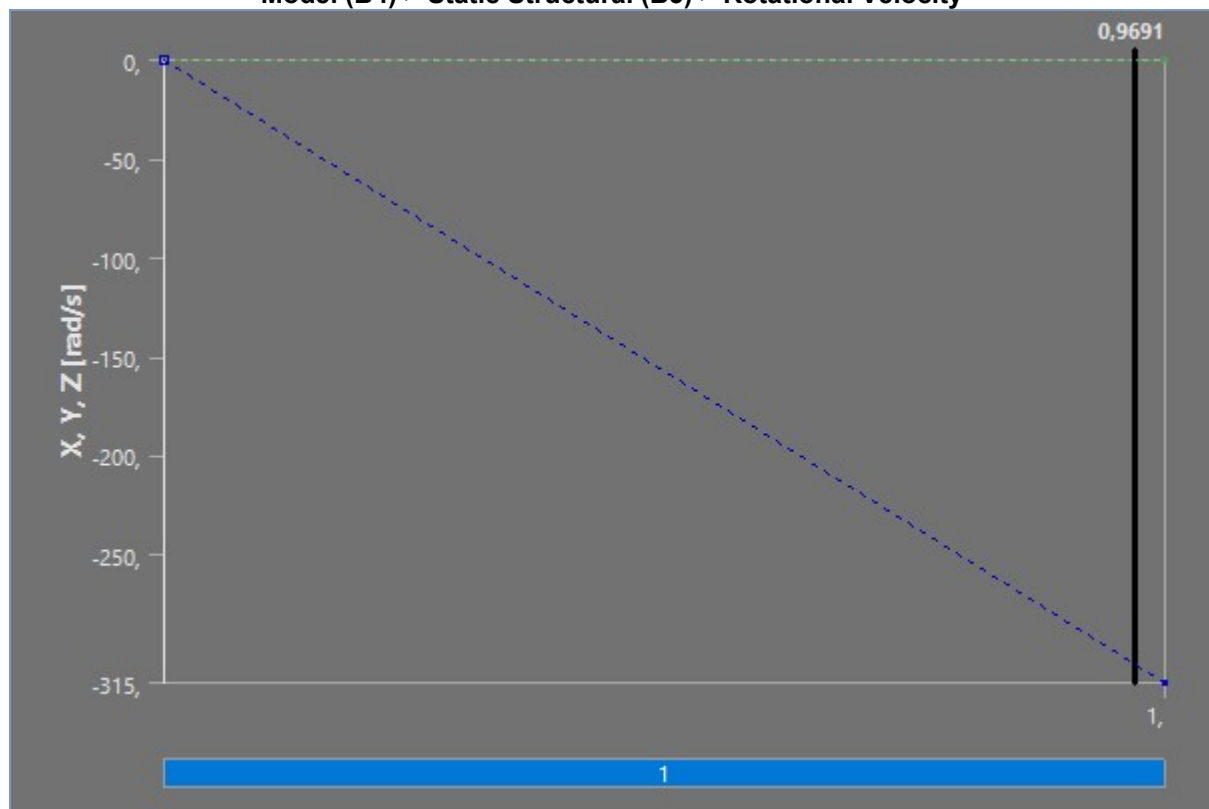


TABLE 16
Model (B4) > Static Structural (B5) > Loads

Object Name	<i>Thermal Condition</i>	<i>Pressure</i>	<i>Cylindrical Support</i>	<i>Remote Displacement</i>
State	Fully Defined		Suppressed	Fully Defined
Scope				
Scoping Method	Geometry Selection			
Geometry	2 Bodies	60 Faces	1 Face	
Coordinate System				Global Coordinate System

X Coordinate				2,7818e-016 mm
Y Coordinate				2,6427e-016 mm
Z Coordinate				21,75 mm
Location				Defined
Definition				
Type	Thermal Condition	Pressure	Cylindrical Support	Remote Displacement
Magnitude	22, °C (ramped)	0,10132 MPa (ramped)		
Suppressed	No		Yes	No
Define By		Normal To		
Applied By		Surface Effect		
Loaded Area		Deformed		
Radial			Fixed	
Axial			Fixed	
Tangential			Fixed	
X Component				0, mm (ramped)
Y Component				0, mm (ramped)
Z Component				0, mm (ramped)
Rotation X				0, ° (ramped)
Rotation Y				0, ° (ramped)
Rotation Z				0, ° (ramped)
Behavior				Deformable
Advanced				
Pinball Region				All

FIGURE 2
Model (B4) > Static Structural (B5) > Thermal Condition

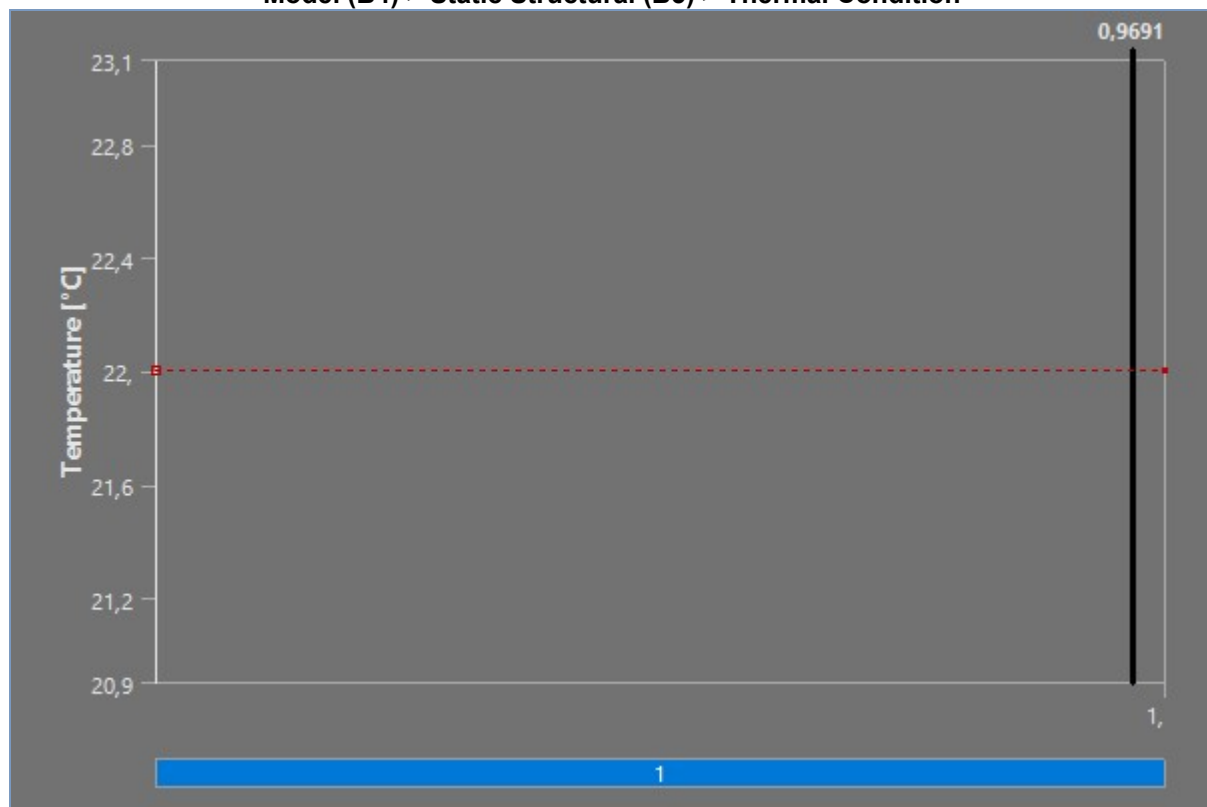


FIGURE 3
Model (B4) > Static Structural (B5) > Pressure


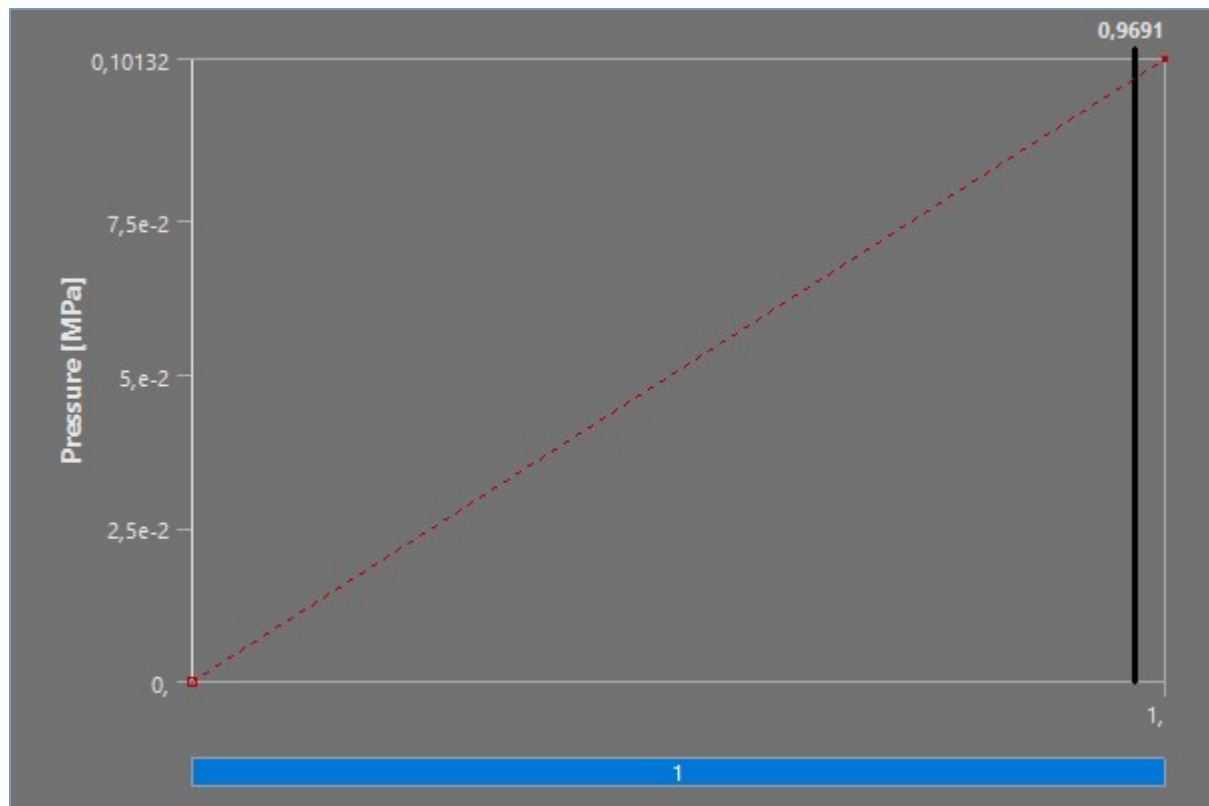


FIGURE 4
Model (B4) > Static Structural (B5) > Remote Displacement

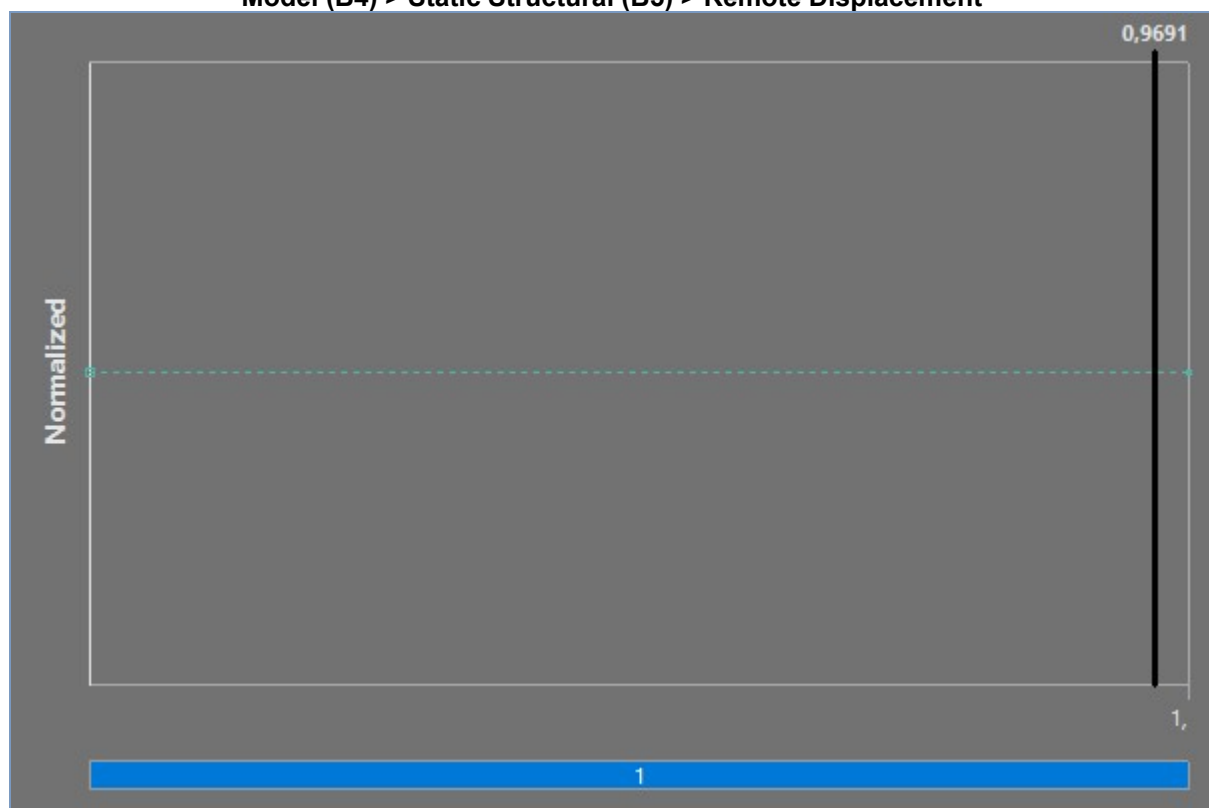

Solution (B6)

TABLE 17
Model (B4) > Static Structural (B5) > Solution

Object Name	<i>Solution (B6)</i>
State	Solved

Adaptive Mesh Refinement	
Max Refinement Loops	1,
Refinement Depth	2,
Information	
Status	Done
MAPDL Elapsed Time	11 m 57 s
MAPDL Memory Used	5,4404 GB
MAPDL Result File Size	461,5 MB
Post Processing	
Beam Section Results	No
On Demand Stress/Strain	No

TABLE 18
Model (B4) > Static Structural (B5) > Solution (B6) > Solution Information

Object Name	<i>Solution Information</i>
State	Solved
Solution Information	
Solution Output	Solver Output
Newton-Raphson Residuals	0
Identify Element Violations	0
Update Interval	2,5 s
Display Points	All
FE Connection Visibility	
Activate Visibility	Yes
Display	All FE Connectors
Draw Connections Attached To	All Nodes
Line Color	Connection Type
Visible on Results	No
Line Thickness	Single
Display Type	Lines

TABLE 19
Model (B4) > Static Structural (B5) > Solution (B6) > Results

Model (27)		Static Structural (28)		Solution (29)		Results	
Object Name		Total Deformation		Equivalent Stress		Equivalent Stress 2	
State		Solved					
Scope							
Scoping Method		Geometry Selection					
Geometry		All Bodies				148 Faces	
Definition							
Type		Total Deformation		Equivalent (von-Mises) Stress			
By		Time					
Display Time		Last					
Separate Data by Entity		No					
Calculate Time History		Yes					
Identifier							
Suppressed		No					
Results							
Minimum		8,3535e-006 mm		1,8623e-003 MPa			
Maximum		2,8294e-002 mm		39,295 MPa		4,9873 MPa	
Average		2,0327e-002 mm		0,76225 MPa		0,46475 MPa	
Minimum Occurs On		Втулка\Solid		SYS-1\Твердое тело			
Maximum Occurs On		SYS-1\Твердое тело		Втулка\Solid		SYS-1\Твердое тело	
Minimum Value Over Time							
Minimum		1,0707e-006 mm		7,8788e-005 MPa			
Maximum		3,2091e-005 mm		1,8623e-003 MPa			
Maximum Value Over Time							

Minimum	1,469e-003 mm	2,3274 MPa	0,25458 MPa
Maximum	2,8294e-002 mm	39,295 MPa	4,9873 MPa
Information			
Time	1, s		
Load Step	1		
Substep	12		
Iteration Number	25		
Integration Point Results			
Display Option		Averaged	
Average Across Bodies		No	

FIGURE 5
Model (B4) > Static Structural (B5) > Solution (B6) > Total Deformation

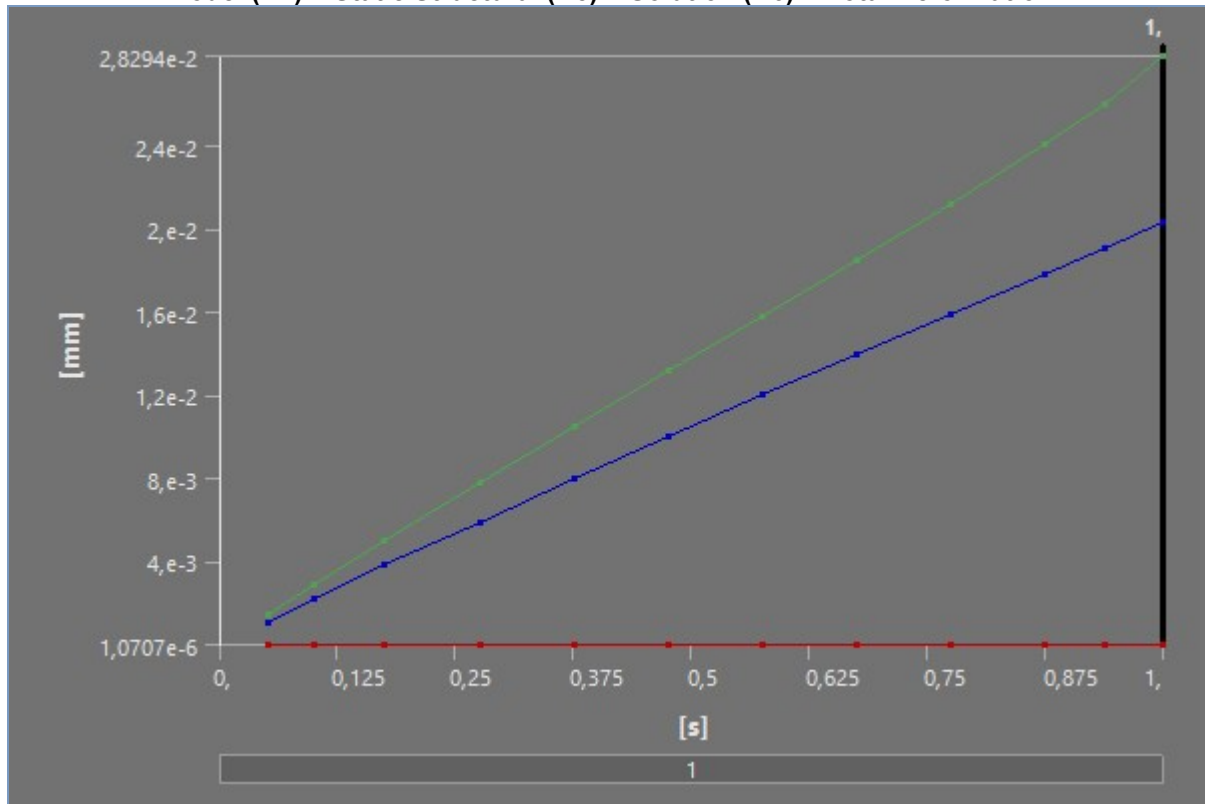


TABLE 20
Model (B4) > Static Structural (B5) > Solution (B6) > Total Deformation

Time [s]	Minimum [mm]	Maximum [mm]	Average [mm]
5,e-002	1,0707e-006	1,469e-003	1,0997e-003
0,1	3,3619e-006	2,9138e-003	2,1889e-003
0,175	6,8908e-006	5,0325e-003	3,8099e-003
0,275	1,1479e-005	7,7791e-003	5,9182e-003
0,375	1,6851e-005	1,0486e-002	7,9898e-003
0,475	2,2356e-005	1,315e-002	1,0018e-002
0,575	2,7312e-005	1,5794e-002	1,2006e-002
0,675	3,0931e-005	1,844e-002	1,3958e-002
0,775	3,2091e-005	2,1132e-002	1,5886e-002
0,875	2,8663e-005	2,4052e-002	1,7811e-002
0,9375	2,6014e-005	2,5982e-002	1,9007e-002
1,	8,3535e-006	2,8294e-002	2,0327e-002

FIGURE 6
Model (B4) > Static Structural (B5) > Solution (B6) > Equivalent Stress

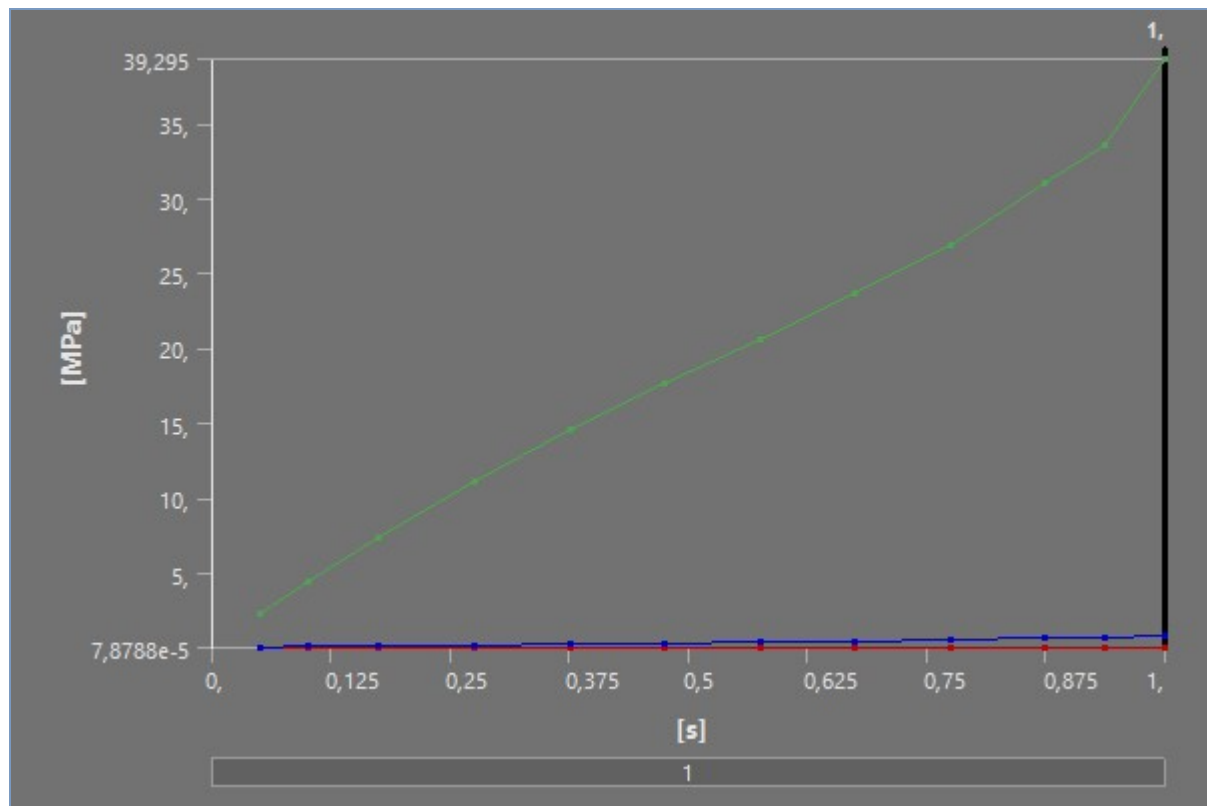


TABLE 21
Model (B4) > Static Structural (B5) > Solution (B6) > Equivalent Stress

Time [s]	Minimum [MPa]	Maximum [MPa]	Average [MPa]
5,e-002	7,8788e-005	2,3274	3,6153e-002
0,1	1,5849e-004	4,3944	6,9296e-002
0,175	2,5413e-004	7,3688	0,11846
0,275	3,4877e-004	11,132	0,18359
0,375	4,3608e-004	14,513	0,24636
0,475	5,2916e-004	17,625	0,30853
0,575	7,2954e-004	20,603	0,37201
0,675	9,811e-004	23,614	0,43919
0,775	8,7457e-004	26,908	0,51355
0,875	1,2404e-003	30,948	0,60154
0,9375	1,5947e-003	33,536	0,65902
1,	1,8623e-003	39,295	0,76225

FIGURE 7
Model (B4) > Static Structural (B5) > Solution (B6) > Equivalent Stress 2

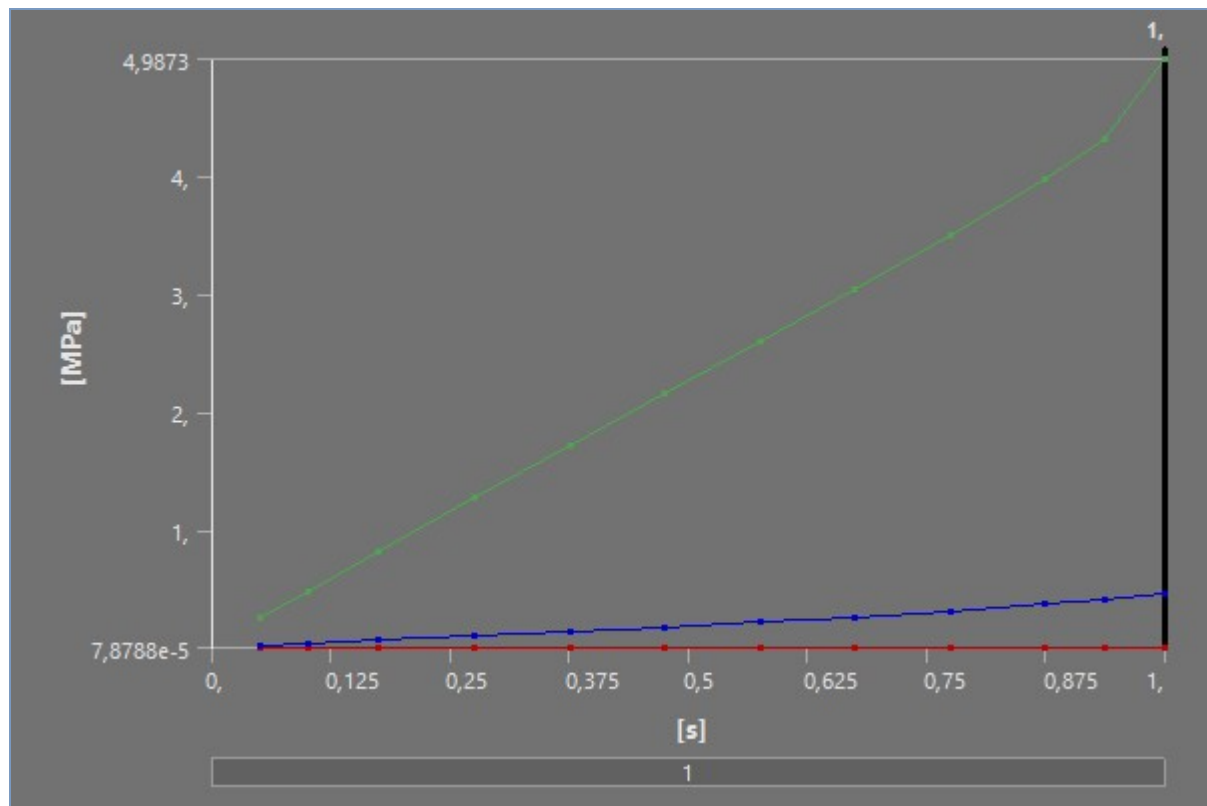


TABLE 22

Model (B4) > Static Structural (B5) > Solution (B6) > Equivalent Stress 2

Time [s]	Minimum [MPa]	Maximum [MPa]	Average [MPa]
5,e-002	7,8788e-005	0,25458	1,8493e-002
0,1	1,5849e-004	0,4794	3,5984e-002
0,175	2,5413e-004	0,81825	6,2564e-002
0,275	3,4877e-004	1,2653	9,9136e-002
0,375	4,3608e-004	1,7133	0,13637
0,475	5,2916e-004	2,1548	0,17516
0,575	7,2954e-004	2,5935	0,21644
0,675	9,811e-004	3,0356	0,26126
0,775	8,7457e-004	3,4908	0,31112
0,875	1,2404e-003	3,9767	0,36874
0,9375	1,5947e-003	4,3088	0,40686
1,	1,8623e-003	4,9873	0,46475

TABLE 23

Model (B4) > Static Structural (B5) > Solution (B6) > Stress Safety Tools

Object Name	<i>Stress Tool</i>
State	Solved
Definition	
Theory	Max Equivalent Stress
Stress Limit Type	Tensile Yield Per Material

TABLE 24

Model (B4) > Static Structural (B5) > Solution (B6) > Stress Tool > Results

Object Name	<i>Safety Factor</i>
State	Solved
Scope	
Scoping Method	Geometry Selection
Geometry	All Bodies
Definition	

Type	Safety Factor
By	Time
Display Time	Last
Separate Data by Entity	No
Calculate Time History	Yes
Identifier	
Suppressed	No
Integration Point Results	
Display Option	Averaged
Average Across Bodies	No
Results	
Minimum	6,3621
Minimum Occurs On	Втулка\Solid
Minimum Value Over Time	
Minimum	6,3621
Maximum	15,
Maximum Value Over Time	
Minimum	15,
Maximum	15,
Information	
Time	1, s
Load Step	1
Substep	12
Iteration Number	25

FIGURE 8
Model (B4) > Static Structural (B5) > Solution (B6) > Stress Tool > Safety Factor

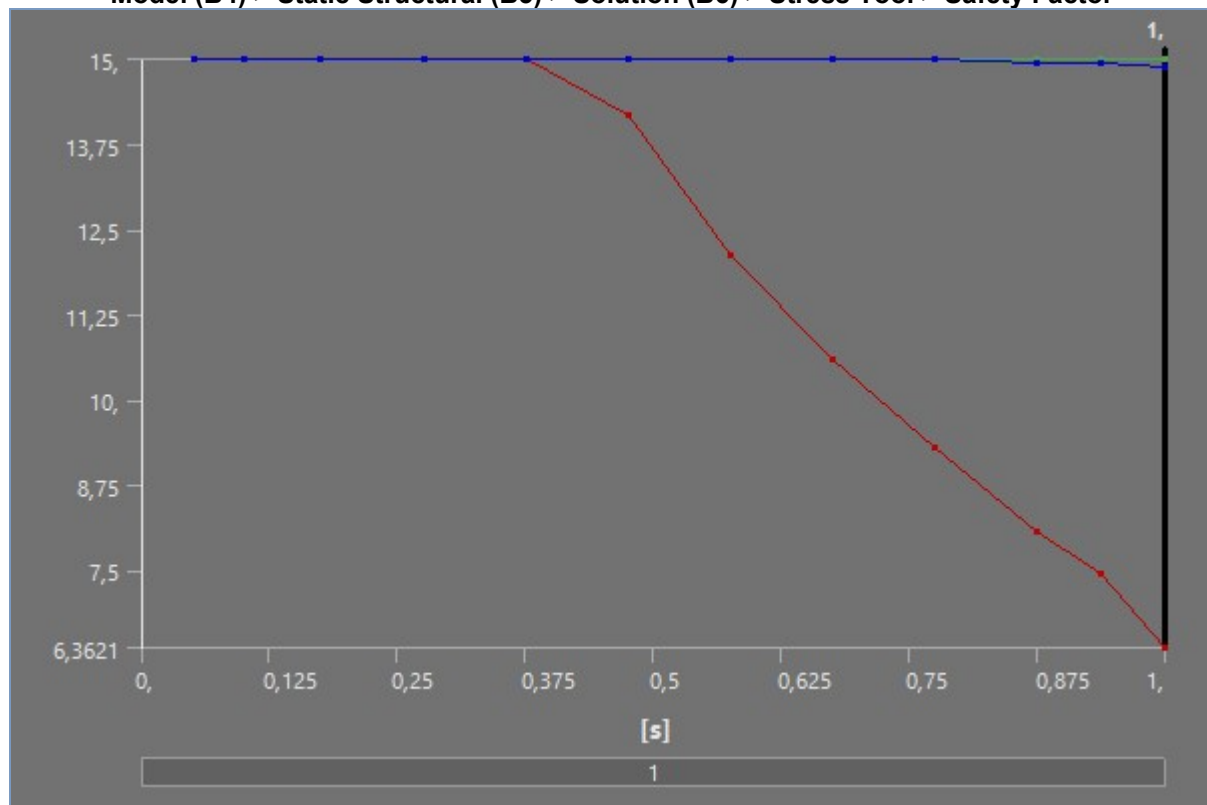


TABLE 25
Model (B4) > Static Structural (B5) > Solution (B6) > Stress Tool > Safety Factor

Time [s]	Minimum	Maximum	Average
5,e-002			
0,1			

0,175	15,	15,	15,
0,275			
0,375			
0,475	14,184		
0,575	12,134		
0,675	10,587		14,999
0,775	9,2911		14,988
0,875	8,0779		14,955
0,9375	7,4547		14,93
1,	6,3621		14,882

TABLE 26**Model (B4) > Static Structural (B5) > Solution (B6) > Stress Safety Tools**

Object Name	<i>Stress Tool 2</i>
State	Solved
Definition	
Theory	Max Equivalent Stress
Stress Limit Type	Tensile Yield Per Material

TABLE 27**Model (B4) > Static Structural (B5) > Solution (B6) > Stress Tool 2 > Results**

Object Name	<i>Safety Factor</i>
State	Solved
Scope	
Scoping Method	Geometry Selection
Geometry	148 Faces
Definition	
Type	Safety Factor
By	Time
Display Time	Last
Separate Data by Entity	No
Calculate Time History	Yes
Identifier	
Suppressed	No
Integration Point Results	
Display Option	Averaged
Average Across Bodies	No
Results	
Minimum	9,0229
Minimum Occurs On	SYS-1\Твердое тело
Minimum Value Over Time	
Minimum	9,0229
Maximum	15,
Maximum Value Over Time	
Minimum	15,
Maximum	15,
Information	
Time	1, s
Load Step	1
Substep	12
Iteration Number	25

FIGURE 9**Model (B4) > Static Structural (B5) > Solution (B6) > Stress Tool 2 > Safety Factor**

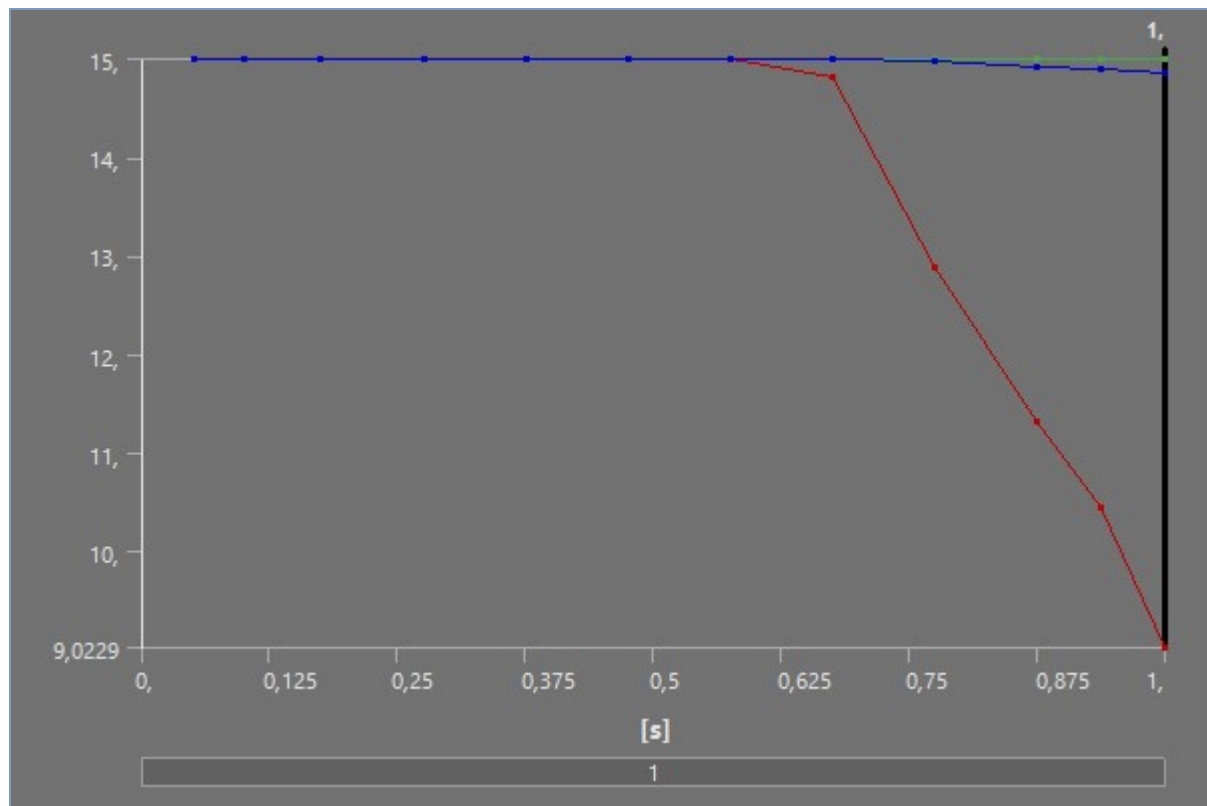


TABLE 28
Model (B4) > Static Structural (B5) > Solution (B6) > Stress Tool 2 > Safety Factor

Time [s]	Minimum	Maximum	Average
5,e-002	15,	15,	15,
0,1			
0,175			
0,275			
0,375			
0,475			
0,575			
0,675	14,824		
0,775	12,891	14,978	14,978
0,875	11,316		14,925
0,9375	10,444		14,897
1,	9,0229		14,853

Material Data

Structural Steel

TABLE 29
Structural Steel > Constants

Density	7,85e-006 kg mm ⁻³
Coefficient of Thermal Expansion	1,2e-005 K ⁻¹
Specific Heat	4,34e+005 mJ kg ⁻¹ K ⁻¹
Thermal Conductivity	6,05e-002 W mm ⁻¹ K ⁻¹
Resistivity	1,7e-004 ohm mm

TABLE 30
Structural Steel > Color

Red	Green	Blue

132,	139,	179,
------	------	------

TABLE 31
Structural Steel > Compressive Ultimate Strength

Compressive Ultimate Strength MPa
0,

TABLE 32
Structural Steel > Compressive Yield Strength

Compressive Yield Strength MPa
250,

TABLE 33
Structural Steel > Tensile Yield Strength

Tensile Yield Strength MPa
250,

TABLE 34
Structural Steel > Tensile Ultimate Strength

Tensile Ultimate Strength MPa
460,

TABLE 35
Structural Steel > Isotropic Secant Coefficient of Thermal Expansion

Zero-Thermal-Strain Reference Temperature K
295,15

TABLE 36
Structural Steel > S-N Curve

Alternating Stress MPa	Cycles	Mean Stress MPa
3999,	10,	0,
2827,	20,	0,
1896,	50,	0,
1413,	100,	0,
1069,	200,	0,
441,	2000,	0,
262,	10000	0,
214,	20000	0,
138,	1,e+005	0,
114,	2,e+005	0,
86,2	1,e+006	0,

TABLE 37
Structural Steel > Strain-Life Parameters

Strength Coefficient MPa	Strength Exponent	Ductility Coefficient	Ductility Exponent	Cyclic Strength Coefficient MPa	Cyclic Strain Hardening Exponent
920,	-0,106	0,213	-0,47	1000,	0,2

TABLE 38
Structural Steel > Isotropic Elasticity

Young's Modulus MPa	Poisson's Ratio	Bulk Modulus MPa	Shear Modulus MPa	Temperature K
2,e+005	0,3	1,6667e+005	76923	

TABLE 39
Structural Steel > Isotropic Relative Permeability

Relative Permeability
10000

PA12-CF10

TABLE 40
PA12-CF10 > Constants

Density	1,04e-006 kg mm ⁻³
Coefficient of Thermal Expansion	7,e-005 K ⁻¹

TABLE 41
PA12-CF10 > Color

Red	Green	Blue
235,	222,	222,

TABLE 42
PA12-CF10 > Isotropic Elasticity

Young's Modulus MPa	Poisson's Ratio	Bulk Modulus MPa	Shear Modulus MPa	Temperature K
3500,	0,38	4861,1	1268,1	

TABLE 43
PA12-CF10 > Tensile Yield Strength

Tensile Yield Strength MPa
45,

TABLE 44
PA12-CF10 > Compressive Ultimate Strength

Compressive Ultimate Strength MPa
90,