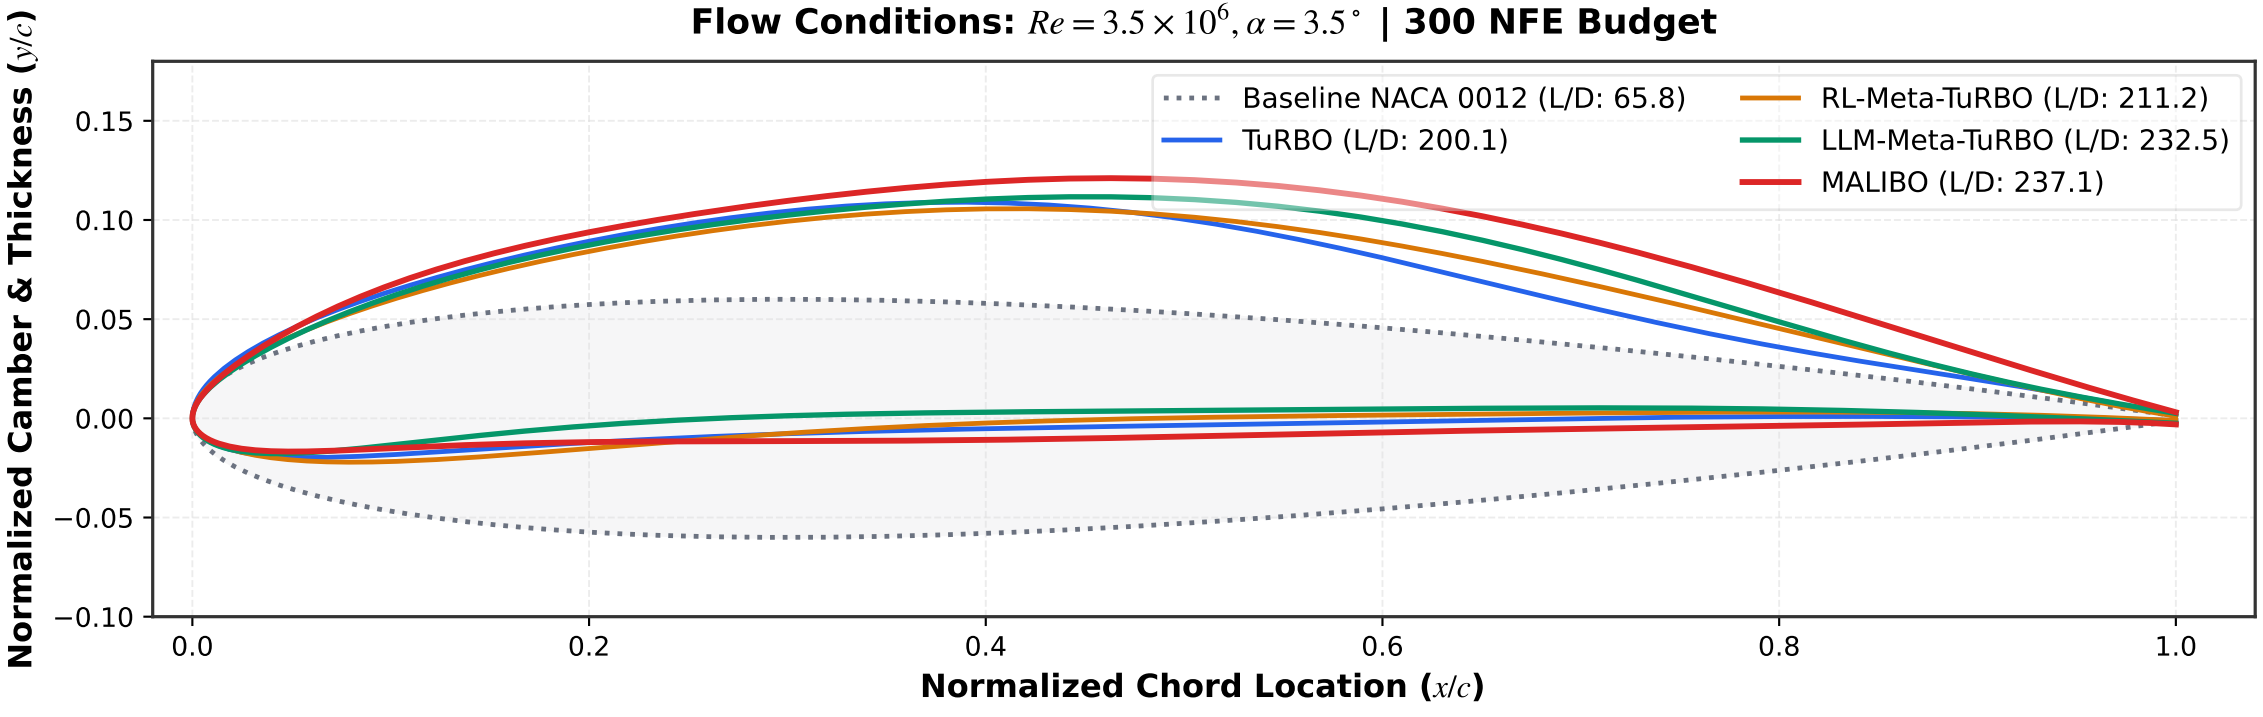
Optimized Airfoil Geometry Profiles Comparison (Representative Median Runs)
Flow Conditions: $Re = 3.5 \times 10^6, \alpha = 3.5^\circ$ | 300 NFE Budget
Baseline NACA 0012 (L/D: 65.8)
TuRBO (L/D: 200.1)
RL-Meta-TuRBO (L/D: 211.2)
LLM-Meta-TuRBO (L/D: 232.5)
MALIBO (L/D: 237.1)
Normalized Camber & Thickness (y/c)
Normalized Chord Location (x/c)
0.15
0.10
0.05
0.00
−0.05
−0.10
0.0
0.2
0.4
0.6
0.8
1.0