



User Button

V1.3 Added user button KEY




Reset Circuit





BOOT Settings

V1.2 BOOT jumper changed to BOOT0 button; BOOT1 10K pull-down




RTC Power

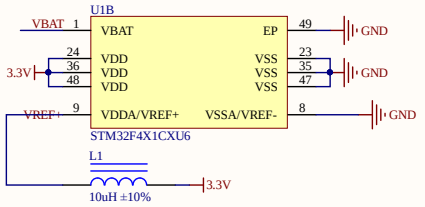





STM32 Power Section

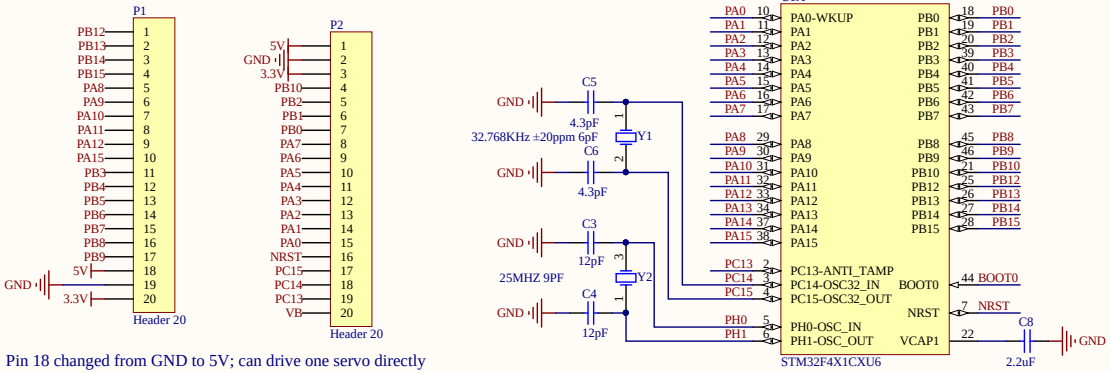

V1.1 Pin 18 changed from GND to 5V; can drive one servo directly




Indicator LEDs

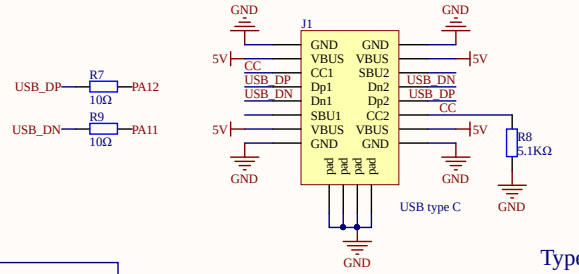


Type-C Port

FLASH (buy and solder it yourself)

V2.0 MISO pin moved from PA6 to PB4 so STM32F411 users can connect a TF card and FLASH at the same time



SW Debug/Download Port

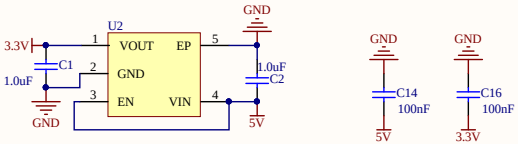

5V -> 3.3V Power Conversion

WeAct

Title	MiniF4 Bottom marked V2.0	
Size A3	Number	Revision V2.0
Date: 2019/11/22/Fri		Sheet of
File: E:\AD\..\MiniF4x1Cx.SchDoc		Drawn By: zhuyix