
SKYWORTH
Make Every Ray of Sunshine Count

High Efficiency Series-66

620-640W

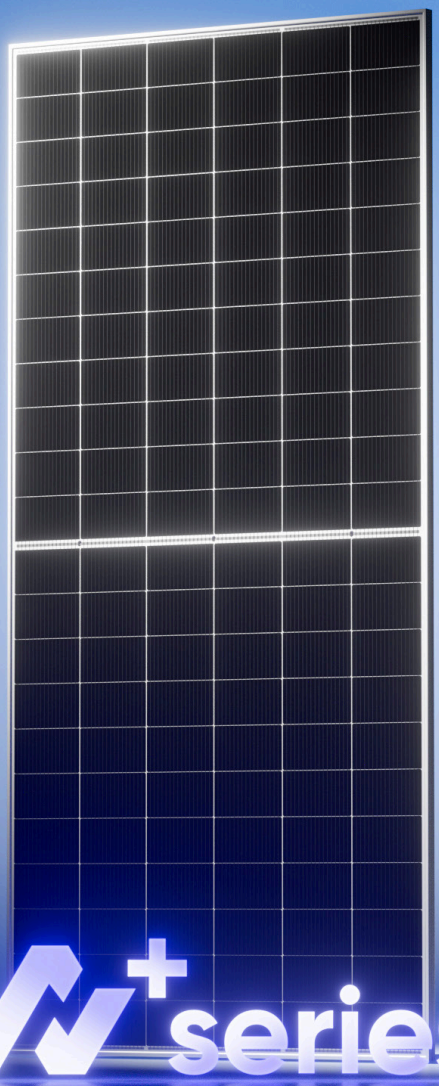

N+ series

Highly Anti PID
linear power warranty with first year ≤1% degradation and an annual degradation rate of up to 0.4% after that

Better low irradiance response
Superior power generation under shading conditions

Highly reliable
15-year product warranty,30-year linear power output warranty

Improvement in power generation performance
Conversion efficiency up to **23.7%**

Bifacial Energy Yield | N-type Silicon Wafer
Bifacial rate of up to 80%, module additional power generation of up to 10% over regular modules

QUALITY SYSTEM


IEC 61215(2021), IEC 61730(2018)
ISO 9001:2015: Quality management systems
ISO 14001:2015: Environmental management systems
ISO 45001:2018: Occupational health and safety management systems

All Rights Reserved @Shenzhen Skyworth Photovoltaic Technology Co., LTD. Please refer to the latest version for any updates

Electrical Characteristics

Module Type	QM210 THCD-620-66	QM210 THCD-625-66	QM210 THCD-630-66	QM210 THCD-635-66	QM210 THCD-640-66
	STC	STC	STC	STC	STC
Maximum Power[W]	620	625	630	635	640
Maximum Power Voltage[V]	41.40	41.70	42.00	42.30	42.60
Maximum Power Current[A]	14.99	15.00	15.01	15.02	15.03
Open circuit voltage[V]	49.60	49.90	50.20	50.50	50.80
Short Circuit Current[A]	15.91	15.92	15.93	15.94	15.95
Module Efficiency	**23.0%**	**23.2%**	**23.4%**	**23.6%**	**23.7%**
Operating Temperature	-40℃~+85℃				
Maximum System Voltage	DC 1500V				
Maximum Series Fuse Rating	25A/30A				
Power Tolerance[W]	0~+5W				
Voc Temperature Coefficient	-0.28%/℃				
Pmax Temperature Coefficient	-0.29%/℃				
Isc Temperature Coefficient	0.04%/℃				
Nominal Opearting Cell Temperature	45±2℃				


Technical drawing

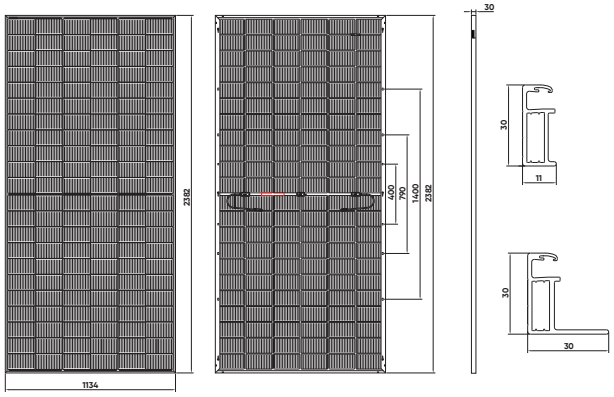


Mechanical Specifications


Solar Cells	132(66×2)
Dimension	2382×1134×30mm
Weight	32.5kg
Front Glass	2.0mm AR coated heat strengthened-Glass
Back Glass	2.0mm heat strengthened-Glass
Frame	Anodized aluminium alloy
Junction Box	IP68 / 3 diodes
Output Cables	4mm²(IEC),+300mm/-200mm or customized
Bifaciality	80%+5%

Characteristic

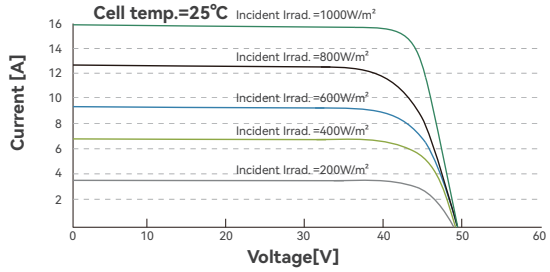

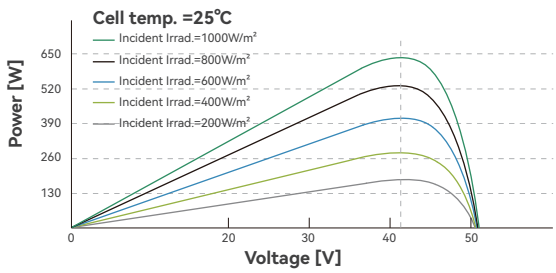

Linear Performace Warranty

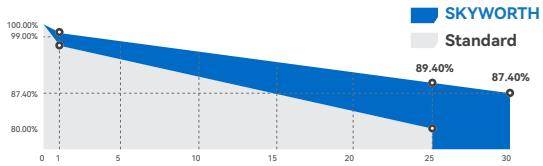

15 YEARS 15-year product warranty
30 YEARS 30-year linear power output warranty
0.4% year 2-30 power degradation

Level

Fire Performance	C
Security Protection	Class II

Packing Configuration

Pallet	36pcs/Pallet
Container	720pcs/40HQ Container

SKYWORTH
Make Every Ray of Sunshine Count

Global-V1.01-2025EN

Tel: 400-063-8989
Email: sales@solavita-ess.com
Web: www.solavita.com / www.skyworth-pv.com
Add: Room No.0801,C Block, 5th Building, HuaQiang Creative Park, Guangming Street, Guangming District, Shenzhen