


```
64 bytes from 192.168.50.102: icmp_seq=2 ttl=128 time=0.791 ms
64 bytes from 192.168.50.102: icmp_seq=3 ttl=128 time=1.46 ms
64 bytes from 192.168.50.102: icmp_seq=4 ttl=128 time=0.728 ms
64 bytes from 192.168.50.102: icmp_seq=5 ttl=128 time=0.827 ms
64 bytes from 192.168.50.102: icmp_seq=6 ttl=128 time=0.692 ms
64 bytes from 192.168.50.102: icmp_seq=7 ttl=128 time=0.595 ms
64 bytes from 192.168.50.102: icmp_seq=8 ttl=128 time=0.802 ms
^C
— 192.168.50.102 ping statistics —
8 packets transmitted, 8 received, 0% packet loss, time 7250ms
rtt min/avg/max/mdev = 0.595/1.262/4.205/1.139 ms
```

```
(kali@kali)-[~]
$ sudo nano /etc/inetsim/inetsim.conf
[sudo] password for kali:
```

```
(kali@kali)-[~]
$ sudo inetsim
INetSim 1.3.2 (2020-05-19) by Matthias Eckert & Thomas Hungenberg
Using log directory: /var/log/inetsim/
Using data directory: /var/lib/inetsim/
Using report directory: /var/log/inetsim/report/
Using configuration file: /etc/inetsim/inetsim.conf
Parsing configuration file.
Configuration file parsed successfully.
== INetSim main process started (PID 61939) ==
Session ID: 61939
Listening on: 127.0.0.1
Real Date/Time: 2023-11-23 08:17:23
Fake Date/Time: 2023-11-23 08:17:23 (Delta: 0 seconds)
Forking services ...
* https_443_tcp - started (PID 61941)
done.
Simulation running.
```


default HTML page for INetSim HTTP server fake mode.

This file is an HTML document.

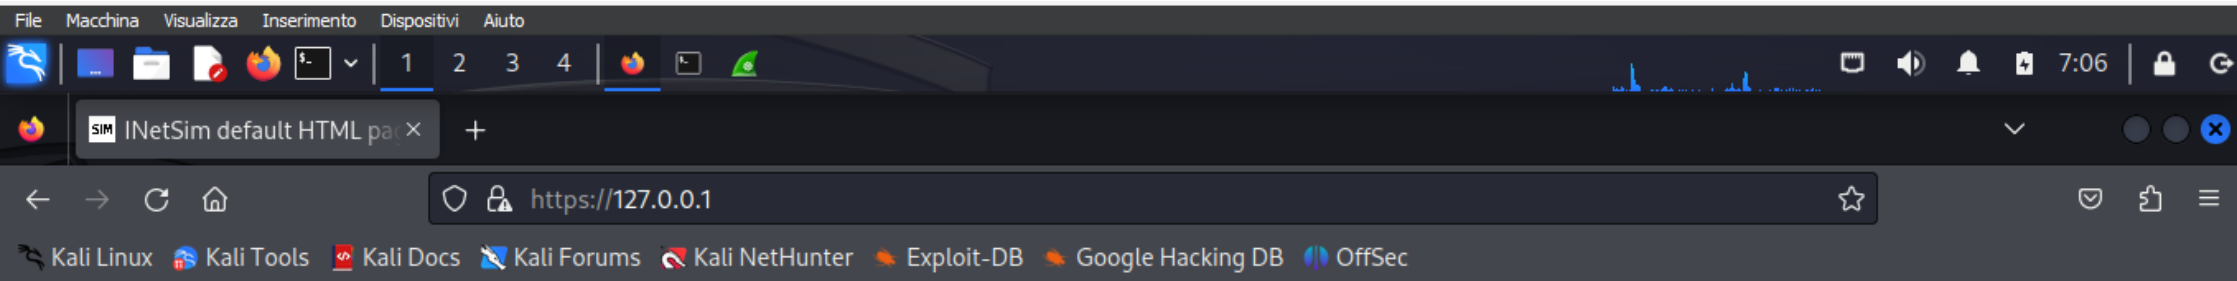

This is the default HTML page for INetSim HTTP server fake mode.

This file is an HTML document.

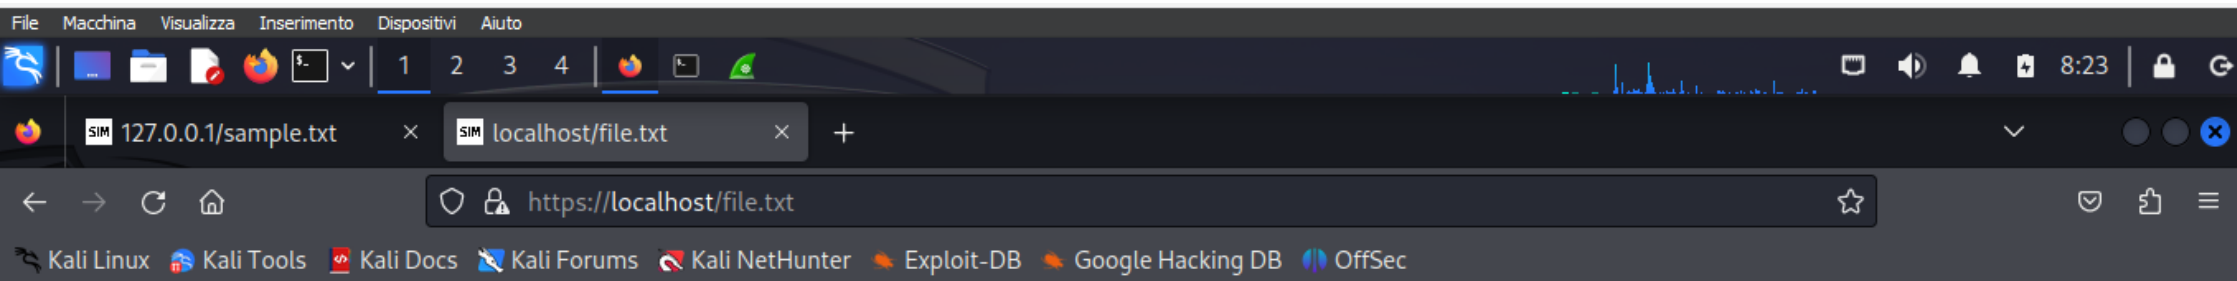

This is the default text document for INetSim HTTP server fake mode.

This file is plain text.



<pre> Frame 195: 66 bytes on wire (528 bits), 66 bytes captured (528 bits) on interface lo, id 0 Ethernet II, Src: 00:00:00_00:00:00 (00:00:00:00:00:00), Dst: 00:00:00_00:00:00 (00:00:00:00:00:00) Internet Protocol Version 4, Src: 127.0.0.1, Dst: 127.0.0.1 Transmission Control Protocol, Src Port: 54752, Dst Port: 443, Seq: 726, Ack: 1932, Len: 0 </pre>	<pre> 0000 00 00 00 00 00 00 00 00 00 00 00 00 08 00 0010 00 34 04 cf 40 00 40 06 37 f3 7f 00 00 01 0020 00 01 d5 e0 01 bb db 65 1a d1 18 ff 48 8b 0030 02 00 fe 28 00 00 01 01 08 0a ff 29 60 8e 0040 4d 18 </pre>
--	---

Profile: Default

Frame 195: 66 bytes on wire (528 bits), 66 bytes captured (528 bits) on interface lo, id 0	0000	00 00 00 00 00 00 00 00	00 00 00 00 08 00
Ethernet II, Src: 00:00:00_00:00:00 (00:00:00:00:00:00), Dst: 00:00:00_00:00:00 (00:00:00:00:00:00)	0010	00 34 04 cf 40 00 40 06	37 f3 7f 00 00 01
Internet Protocol Version 4, Src: 127.0.0.1, Dst: 127.0.0.1	0020	00 01 d5 e0 01 bb db 65	1a d1 18 ff 48 8b
Transmission Control Protocol, Src Port: 54752, Dst Port: 443, Seq: 726, Ack: 1932, Len: 0	0030	02 00 fe 28 00 00 01 01	08 0a ff 29 60 8e
	0040	4d 18	

Profile: Default