



Diagrama de fases de los cilindros

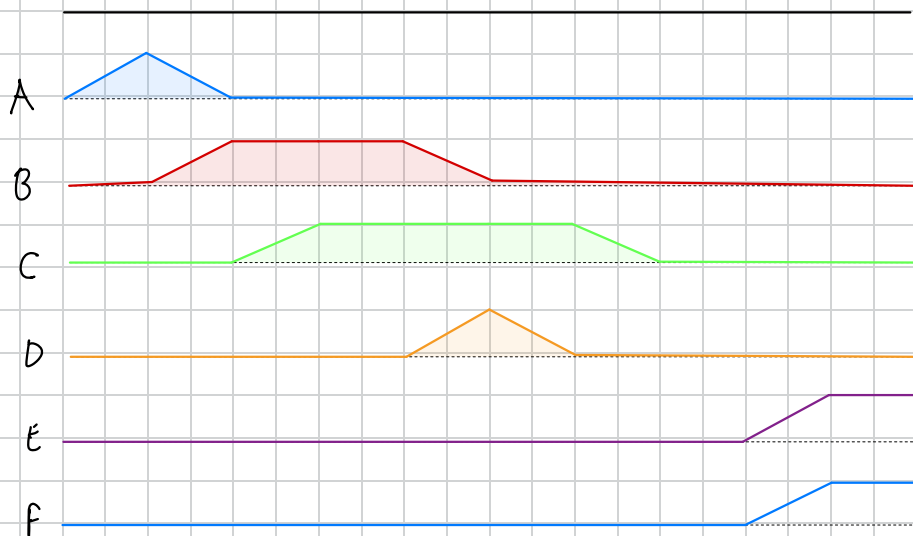

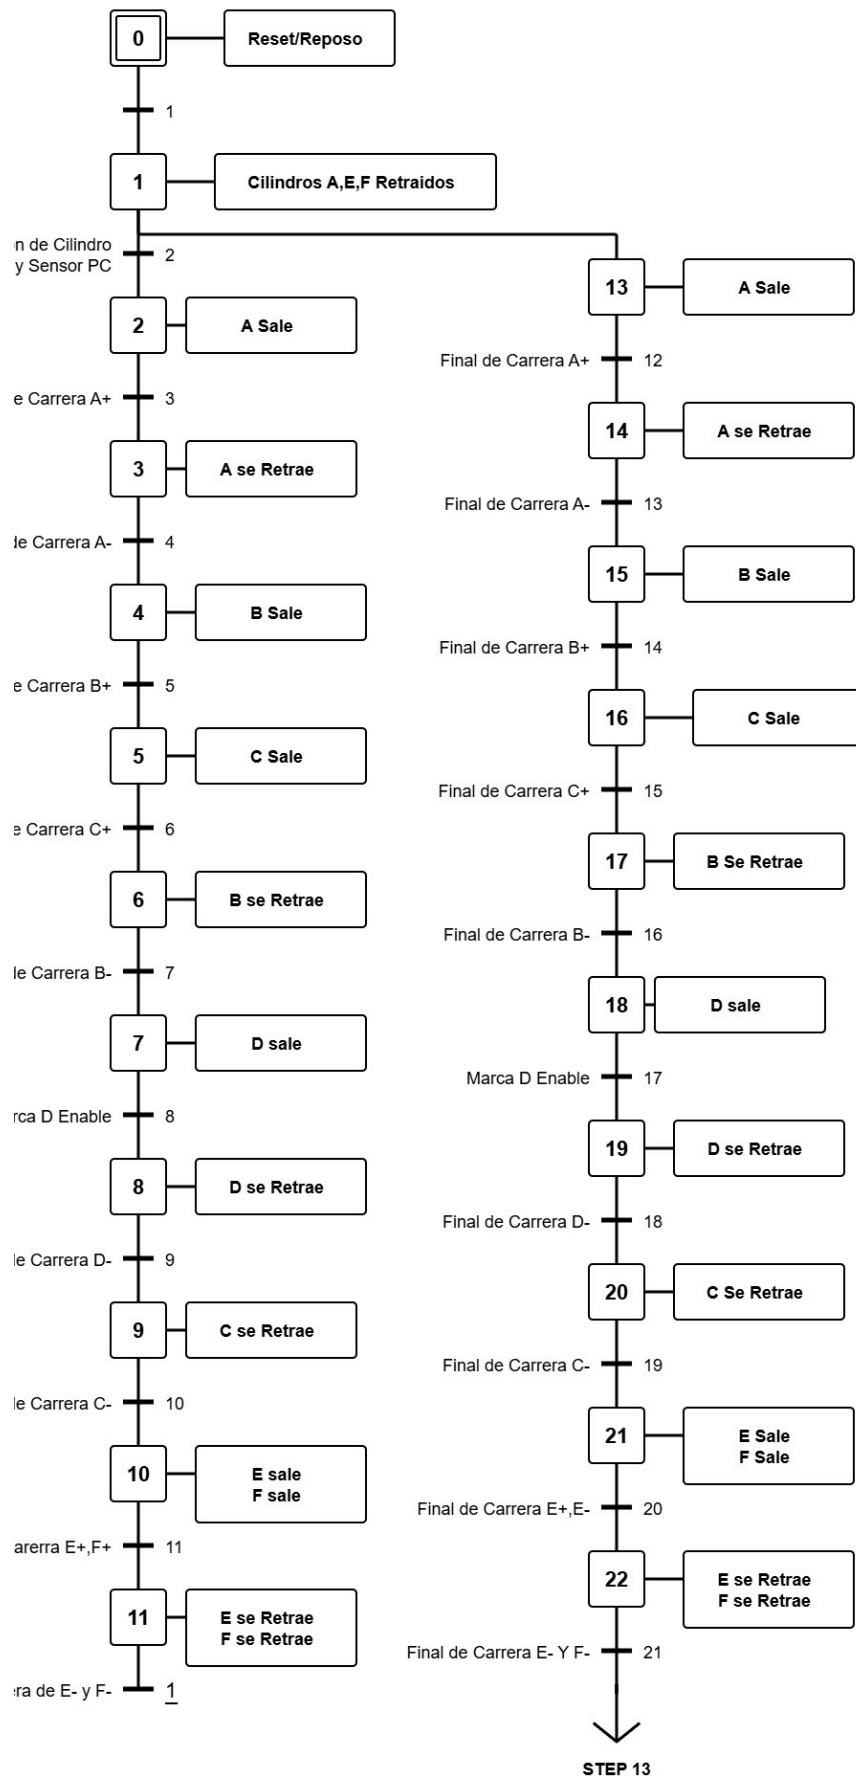

Totally Integrated Automation Portal

AWL [FB2]

AWL Properties

General

Name	AWL	Number	2	Type	FB
Language	STL	Numbering	Automatic		

Information

Title		Author		Comment	
Family		Version	0.1	User-defined ID	

Name	Data type	Default value	Retain
Input			
Output			
InOut			
Static			
Temp			
Constant			

Network 1:

0001

A

"reset"

0002

0003

R

"Cil_A_+"

0004

S

"Cil_A_-"

0005

R

"Cil_E_+"

0006

S

"Cil_E_-"

0007

R

"Cil_F_+"

0008

S

"Cil_F_-"

0009

0010

R

"Cil_B_Out"

0011

R

"Cil_C_Out"

0012

R

"Cil_D_Out"

0013

0014

R

"Alarma_Stock"

0015

R

"Alarma_pc"

0016

S

"ALM_em"

0017

R

"Alarma_pp"

0018

R

"ALM_start"

0019

R


"ALM_stop"

FUB [FB3]


FUB Properties					
General					
Name	FUB	Number	3	Type	FB
Language	FBD	Numbering	Automatic		
Information					
Title		Author		Comment	
Family		Version	0.1	User-defined ID	


Name	Data type	Default value	Retain
Input			
Output			
InOut			
Static			
Temp			
Constant			

Network 1:

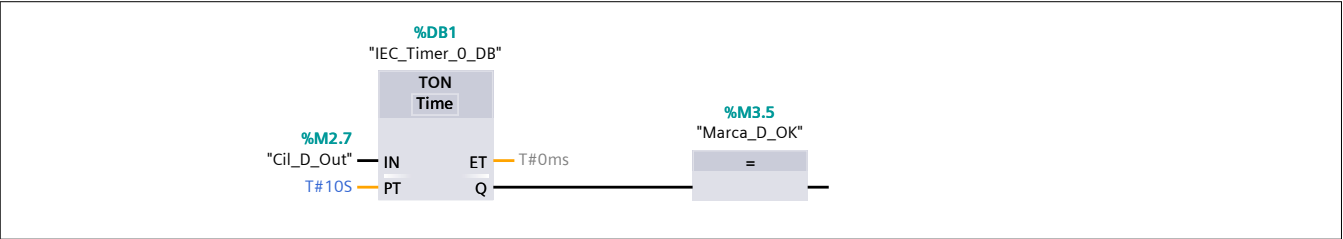

Network 2:

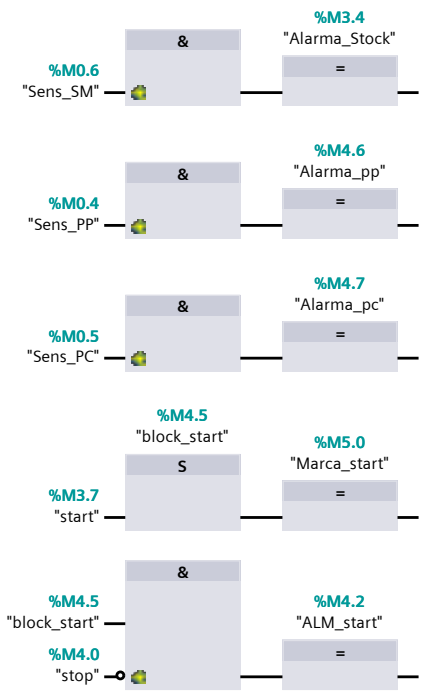

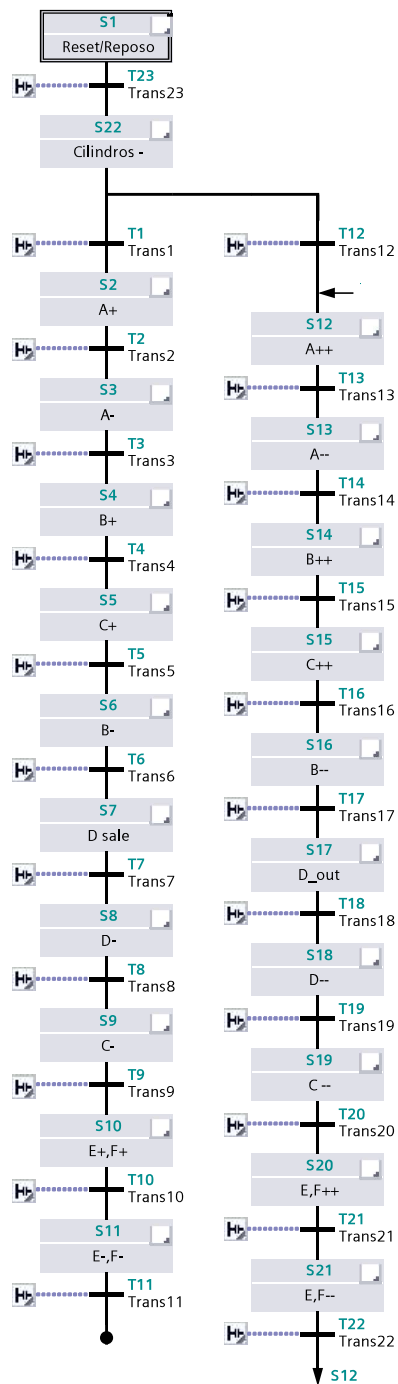

S1 - [Initial step]:Reset/Reposo

Interlock -(c)-:

Interlock alarm	
Alarm text	