

Company: P1001

Name:

Date: 4/28/2026

Pump:

Size: C218-2x1.5x8

Type: C-Series

Synch Speed: 3600 rpm

Curve: C218

Specific Speeds:

Dimensions:

Speed: 3516 rpm

Dia: 7.75 in

Impeller: 95-07059

Ns: ---

Nss: ---

Suction: 2 in

Discharge: 1.5 in

Operating Point:

Flow: 552.67 lpm

Head: 82.4552 m

Fluid:

Water

Density: 0.969893 g/cm³

Viscosity: 0.3412 cP

NPSHa: ---

Temperature: 83 °C

Vapor Pressure: 7.756 psi a

Atm Pressure: 13.03 psi a

Motor:

Size: 30 hp

Speed: 3600 rpm

Frame: 286TS

Pump Limits:

Temperature: 400 °F

Pressure: ---

Sphere Size: ---

Power: ---

Eye Area: ---

---- Duty Point ----

Flow: 553 lpm

Head: 82.5 m

Eff: 56%

Power: 17.2 hp

NPSHr: 2.01 m

---- Design Curve ----

Shutoff Head: 87 m

Shutoff dP: 120 psi

Min Flow: 18.9 lpm

BEP: 62.6% @ 1194 lpm


NOL Power:

27.6 hp @ 1194 lpm

-- Max Curve --

Max Power:

29.6 hp @ 1221 lpm

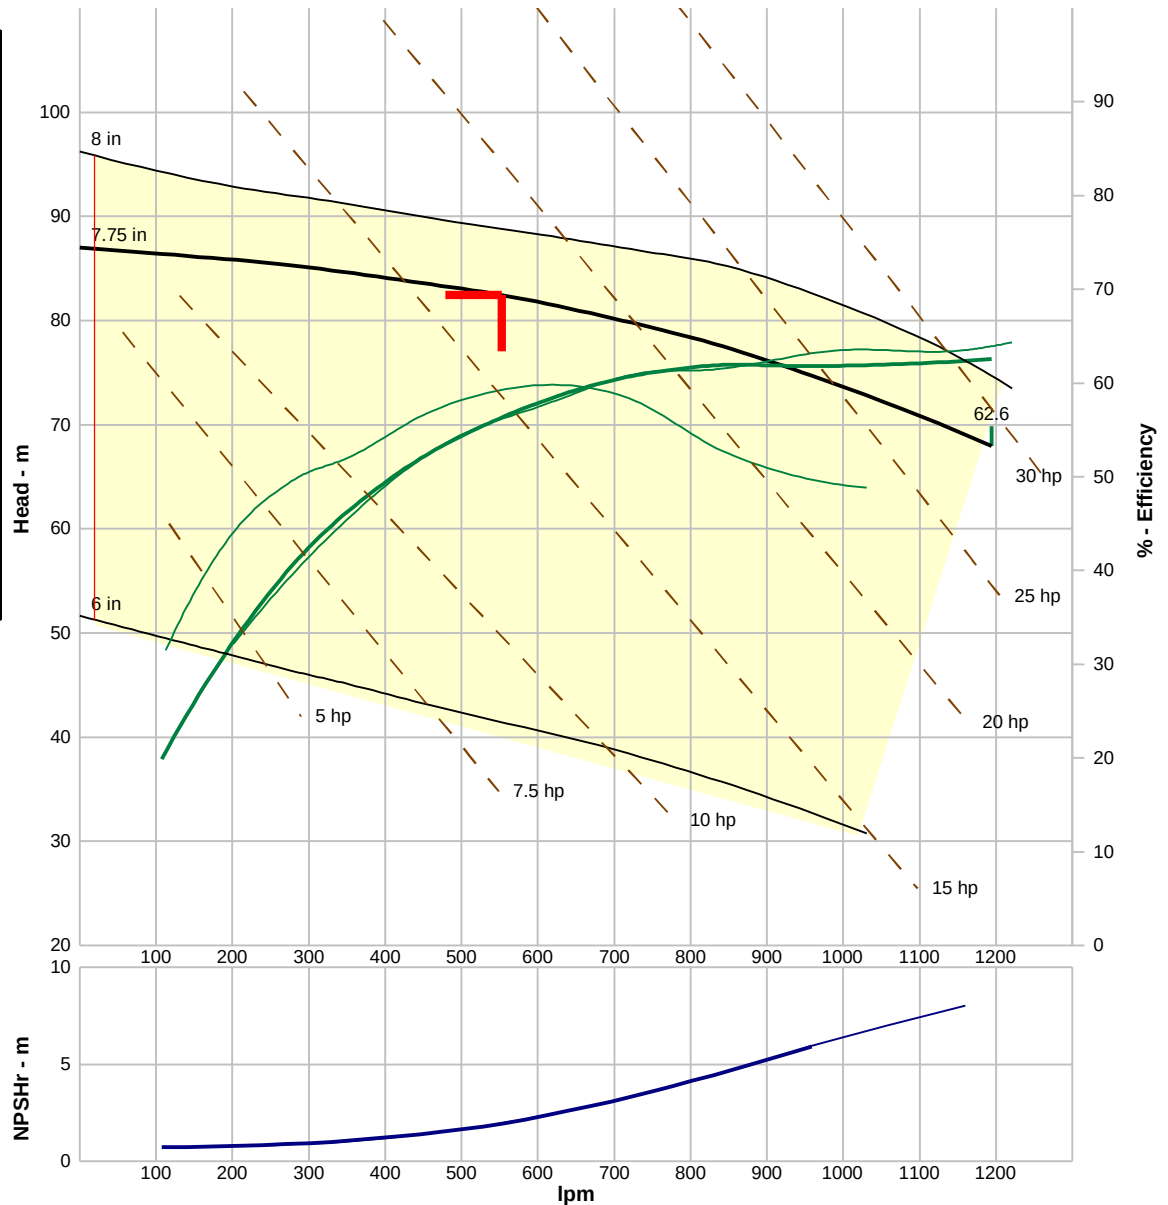

Performance Evaluation:

Flow lpm	Speed rpm	Head m	Efficiency %	Power hp	NPSHr m
663	3516	80.8	59	19.1	2.85
553	3516	82.5	56	17.2	2.01
442	3516	83.7	52	15.2	1.41
332	3516	84.8	44	13.3	1
221	3516	85.7	34	11.6	0.837