

Company: P-1001 INOXPA
 Name: BOMBA AGUA CALIENTE
 Date: 4/28/2026



Pump:

Size: 50-260
 Type: PROLAC HCP
 Synch Speed: 3600 rpm
 Curve: 01.030.12.0026
 Specific Speeds:
 Dimensions:
 Speed: 3468 rpm
 Dia: 210 mm
 Impeller:
 Ns: ---
 Nss: ---
 Suction: ---
 Discharge: ---

Pump Limits:

Temperature: 248 °F
 Pressure: 232 psi g
 Sphere Size: ---
 Power: 60.3 hp
 Eye Area: ---

Operating Point:

Flow: 552.67 lpm Head: 82.4552 m


Fluid:

Water
 Density: 0.969893 g/cm³
 Viscosity: 0.3412 cP
 NPSHa: ---
 Temperature: 83 °C
 Vapor Pressure: 7.756 psi a
 Atm Pressure: 13.03 psi a

Motor:

Size: 25 hp
 Speed: 3600 rpm
 Frame: 284TS

---- Duty Point ----	
Flow:	553 lpm
Head:	82.5 m
Eff:	53%
Power:	18.4 hp
NPSHr:	1.32 m
---- Design Curve ----	
Shutoff Head:	89.7 m
Shutoff dP:	124 psi
Min Flow:	---
BEP:	52.7% @ 613 lpm
NOL Power:	20.3 hp @ 760 lpm
-- Max Curve --	
Max Power:	46.9 hp @ 999 lpm

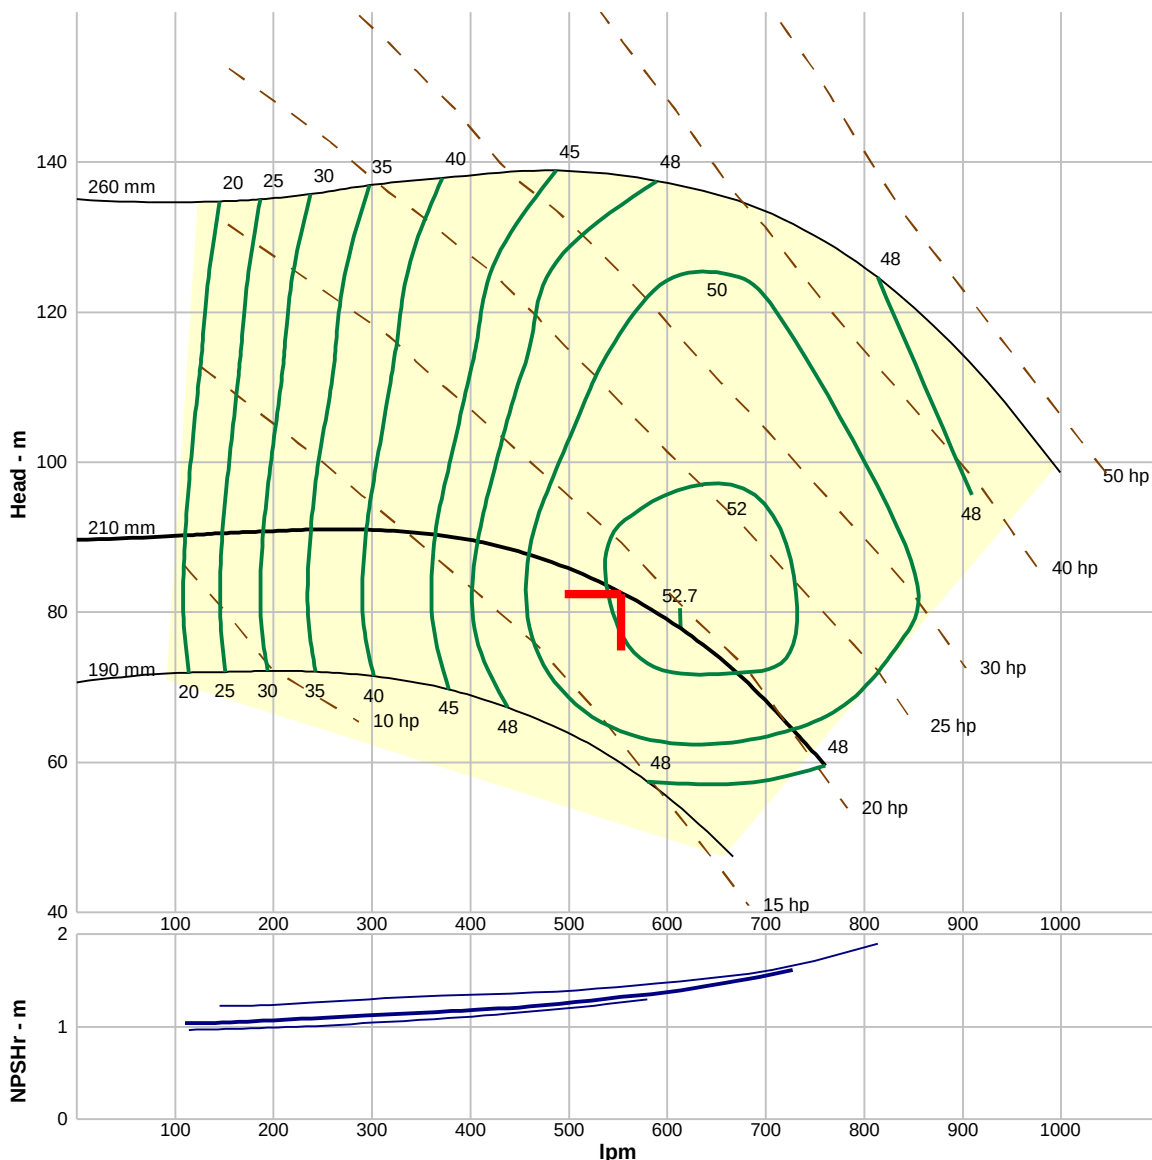

Nonbinding data if it is not subject to INOXPA quotation / Datos no vinculantes si no está sujeta a una oferta de INOXPA

Performance Evaluation:

Flow lpm	Speed rpm	Head m	Efficiency %	Power hp	NPSHr m
663	3468	72.7	53	19.5	1.48
553	3468	82.5	53	18.4	1.32
442	3468	88.3	49	16.8	1.21
332	3468	90.7	43	14.9	1.14
221	3468	91	33	12.8	1.08