


15.0 DESCARGA BOMBA PP30BT17

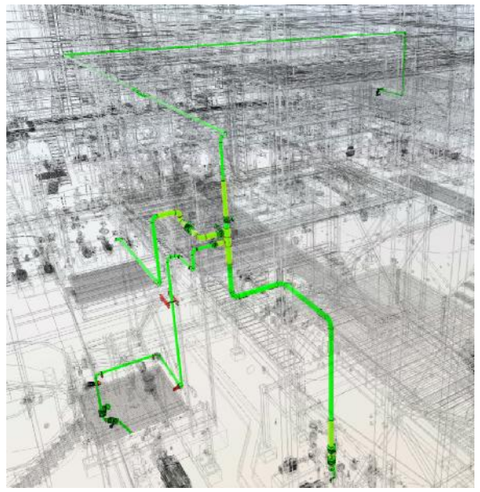

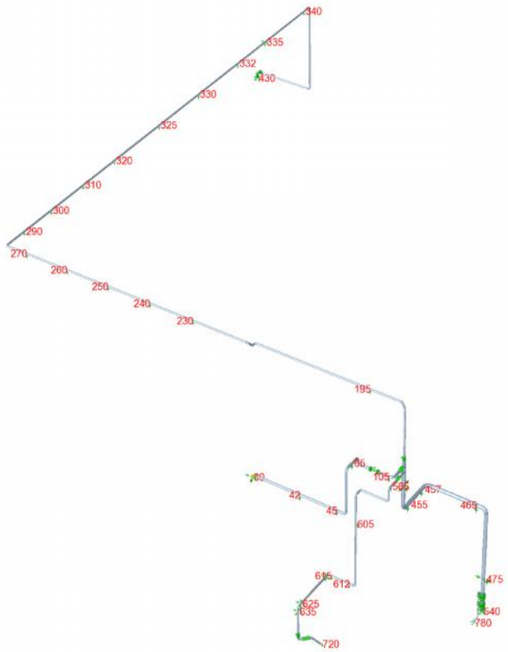

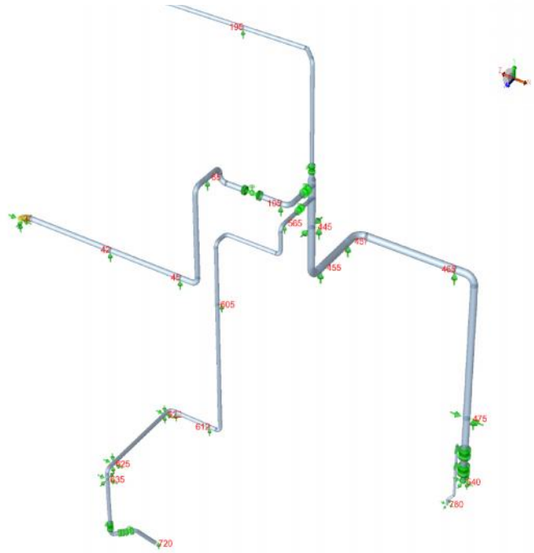

LOAD CASE DEFINITION KEY

CASE 1 (OPE) W+T1+P2
CASE 2 (Alt-SUS) W+P2
CASE 3 (OPE) W+T2+P2
CASE 4 (Alt-SUS) W+P2
CASE 5 (SUS) W
CASE 6 (SUS) W+P2
CASE 7 (EXP) L7=L1-L5
CASE 8 (EXP) L8=L3-L6
CASE 9 (EXP) L9=L1-L3

Note: For a complete breakdown of code-defined stress components, see the Stresses report.
Piping Code: B31.3 = B31.3 -2016, Jan 31, 2017

*** CODE COMPLIANCE EVALUATION PASSED ***

Highest Stresses: (KPa)			
Ratio (%):	44.9	@Node 230	LOADCASE: 6 (SUS) W+P2
Code Stress:	51675.3	Allowable Stress:	115142.4
Axial Stress:	15316.1	@Node 475	LOADCASE: 1 (OPE) W+T1+P2
Bending Stress:	50382.2	@Node 500	LOADCASE: 2 (Alt-SUS) W+P2
Torsion Stress:	9779.5	@Node 200	LOADCASE: 3 (OPE) W+T2+P2
Hoop Stress:	29436.7	@Node 150	LOADCASE: 1 (OPE) W+T1+P2
Max Stress Intensity:	56226.9	@Node 500	LOADCASE: 2 (Alt-SUS) W+P2

CAESAR II 2019 Ver.11.00.00.4800, (Build 190424) Date: OCT 5, 2026 Time: 16:9
Job Name: P2603-PR-SIM-019
Licensed To: Licensed To: Edit name in <system>\company.txt
RESTRAINTS EXTENDED REPORT: Loads On Restraints
CASE 6 (SUS) W+P2

Node	FX N.	FY N.	FZ N.	Resultant Force N.	MX N.m.	MY N.m.	MZ N.m.	Resultant Moment N.m.	Restraint Type/Tag
30	0	0	0	0	0	0	0	0	TYPE=Rigid X w/gap;
30	0	-57	0	57	0	0	0	0	TYPE=Rigid +Y w/gap;
30	0	0	0	0	0	0	0	0	TYPE=Rigid Z w/gap;
42	0	-727	0	727	0	0	0	0	TYPE=Rigid +Y;
45	0	0	0	0	0	0	0	0	TYPE=Rigid +Y;
65	0	-1006	0	1006	0	0	0	0	TYPE=Rigid +Y;
105	0	-764	0	764	0	0	0	0	TYPE=Rigid +Y;
195	0	-1025	0	1025	0	0	0	0	TYPE=Rigid +Y;
230	0	-978	0	978	0	0	0	0	TYPE=Rigid +Y;
240	0	0	0	0	0	0	0	0	TYPE=Rigid +Y;
250	0	-170	0	170	0	0	0	0	TYPE=Rigid +Y;
260	0	-308	0	308	0	0	0	0	TYPE=Rigid +Y;
270	0	-250	0	250	0	0	0	0	TYPE=Rigid +Y;
290	0	-283	0	283	0	0	0	0	TYPE=Rigid +Y;
300	0	-237	0	237	0	0	0	0	TYPE=Rigid +Y;
310	0	-259	0	259	0	0	0	0	TYPE=Rigid +Y;
320	0	-363	0	363	0	0	0	0	TYPE=Rigid +Y;
325	0	-410	0	410	0	0	0	0	TYPE=Rigid +Y;
330	0	-385	0	385	0	0	0	0	TYPE=Rigid +Y;
332	0	-373	0	373	0	0	0	0	TYPE=Rigid +Y;
335	0	-204	0	204	0	0	0	0	TYPE=Rigid +Y;
335	0	0	4	4	0	0	0	0	TYPE=Rigid Z;
340	0	-1105	0	1105	0	0	0	0	TYPE=Rigid +Y;
430	1	0	0	1	0	0	0	0	TYPE=Rigid X w/gap;
430	0	-601	0	601	0	0	0	0	TYPE=Rigid +Y w/gap;
430	0	0	-3	3	0	0	0	0	TYPE=Rigid Z w/gap;
445	0	0	0	0	0	0	0	0	TYPE=Rigid X w/gap;
445	0	-1438	0	1438	0	0	0	0	TYPE=Rigid +Y;
455	0	0	0	0	0	0	0	0	TYPE=Rigid +Y;
457	0	-797	0	797	0	0	0	0	TYPE=Rigid +Y;
465	0	-1288	0	1288	0	0	0	0	TYPE=Rigid +Y;
475	0	-2142	0	2142	0	0	0	0	TYPE=Rigid +Y;
475	0	0	0	0	0	0	0	0	TYPE=Rigid Z w/gap;
540	2	0	0	2	0	0	0	0	TYPE=Rigid X w/gap;
540	0	0	0	0	0	0	0	0	TYPE=Rigid Y w/gap;
540	0	0	0	0	0	0	0	0	TYPE=Rigid Z w/gap;
565	0	-299	0	299	0	0	0	0	TYPE=Rigid +Y;
605	0	-761	0	761	0	0	0	0	TYPE=Rigid +Y;
612	0	0	0	0	0	0	0	0	TYPE=Rigid +Y;
615	0	0	0	0	0	0	0	0	TYPE=Rigid +Y;
622	0	-142	0	142	0	0	0	0	TYPE=Rigid Y;
622	0	0	-0	0	0	0	0	0	TYPE=Rigid Z;
625	0	-834	0	834	0	0	0	0	TYPE=Rigid Y w/gap;
625	0	0	0	0	0	0	0	0	TYPE=Rigid Z w/gap;
635	-3	0	0	3	0	0	0	0	TYPE=Rigid X w/gap;
635	0	0	0	0	0	0	0	0	TYPE=Rigid Z w/gap;
720	0	-88	0	88	0	0	0	0	TYPE=Rigid +Y w/gap;
780	0	0	0	0	0	0	0	0	TYPE=Rigid X w/gap;
780	0	0	0	0	0	0	0	0	TYPE=Rigid Z w/gap;