


15.0 DESCARGA BOMBA PP30BT17

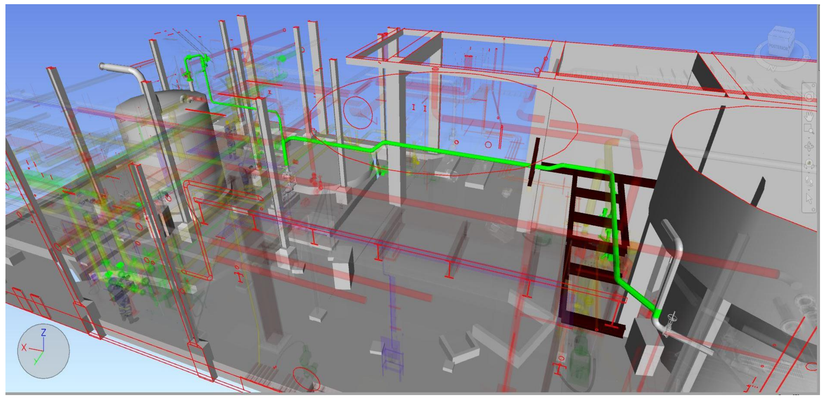

inicial

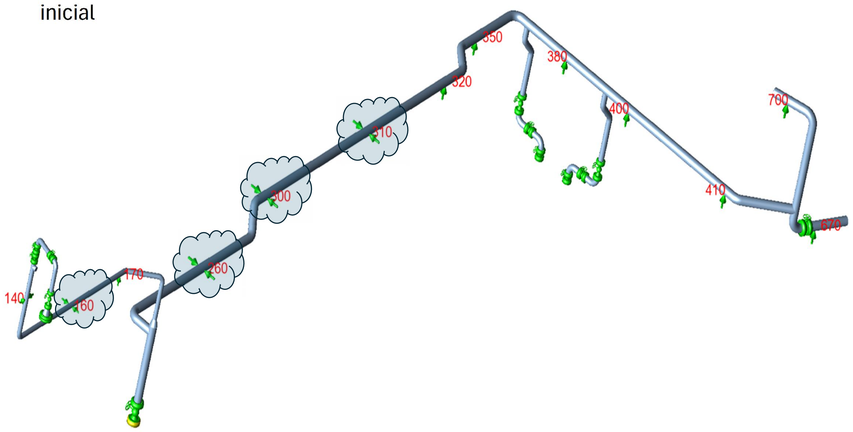

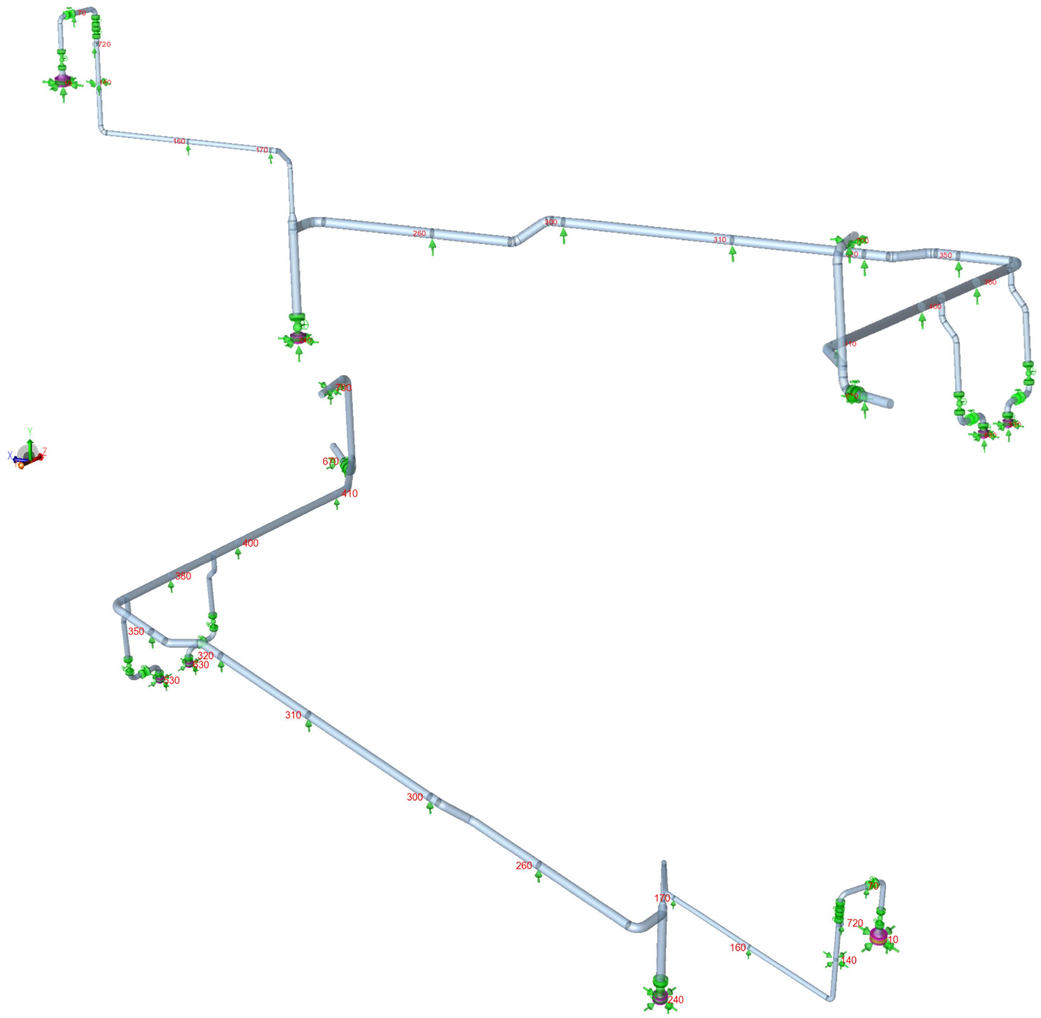

Note: For a complete breakdown of code-defined stress components, see the Stresses report.
Piping Code: B31.3 = B31.3 -2016, Jan 31, 2017

*** CODE COMPLIANCE EVALUATION PASSED ***

Highest Stresses: (KPa)			
Ratio (%):	42.3	@Node 438	LOADCASE: 6 (SUS) W+P2
Code Stress:	48675.8	Allowable Stress:	115142.4
Axial Stress:	14611.7	@Node 210	LOADCASE: 6 (SUS) W+P2
Bending Stress:	49301.6	@Node 438	LOADCASE: 1 (OPE) W+T1+P2
Torsion Stress:	4090.3	@Node 359	LOADCASE: 1 (OPE) W+T1+P2
Hoop Stress:	29436.7	@Node 20	LOADCASE: 1 (OPE) W+T1+P2
Max Stress Intensity:	61410.3	@Node 438	LOADCASE: 1 (OPE) W+T1+P2

CASE 6 (SUS) W+P2

Node	FX N.	FY N.	FZ N.	Resultant Force N.	MX N.m.	MY N.m.	MZ N.m.	Resultant Moment N.m.	Restraint Type/Tag
10	0	0	0	0	0	0	0	0	TYPE=Rigid X w/gap;
10	0	-897	0	897	0	0	0	0	TYPE=Rigid +Y;
10	0	0	-4	4	0	0	0	0	TYPE=Rigid Z w/gap;
70	0	0	0	0	0	0	0	0	TYPE=Rigid +Y;
140	0	0	0	0	0	0	0	0	TYPE=Rigid X w/gap;
140	0	0	0	0	0	0	0	0	TYPE=Rigid Z w/gap;
140	0	0	0	0	0	0	0	0	TYPE=Rigid +Y;
160	0	-56	0	56	0	0	0	0	TYPE=Rigid +Y;
170	0	-849	0	849	0	0	0	0	TYPE=Rigid +Y;
240	-41	0	0	41	0	0	0	0	TYPE=Rigid X w/gap;
240	0	-1248	0	1248	0	0	0	0	TYPE=Rigid +Y w/gap;
240	0	0	14	14	0	0	0	0	TYPE=Rigid Z w/gap;
260	0	-2090	0	2090	0	0	0	0	TYPE=Rigid +Y;
300	0	-302	0	302	0	0	0	0	TYPE=Rigid +Y;
310	0	-1489	0	1489	0	0	0	0	TYPE=Rigid +Y;
320	0	-92	0	92	0	0	0	0	TYPE=Rigid +Y;
350	0	-1099	0	1099	0	0	0	0	TYPE=Rigid +Y;
380	0	-4006	0	4006	0	0	0	0	TYPE=Rigid +Y;
400	0	-822	0	822	0	0	0	0	TYPE=Rigid +Y;
410	0	-1028	0	1028	0	0	0	0	TYPE=Rigid +Y;
530	24	0	0	24	0	0	0	0	TYPE=Rigid X w/gap;
530	0	-88	0	88	0	0	0	0	TYPE=Rigid +Y w/gap;
530	0	0	27	27	0	0	0	0	TYPE=Rigid Z w/gap;

630	43	0	0	43	0	0	0	0	TYPE=Rigid X w/gap;
630	0	0	0	0	0	0	0	0	TYPE=Rigid +Y w/gap;
630	0	0	-37	37	0	0	0	0	TYPE=Rigid Z w/gap;
670	0	-1467	0	1467	0	0	0	0	TYPE=Rigid +Y;
670	0	0	0	0	0	0	0	0	TYPE=Rigid X w/gap;
670	0	0	0	0	0	0	0	0	TYPE=Rigid Z w/gap;
700	0	-501	0	501	0	0	0	0	TYPE=Rigid +Y;
700	-26	0	0	26	0	0	0	0	TYPE=Rigid X;
700	0	0	0	0	0	0	0	0	TYPE=Rigid Z w/gap;
720	0	-716	0	716	0	0	0	0	TYPE=Rigid +Y;