

PRODUCT NO.	1
DSHP03TJGET	RoHS compliant

NOTES :1.Specification:

1>.Operating force:1000gf Max

2>.Operating Temperature: -40° to+85°

3>.Storage Temperature: -40° to+85°

4>.Electrical life Life:2000cycles 25mA 24VDC

5>.Mechanical Life:3000cycles Operations




2. PLATING:

GOLD FLASH 1u"~2u" SOLDER TAIL, 1u"~3u" GOLD PLATING ON THE CONTACT AREA, WITH 50u" NICKEL UNDERPLATING OVERALL.



3. PART NUMBER DESCRIPTION :

DSHP XX T J G E T


- [包装方式: T=管装 R=Reel]
- [电镀层 :E= 接触部 1u"~3u" 焊脚部 1u"~2u"]
- [G= 镀全金 S= 内镀金(接触部)外镀锡 (焊脚部)]
- [脚型: S脚 / J脚 / H脚 / A脚 / Z脚]
- [T= 低推贴胶 S= 低推不贴胶 L=长推]
- [产品数 :02=2P 04=4P 08=8P 10=10P]

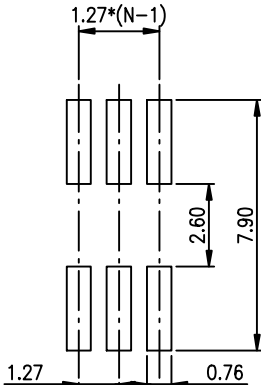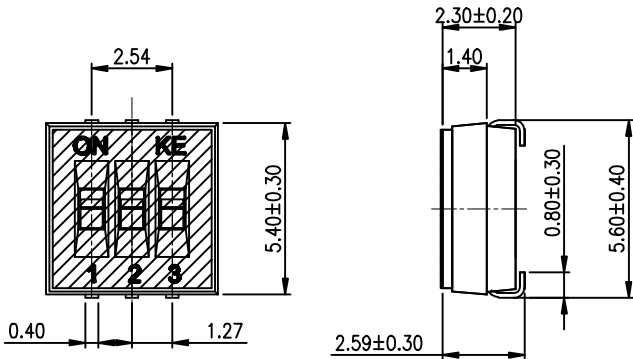

RECOMMENDED P.C.B. LAYOUT (TOP VIEW)



Number	Part Name	Material	Finished
①	Actuator	UL94 V0	White
②	Cover	UL94 V0	Black
③	Movable	Beryllium Copper	1u"~3u" Gold
④	Terminal	Brass	1u"~2u" Gold
⑤	Base	UL94 V0	Black
⑥	Terminal Contact	Brass	1u"~3u" Gold
⑦	Mylar	UL94 V0	0.05mm

TOLERANCE UNLESS OTHERWISE SPECIFIED		INSPECTION COPY	 东莞市广誉实业有限公司 DongGuan Kingtek Industrial Co., Ltd.			
LINER	ANGLES					
.0 ± 0.25	0. ± 2°	PROJECTION	TITLE BY DSHP SERIES PITCH 1.27mm PRODUCT FAMILY DSHP SERIES PRAT NO. DSHP03TJGET FILE NO. DSHP03TJGET-A			
.00 ± 0.15	.0 ± 1°					
.000± 0.10	.00± 0.5°					
DESIGN	kathy	03/20/12°				
DRAWING						
CHECK						
APPRO.						
			SIZE	UNIT	SCALE	SHEET
			A4	mm	2 : 1	1 OF 1
						REV. A