

# 7 INCH HD DISPLAY Quick Start

#### 1 Product introduction

- Simple fashion design, support multiple installation mode, 7 inch high brightness liquid crystal display, 800 \*480 or 1024\* 600 resolution
- The structure of the universal original product and the increase of audio and video input (the exclusive patented product has this function)
- High sensitivity USB free drive CTP capacitive screen
- Support all PI with HDMI input interface
- Support the left and right channel loudspeaker output
- Support 12V power supply and mobile power supply (USB 5V2A) power supply

### 2 Specifications

- Screen size 屏幕尺寸: 7inch 16:9
- Resolving power 分辨率: 800(H)\*480(V) Or 1024(H) \*600
- visible area 可视区域 : 154.8(W)\*85.92(H)mm
- viewing angle 可视角度: 130°(H)\*115°(V)
- brightness 亮度: 400cd/m2
- contrast ratio 对比度: 500:1
- response time 响应时间: 12ms
- Audio and video input 音视频输入: IVp-Pcvbs
- HD input HD 输入: 640 x 350 1920 x 1200 Suppor PAL、NTSC
- speaker out 扬声器输出: 2W8Q
- working temperature 工作温度: 0~40\*C



#### 3 Hardware Connect


# 3.1 Connect HDMI or AV, Connect usb



# 3.2 Select input method by press(Signal Input selection)





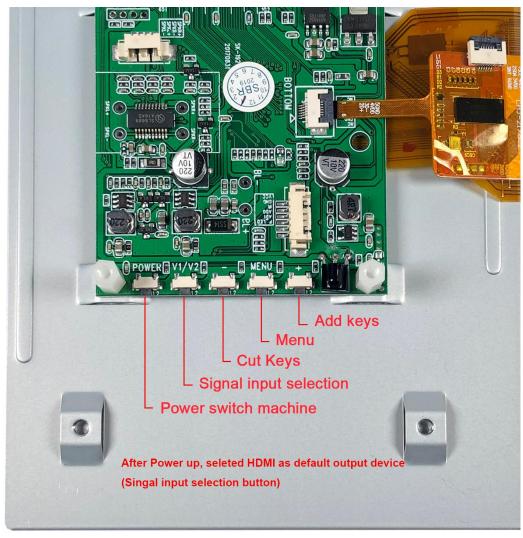



### 3.3 loudspeaker Function

Add loudspeaker by connect them to the cable we provide.

