


| UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS | | | | | | | DEBUR AND BREAK SHARP | DO NOT SCALE DRAWING REVISION | | | |
|---|------|------|--------|------|-----------|--|--------------------------|-------------------------------|-------|--------|----|
| SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR: | | | | | rnas EDG | | | | | | |
| | NAME | SIGN | IATURE | DATE | | | | TITLE: | | | |
| DRAWN | | | | | | | | | | | |
| CHK'D | | | | | | | | | | | |
| APPV'D | | | | | | | | | | | |
| MFG | | | | | | | | | | | |
| Q.A | | | | | MATERIAL: | | | Plasma-XY-V | | -V0.3 | А3 |
| | | | | | 7 | | | | | | |
| | | | | | WEIGHT: | | | SCALE:1:5 | SHEET | 1 OF 1 | |

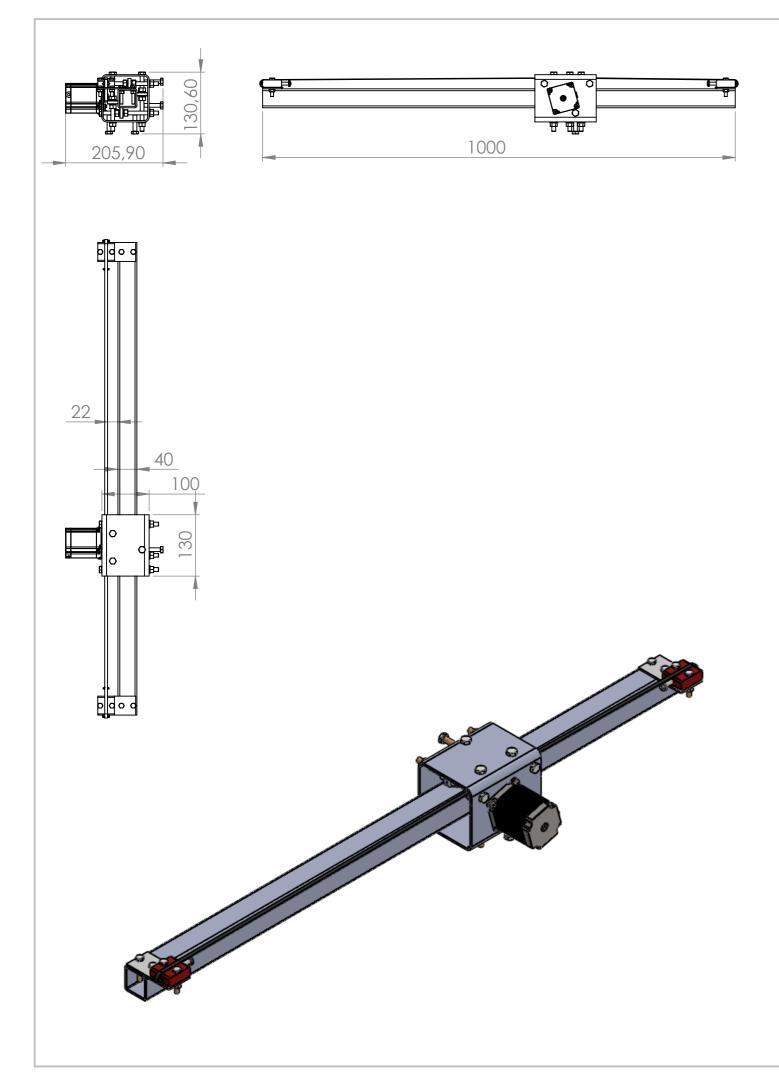

| ITEM NO. | QTY. | PART | NUMBER | | DESCRIPTION | | |
|--|-----------|------------------|-----------------------------------|---------|--|------------|--|
| 1 | 1 | Profile-40x40 |)x3-1000mi | m - X | | | |
| 2 | 1 | Mot | untV0.3 | | | | |
| 2.1 | 1 | Profile-100x10 | 00x2-130m | m-V0.3 | | | |
| 2.2 | 6 | DIN_9 | 33_M8x120 |) | DIN 933 M8x75 POCINKANO | | |
| 2.3 | 6 | Bear | ing 608ZZ | | Bearin | g 608ZZ | |
| 2.4 | 4 | Belt be | aring F608 | SZ | | | |
| 2.5 | 1 | Stepper moto | or NEMA 23 | 3HS7430 | | | |
| 2.6 | 1 | Timing pulley | T2 6mm 2 | 0 teeth | | | |
| 2.7 | 4 | | M5 | | Kunststoffscheibe aus Polyamid in den größen M2 - M20. | | |
| 2.8 | 4 | ISO 7045 - N | 15 x 16 - Z - | 16N | | | |
| 2.9 | 4 | Mutter D | IN-934 M5- | -A2 | Mutter DIN-934 Dimensionen: M2,5 - M16 | | |
| 2.10 | 10 | | M8 | | Kunststoffscheibe aus Polyamid in den größen M2 - M20. | | |
| 2.11 | 4 | D | efault | | DIN 933 M8x35 POCINKAN | | |
| 2.12 | 12 | Spring Wash | ner M8 214 | 16-025 | M8 SPRING WASHER | | |
| 2.13 | 18 | D | efault | | DIN 934 M8 | 3 POCINKAN | |
| 3 | 2 | Tigl | ntener | | | | |
| 3.1 | 1 | Tighte | ner - plate |) | | | |
| 3.2 | 1 | Tighten | er - housin | g | | | |
| 3.3 | 1 | Tighte | ener - stick | | | | |
| 3.4 | 2 | DIN_9 | 33_M6x35 | | DIN 933 M6x35 POCINKAN | | |
| 3.5 | 2 | DIN 6 | 902-C4.55 | | | | |
| 3.6 | 2 | DIN_ | _934_M6 | | DIN 934 M6 POCINKANO | | |
| 3.7 | 1 | ISO 7045 - N | 16 x 30 - Z - | 30N | | | |
| 4 | 4 | DIN_9 | 33_M6x35 | | DIN 933 M6x35 POCINKAN | | |
| 5 | 4 | DIN 6 | 902-C5.5 | | | | |
| 6 | 4 | DIN_ | 934_M6 | | DIN 934 M6 POCINKANO | | |
| 7 | 1 | Timing b | elt T2 6mn | n | | | |
| UNLESS OTHERWISE SPECIF DIMENSIONS ARE IN MILLIN SURFACE FINISH: TOLERANCES: LINEAR: | | rnas | DEBUR AND BREAK SHARP EDGES | | DO NOT SCALE DRAWING | REVISION | |
| ANGULAR: | SIGNATURE | DATE Www.imas.eu | | TITLE: | | | |
| DRAWN | | | | 1 | | | |
| CHK'D APPV'D | | | | - | | | |
| MFG | | 14: | | 1 | | | |
| Q.A | | MATERIAL: | | DWG NO. | Gantry X | | |
| | | | | | | | |

SCALE:1:8

SHEET 1 OF 1

WEIGHT:

