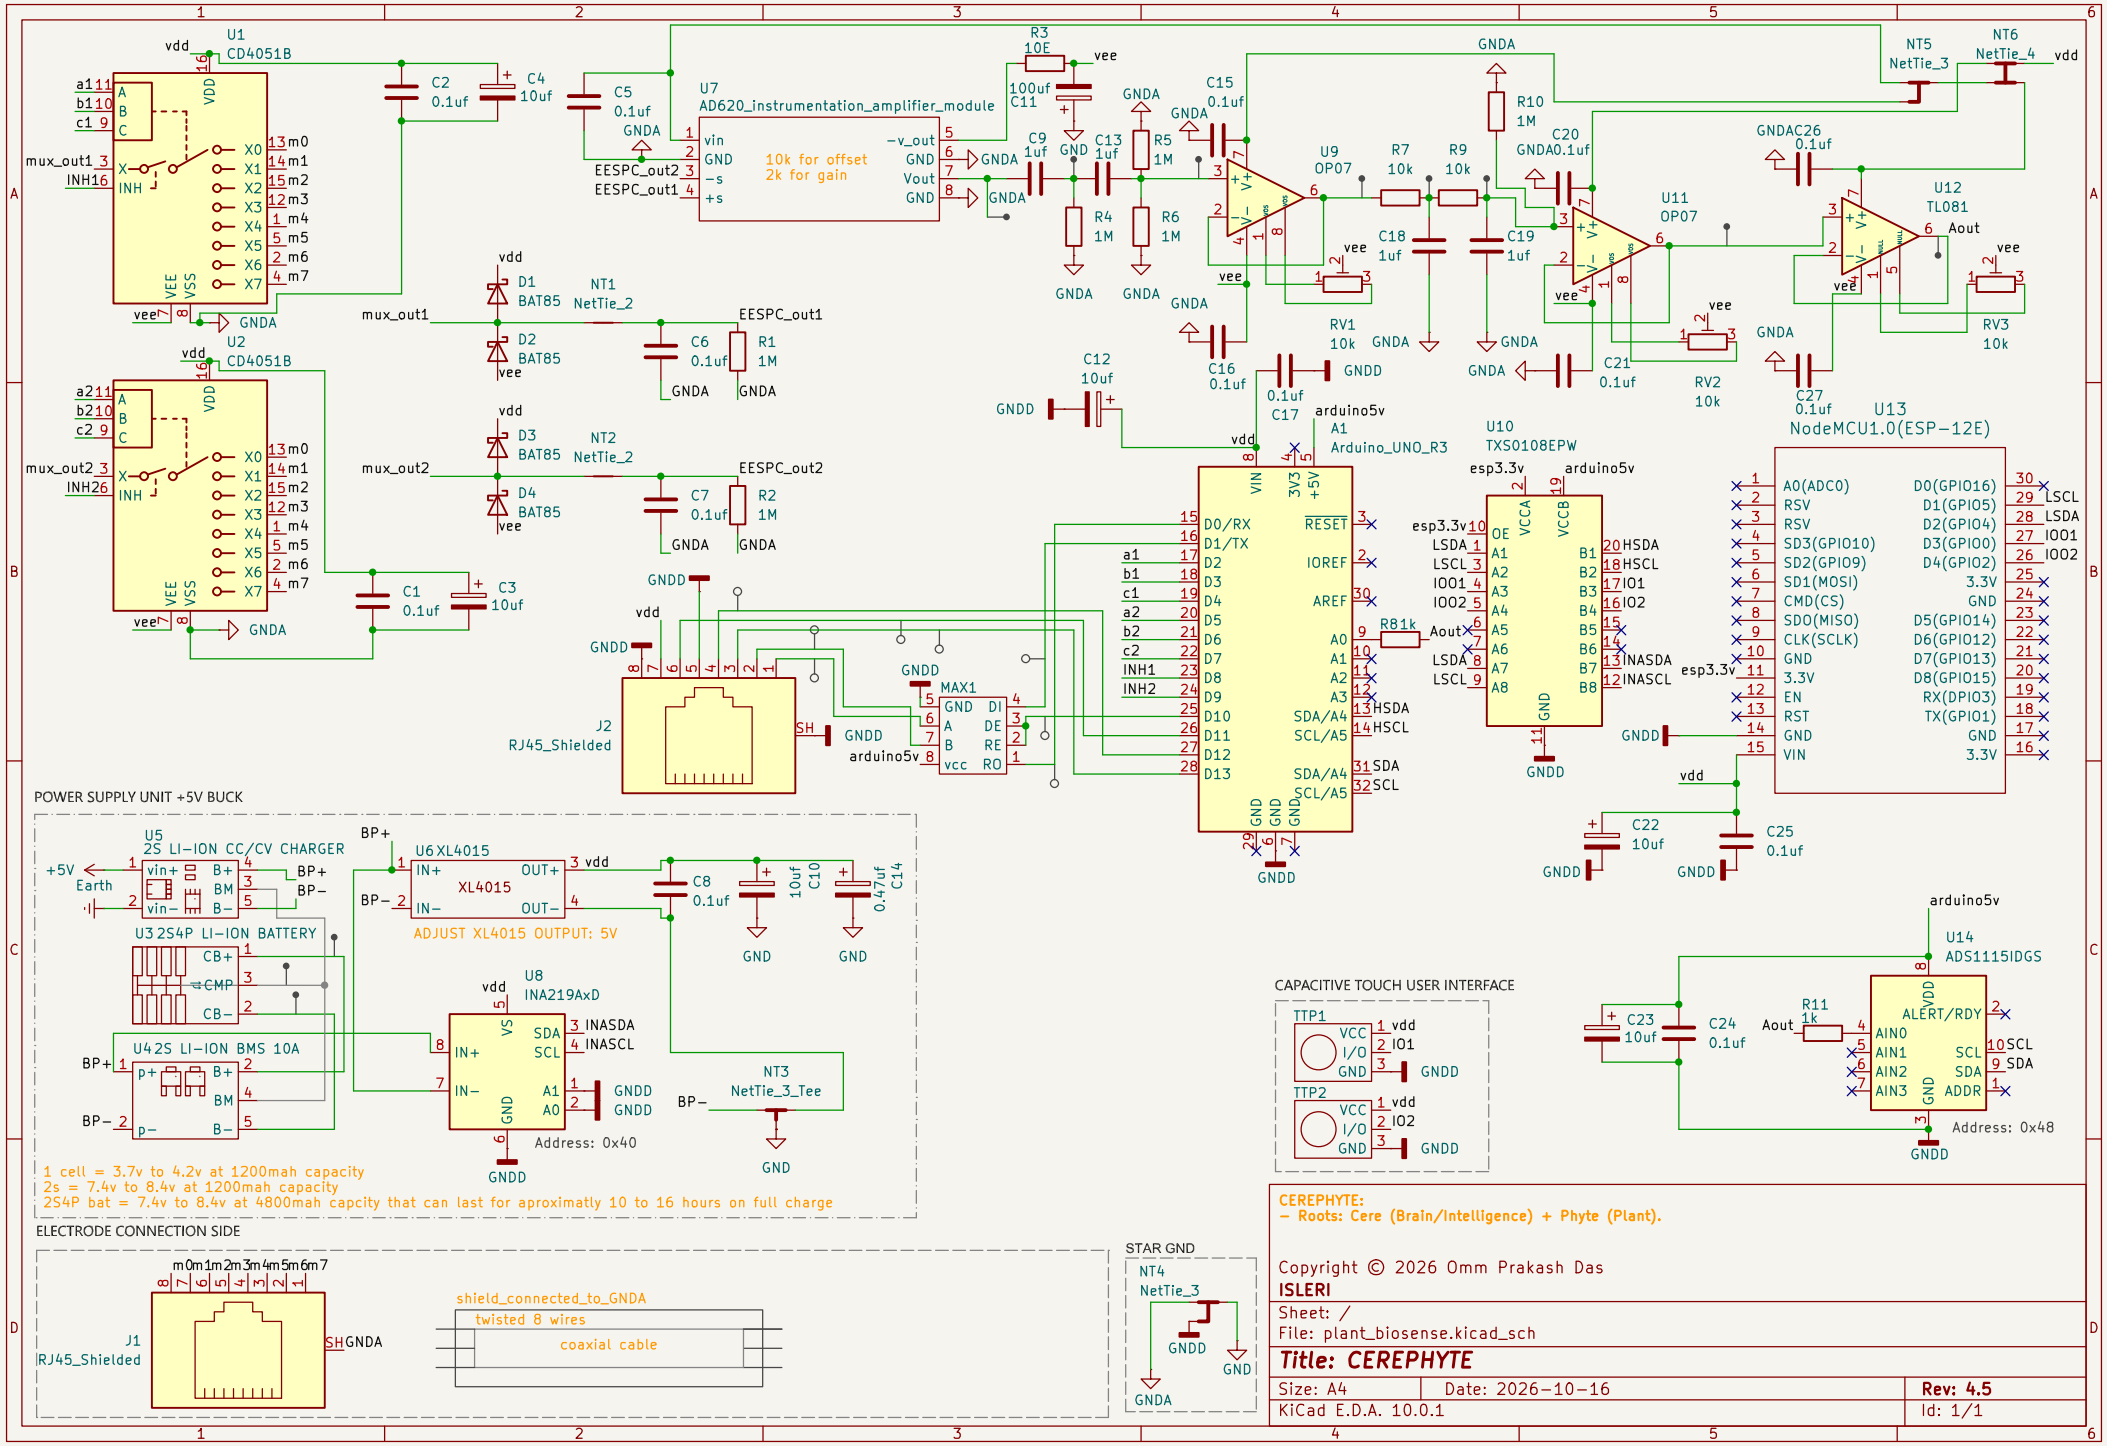

U1
CD4051B
U2
CD4051B
mux_out1
mux_out2
INH16
INH26
C1 0.1uf
C2 0.1uf
C3 10uf
C4 10uf
D1 BAT85
D2 BAT85
D3 BAT85
D4 BAT85
NT1 NetTie_2
NT2 NetTie_2
C6 0.1uf
C7 0.1uf
R1 1M
R2 1M
EESPC_out1
EESPC_out2
U7
AD620_instrumentation_amplifier_module
10k for offset
2k for gain
C5 0.1uf
R3 10E
C11 100uf
C9 1uf
C13 1uf
R4 1M
R5 1M
R6 1M
C15 0.1uf
C16 0.1uf
U9 OP07
R7 10k
R9 10k
R10 1M
C18 1uf
C19 1uf
C20 0.1uf
U11 OP07
C21 0.1uf
RV1 10k
RV2 10k
RV3 10k
C12 10uf
C17 0.1uf
U12 TL081
C26 0.1uf
C27 0.1uf
NT5 NetTie_3
NT6 NetTie_4
A1 Arduino_UNO_R3
U10 TXS0108EPW
R81k
J2 RJ45_Shielded
MAX1
U13 NodeMCU1.0(ESP-12E)
C22 10uf
C25 0.1uf
POWER SUPPLY UNIT +5V BUCK
U5 2S LI-ION CC/CV CHARGER
U3 2S4P LI-ION BATTERY
U4 2S LI-ION BMS 10A
U6 XL4015
ADJUST XL4015 OUTPUT: 5V
C8 0.1uf
C10 10uf
C14 0.47uf
U8 INA219AxD
Address: 0x40
NT3 NetTie_3_Tee
1 cell = 3.7v to 4.2v at 1200mah capacity
2s = 7.4v to 8.4v at 1200mah capacity
2S4P bat = 7.4v to 8.4v at 4800mah capcity that can last for aproximatly 10 to 16 hours on full charge
CAPACITIVE TOUCH USER INTERFACE
TTP1
TTP2
U14 ADS1115IDGS
C23 10uf
C24 0.1uf
R11 1k
Address: 0x48
ELECTRODE CONNECTION SIDE
J1 RJ45_Shielded
shield_connected_to_GNDA
twisted 8 wires
coaxial cable
STAR GND
NT4 NetTie_3
CEREPHYTE:
– Roots: Cere (Brain/Intelligence) + Phyte (Plant).
Copyright © 2026 Omm Prakash Das
ISLERI
Sheet: /
File: plant_biosense.kicad_sch
Title: CEREPHYTE
Size: A4
Date: 2026-10-16
Rev: 4.5
KiCad E.D.A. 10.0.1
Id: 1/1