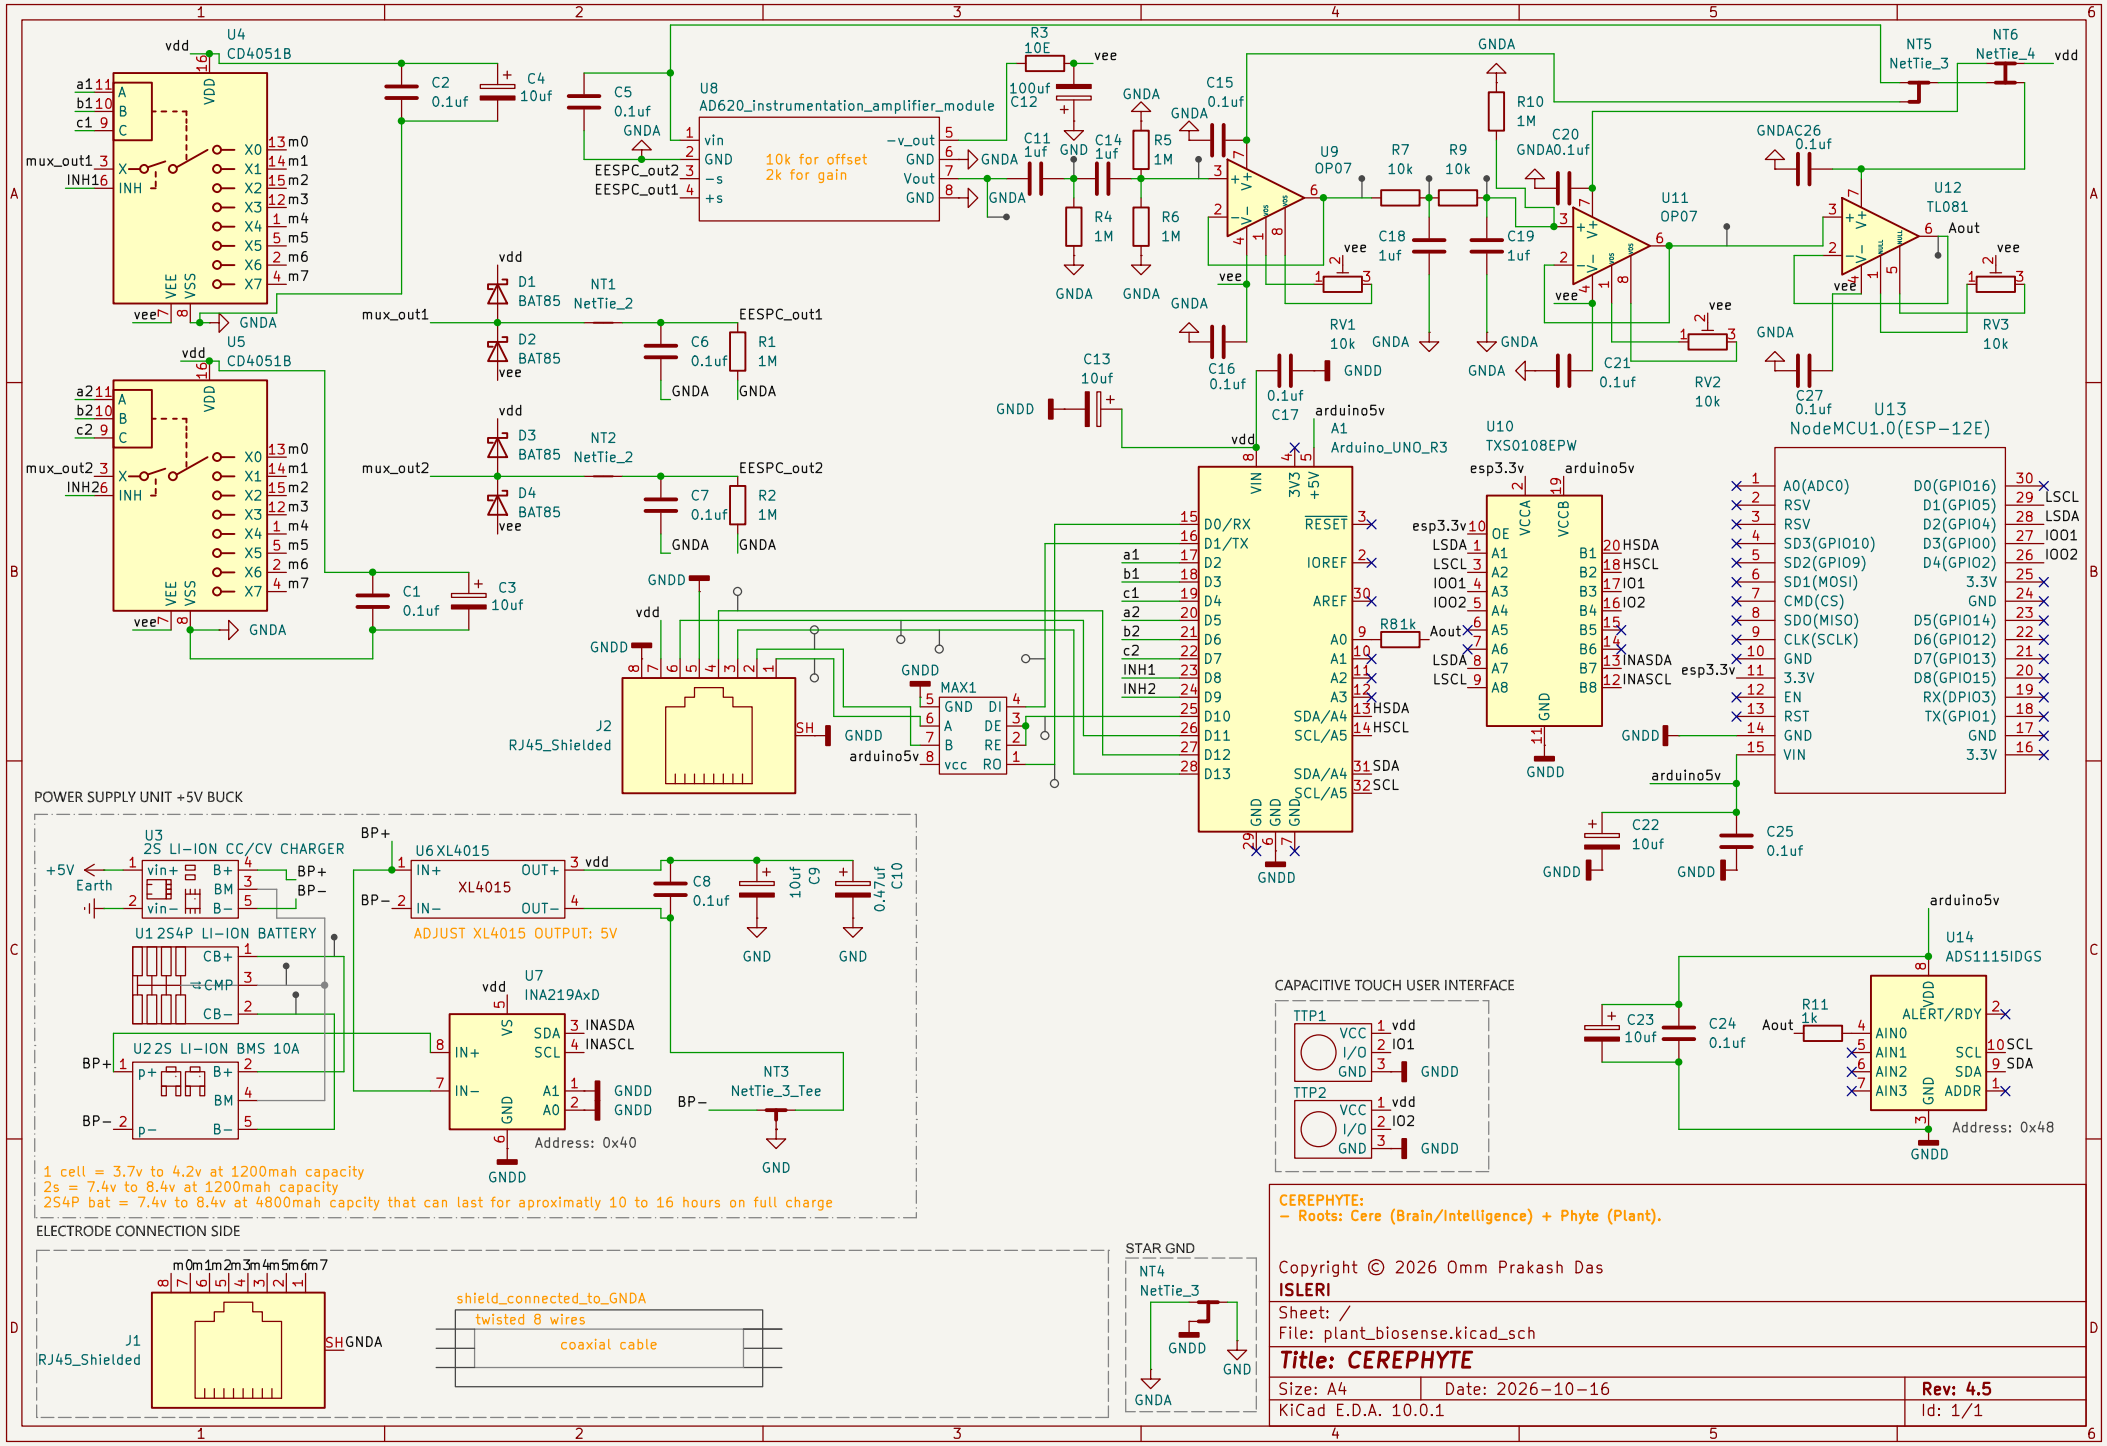

U4
CD4051B
U5
CD4051B
U8
AD620_instrumentation_amplifier_module
10k for offset
2k for gain
U9
OP07
U11
OP07
U12
TL081
U10
TXS0108EPW
U13
NodeMCU1.0(ESP-12E)
A1
Arduino_UNO_R3
J2
RJ45_Shielded
MAX1
POWER SUPPLY UNIT +5V BUCK
U3
2S LI-ION CC/CV CHARGER
U6 XL4015
ADJUST XL4015 OUTPUT: 5V
U1 2S4P LI-ION BATTERY
U2 2S LI-ION BMS 10A
U7
INA219AxD
Address: 0x40
1 cell = 3.7v to 4.2v at 1200mah capacity
2s = 7.4v to 8.4v at 1200mah capacity
2S4P bat = 7.4v to 8.4v at 4800mah capcity that can last for aproximatly 10 to 16 hours on full charge
CAPACITIVE TOUCH USER INTERFACE
TTP1
TTP2
U14
ADS1115IDGS
Address: 0x48
ELECTRODE CONNECTION SIDE
J1
RJ45_Shielded
shield_connected_to_GNDA
twisted 8 wires
coaxial cable
STAR GND
CEREPHYTE:
– Roots: Cere (Brain/Intelligence) + Phyte (Plant).
Copyright © 2026 Omm Prakash Das
ISLERI
Sheet: /
File: plant_biosense.kicad_sch
Title: CEREPHYTE
Size: A4
Date: 2026-10-16
Rev: 4.5
KiCad E.D.A. 10.0.1
Id: 1/1