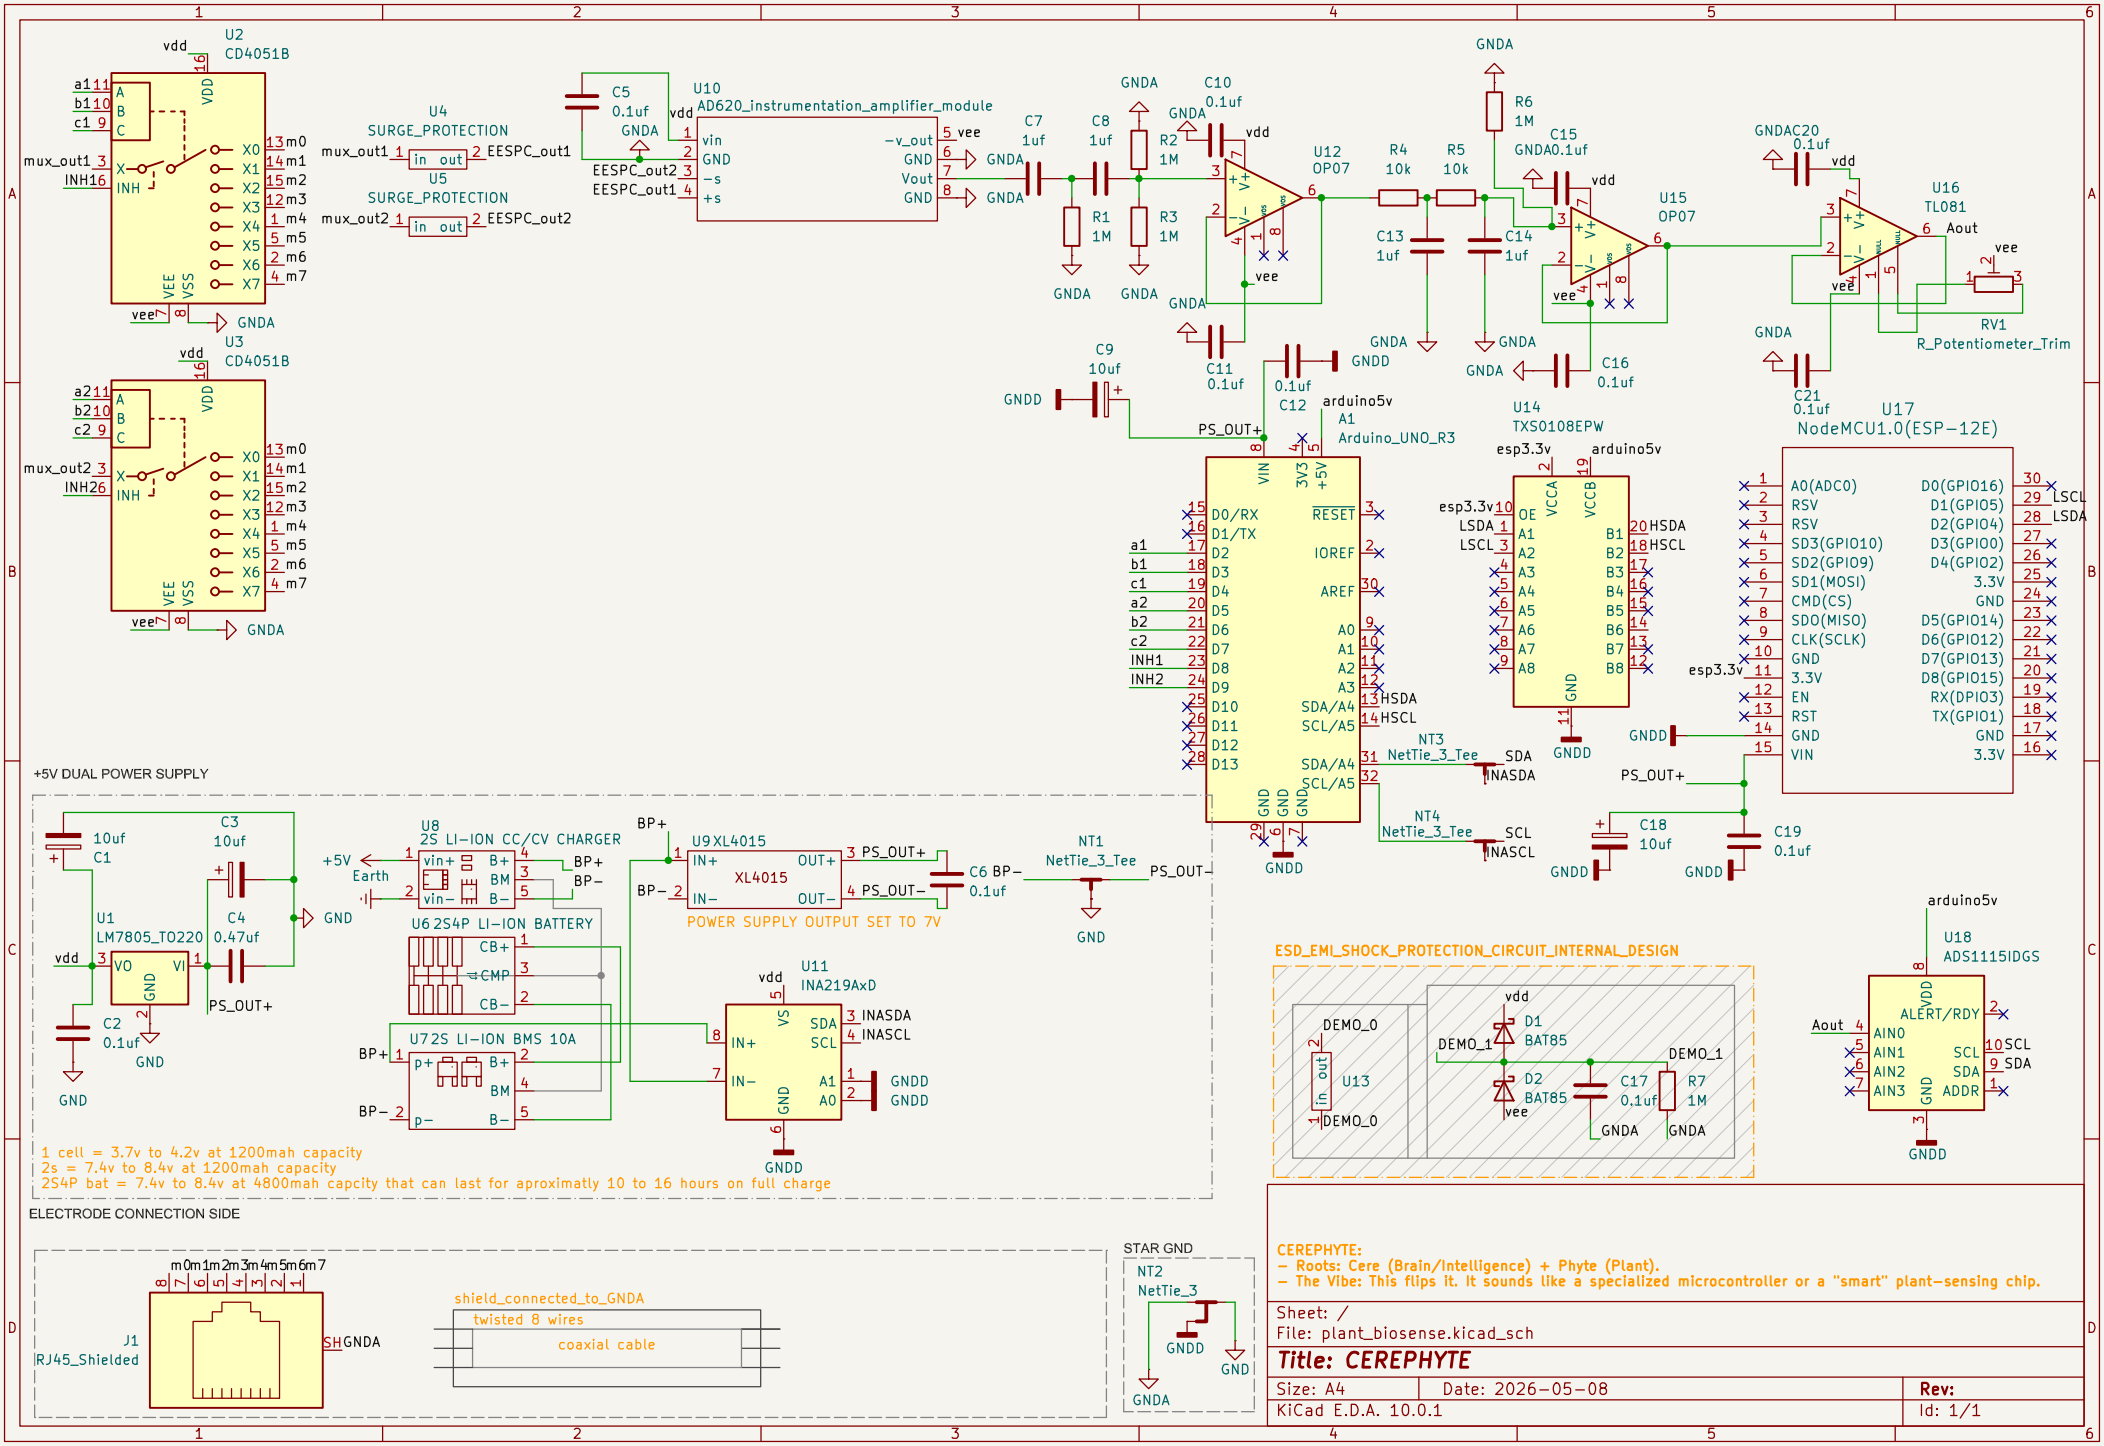
U2
CD4051B
U3
CD4051B
U4
SURGE_PROTECTION
U5
SURGE_PROTECTION
U10
AD620_instrumentation_amplifier_module
U12
OP07
U15
OP07
U16
TL081
U14
TXS0108EPW
U17
NodeMCU1.0(ESP-12E)
+5V DUAL POWER SUPPLY
U1
LM7805_TO220
U8
2S LI-ION CC/CV CHARGER
U9
XL4015
POWER SUPPLY OUTPUT SET TO 7V
U6
2S4P LI-ION BATTERY
U7
2S LI-ION BMS 10A
U11
INA219AxD
U13
U18
ADS1115IDGS
ESD_EMI_SHOCK_PROTECTION_CIRCUIT_INTERNAL_DESIGN
1 cell = 3.7v to 4.2v at 1200mah capacity
2s = 7.4v to 8.4v at 1200mah capacity
2S4P bat = 7.4v to 8.4v at 4800mah capcity that can last for aproximatly 10 to 16 hours on full charge
ELECTRODE CONNECTION SIDE
J1
RJ45_Shielded
shield_connected_to_GNDA
twisted 8 wires
coaxial cable
STAR GND
CEREPHYTE:
– Roots: Cere (Brain/Intelligence) + Phyte (Plant).
– The Vibe: This flips it. It sounds like a specialized microcontroller or a "smart" plant–sensing chip.
Sheet: /
File: plant_biosense.kicad_sch
Title: CEREPHYTE
Size: A4
Date: 2026-05-08
Rev:
KiCad E.D.A. 10.0.1
Id: 1/1