INTERNATIONAL TECHNICAL CERAMICS, LLC

Technical Data Sheet

ITC 303EC

Description: ITC 303EC Electrode Coat - A high temperature ceramic coating that is proven to achieve measurable reductions in electrode consumption. This material can be applied hot or cold. Once applied this coating encapsulates the electrode reducing sidewall oxidation leading to reductions in electrode consumption. Additionally the coating improves conductivity of electrodes by redistributing the electrical current flow eliminating stray arcs from the penciling effect of the electrode due to consumption.

Physical Properties: *Technical data should be considered representative and should not be used for specification purposes.*

Coefficient of Thermal Expansion	Fractional < 1/16”
Temperature Use Limit	4500° F
Cured Shrinkage	Negligible
Coverage	100 ft^2 per gallon
Porosity	6-10%
Adhesion ASTM D3359	4B Classification w/<5% removal

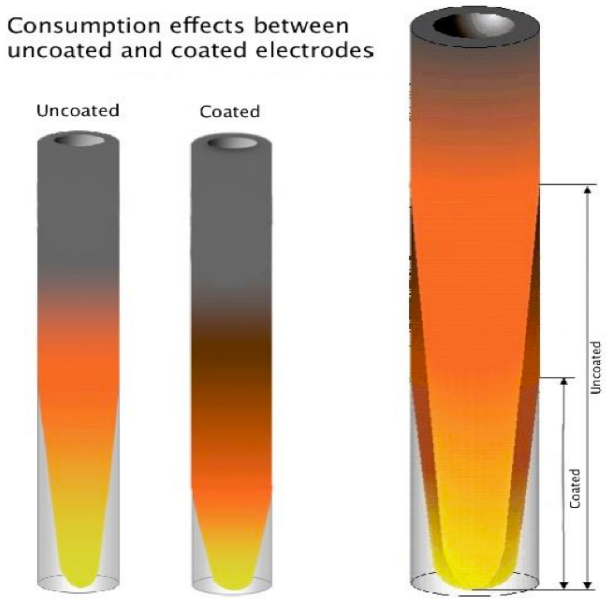

The physical and/or chemical properties and specifications of the product set forth above represent typical average results obtained in accordance with generally accepted standard test methods conducted under controlled conditions, and are subject to normal manufacturing variations. ITC reserves the right to modify the properties and specifications at any time without prior notice.

NO WARRANTY IS EXPRESSED OR IMPLIED REGARDING THE ACCURACY OF THIS INFORMATION, THE SUITABILITY OF THE PRODUCT FOR A PARTICULAR PURPOSE, OR THE RESULTS TO BE OBTAINED BY THE USE OF THE PRODUCT. USERS EXPRESSLY ASSUME ALL RISKS AND LIABILITIES ARISING FROM THE USE OF OR RELIANCE UPON THIS INFORMATION.

ITC International Technical Ceramics - P.O. Box 93030, Southlake, TX 76092 Tel: (817) 337-9889 Fax: (817) 337-3883