

Wonder AluminaS25 AFDP

Visual Hue Request: YELLOW/GREENISH

New Std Retrieve Std Store Std List Std

Instrument Setup: %R LAV SCI UV Cal

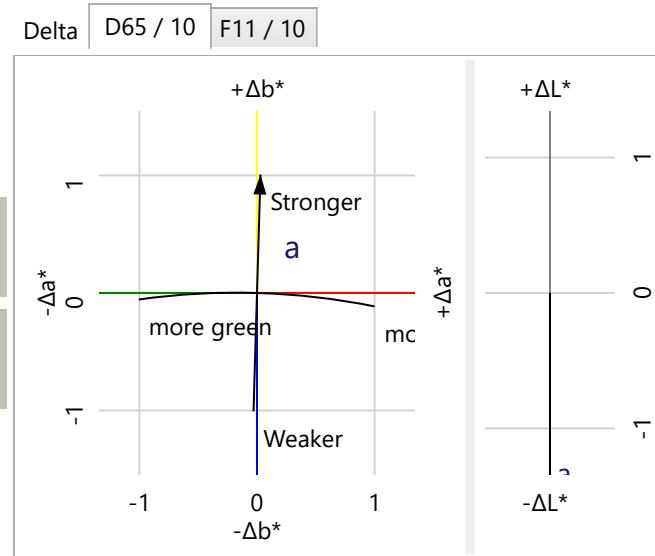
Date: 23-Oct-23 Time: 13:55:02

Batch Name 5 of 5**E/A/E0034 148989 DOM2400894 WONDER**

New Bat Retrieve Bat Store Bat List Bat

Instrument Setup: %R LAV SCI UV Cal

Date: 06-Jun-24 Time: 10:51:54

**Standard %R**

400-450nm	53.07	49.79	45.33	42.27	40.80	38.20
460-510nm	42.23	49.58	53.48	53.21	52.21	49.88
520-570nm	47.64	47.50	47.90	47.11	46.61	48.09
580-630nm	50.64	51.77	52.67	53.30	52.57	51.42
640-690nm	51.40	54.16	59.54	70.75	80.50	83.93
700nm	88.11					

CMC DE Pass/Fail Tolerance: 0.80**I:c Ratio: (2.00 1.00)****Batch Name**

	<u>III/Obs</u>	<u>DL*</u>	<u>Da*</u>	<u>Db*</u>	<u>DL*/ISL</u>	<u>DC*/cSC</u>	<u>DH*/SH</u>	<u>CMC DE</u>	<u>M.I.</u>	<u>P/F</u>	<u>Color</u>	<u>Comments</u>	
60017209 MFAO2405A/E0034 148989 DOM2400894 WONDER	D65 10 Deg	-1.28	0.29	0.46	-0.48	0.47	-0.37	0.77		Warn	too dark	too bright	too red
60017209 MFAO2405A/E0034 148989 DOM2400894 WONDER	F11 10 Deg	-1.22	-0.38	0.31	-0.46	0.22	0.66	0.83	0.67	Fail	too dark	too bright	too green