

**Warm ClayS25 AFDT**

Visual Hue Request: RED/YELLOWISH

New Std Retrieve Std Store Std List Std

Instrument Setup: %R LAV SCI UV Cal

Date: 21-Dec-23 Time: 06:16:08


Batch Name 3 of 3

**20963 159559 DOM2401217 WARM CLAY**

New Bat Retrieve Bat Store Bat List Bat

Instrument Setup: %R LAV SCI UV Cal

Date: 03-Sep-24 Time: 10:18:53

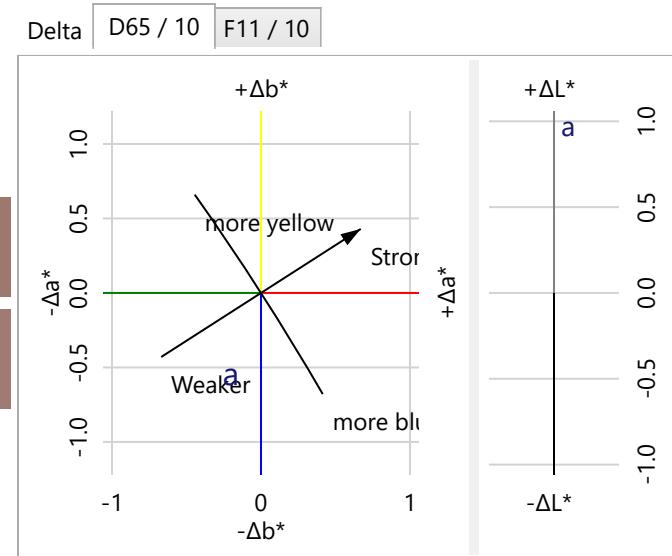

## Standard %R

400-450nm	29.99	25.35	21.77	18.84	16.59	15.31
460-510nm	14.79	14.79	15.84	17.67	18.59	18.41
520-570nm	17.85	17.65	17.67	18.18	19.23	21.04
580-630nm	23.67	26.46	28.90	30.49	31.67	33.52
640-690nm	36.55	40.92	45.78	52.94	59.62	63.76
700nm	68.84					

CMC DE Pass/Fail Tolerance: 0.80

I:c Ratio: ( 2.00 1.00 )

Batch Name70017368 24020963 159559 DOM2401217 WARM CLAY  
70017368 24020963 159559 DOM2401217 WARM CLAY

Single/All Zoom In Zoom Out CMC Plot Print Form

III/Obs	DL*	Da*	Db*	DL*/ISL	DC*/cSC	DH*/SH	CMC DE	M.I.	P/F	Color	Comments
D65 10 Deg	1.01	-0.21	-0.49	0.45	-0.28	-0.38	<b>0.65</b>		<b>Warn</b>	too light	too dull
F11 10 Deg	0.86	0.30	-0.02	0.38	0.15	-0.24	<b>0.47</b>	0.69	<b>Pass</b>	too light	too bright