Standard Name   155   of   155

↑ | Warm ClayS25 AFDT | ↓

Visual Hue Request: RED/YELLOWISH

| New Std | Retrieve Std | Store Std | List Std |

Instrument Setup: %R LAV SCI UV Cal
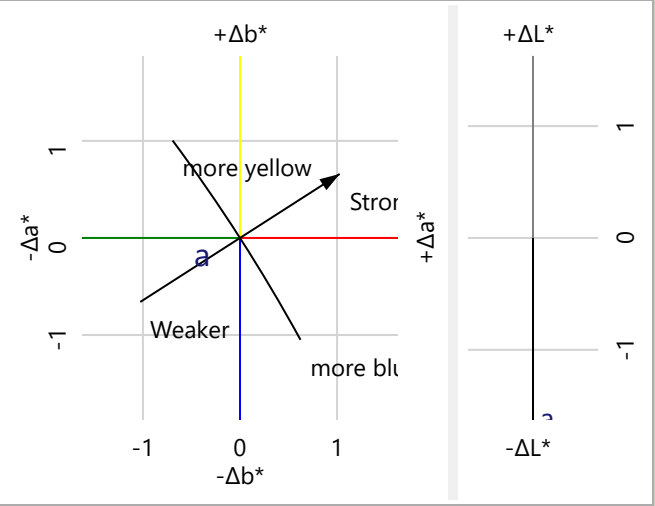
Date: 21-Dec-23   Time: 06:16:08

Batch Name   1   of   2

↑ | 700057955 POBB22407A/E2639 159311 [| ↓

| New Bat | Retrieve Bat | Store Bat | List Bat |

Instrument Setup: %R LAV SCI UV Cal

Date: 31-Jul-24   Time: 15:02:51

Delta | D65 / 10 | F11 / 10

| Single/All | Zoom In | Zoom Out | CMC Plot | Print Form |

DataColor TOOLS 2.8.1   S/N NO. 8823242

Standard %R

400-450nm	29.99	25.35	21.77	18.84	16.59	15.31
460-510nm	14.79	14.79	15.84	*17.67*	18.59	18.41
520-570nm	17.85	17.65	17.67	18.18	19.23	21.04
580-630nm	23.67	26.46	28.90	30.49	31.67	33.52
640-690nm	36.55	40.92	45.78	52.94	59.62	63.76
700nm	68.84					

CMC DE Pass/Fail Tolerance: 0.80

l:c Ratio: (2.00   1.00)

Batch Name	Ill/Obs	DL*	Da*	Db*	DL*/ISL	DC*/cSC	DH*/SH	CMC DE	M.I.	P/F		Color	Comments	
700057955 POBB22407A/E2639 159311 DOM2401194 WARM	D65 10 Deg	-1.55	-0.39	-0.10	-0.69	-0.25	0.16	**0.75**		**Warn**	too dark	too dull		too yellow
700057955 POBB22407A/E2639 159311 DOM2401194 WARM	F11 10 Deg	-1.69	0.15	0.42	-0.74	0.24	0.32	**0.84**	0.80	**Fail**	too dark	too bright		too yellow