1) Write the control signals of the single-bus processor below for the following instructions (be careful with the addressing modes).

a. (mem1) + (mem2) = R1

b. (mem1) - (R1) = (mem2)

c. Conditional Jump relative
(PC + offset in N and END in ~~N~~)

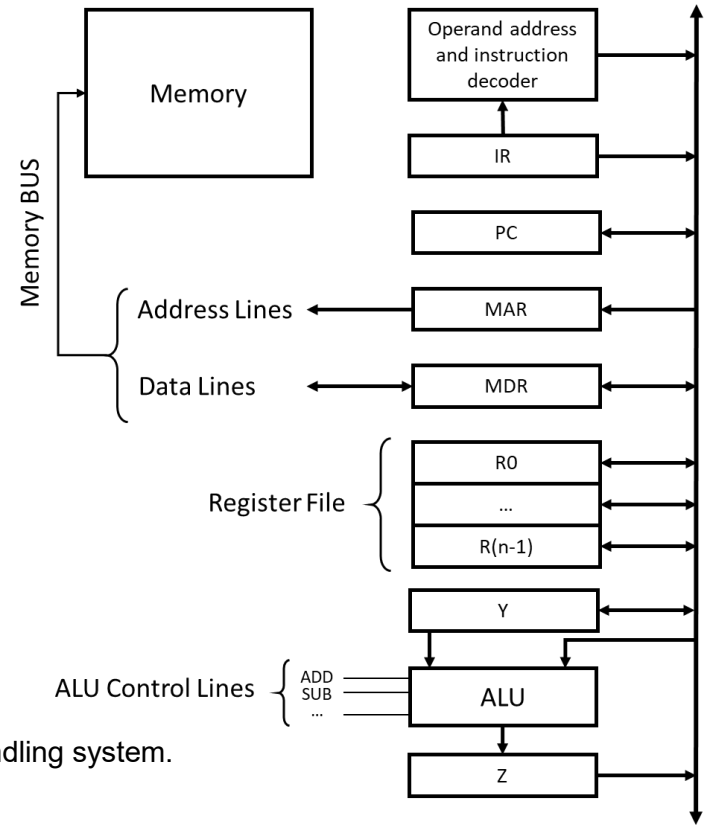

2) Answer the following questions:

a. Describe “BUS multiplexing”.

b. Describe “Daisy Chain” interrupt handling system.

3) Write RISC-V assembly code for the following equations (2 out of 3).

$$a)\ S = \sum_{k=1}^{n} k^2 = 1^2 + 2^2 + 3^2 + \cdots + n^2$$

$$b)\ S = k!\ = k \times (k-1) \times (k-2) \times \ldots \times 2 \times 1$$

$$c)\ S = \sum_{k=1}^{n} (-1)^{2k-1} k = -n + (n-1) - (n-2) + \cdots - 1$$

4) Following circuit is considered for a microprocessor which the microinstructions stored in instruction memory (also known as control memory) have a width of 26 bits. These microinstructions are broken down to three fields:

1) micro operation field (13 bits)
2) Next address field (X)
3) Status bits of MUX (8 bits)

Calculate number of bit in X and Y.
What is the size of the memory?

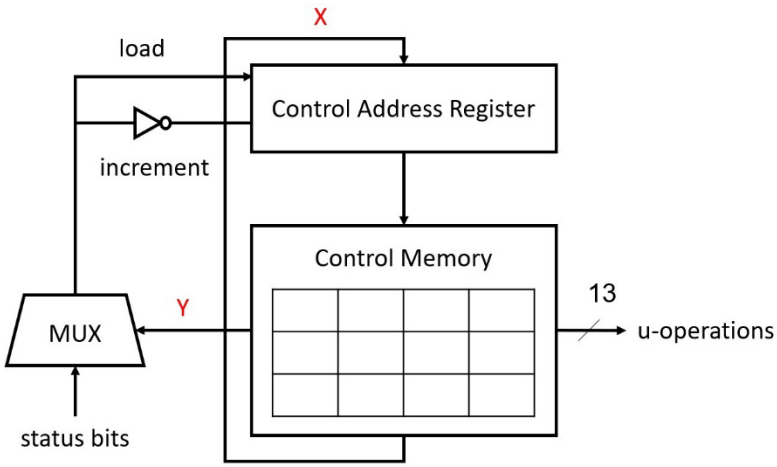

5) In the following problem, use a simple pipelined RISC architecture with a branch delay cycle. The architecture has pipelined functional units with the flowing execution cycles:

1. Floating point op: 3 cycles
2. Integer op: 1 cycles

The following table shows the minimum number of intervening cycles between the producer and consumer instructions to avoid stalls. Assume 0 intervening cycle for combinations not listed.

Instruction producing result	Instruction using result	Latency in clock cycles
FP ALU op	Another FP ALU op	2
FP ALU op	Store and move double	2
Load double	FP ALU op	1
Load double	Store double	0

The following code computes a 3-tap filter. R1 contains address of the next input to the filter, and the output overwrites the input for the iteration. R2 contains the loop counter. The tab values are contained in F10, F11, F12.

```
LOOP:   L.D     F0, 0(R1)   #load the filter input for the iteration
        MULT.D  F2, F1, F12 #multiply elements
        ADD.D   F0, F2, F0  #add elements
        MULT.D  F2, F1, F11
        MOV.D   F1, F0      #move value in F0 to F1
        MULT.D  F0, F0, F10
        ADD.D   F0, F0, F2
        S.D     F0, 0(R1)   #store the result
        ADDI    R1, R1, 8   #increment pointer, 8 bytes per DW
        BNEZ    R2, LOOP    #continue till all inputs are processed
        SUBI    R2, R2, 1   #decrement element count
```

a. How many cycles does the current code take for each iteration?

b. Rearrange the code without unrolling to achieve 2 less cycles per iteration. Show execution cycle next to each code line.

Bonus point) Consider a processor with the following specifications:

It is a Stack-Based processor, meaning that it does not have general-purpose registers and uses a stack for this purpose.

1. The capacity of the stack is 32 8-bit words.
2. The stack has three control inputs, namely TOS, POP, and PUSH. The PUSH input pushes the input data onto the top of the stack, while the POP input removes the data from the top of the stack. These two inputs change the stack pointer. The TOS input returns the contents of the top of the stack without changing the stack pointer.
3. Reading from the stack is done.
4. The data on the DataOut output remains stable until the next read operation (either POP or TOS). This means that once data is read from the stack and appears on the DataOut output, it will remain stable and available for use until the next read operation is performed.
5. Memory Size = 256 × 8 bits.
6. Two types of instructions:

Type A:

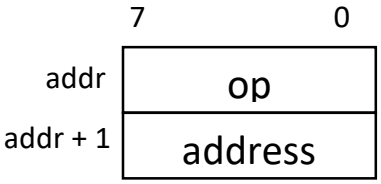

Type B:



For B-Type instructions which may need 2 operands (ADD, AND, SUB, OR), data will be gathered (POP) from the 2 top cells of stack and the output will be pushed on the top of the stack.

For B-Type instructions which may need 1 operand (NOT), data will be gathered (POP) from the top of stack and the output will be pushed on the top of the stack.

Operations of this processor is shown below (TOS = Top of Stack):

Mnemonic		Description	Opcode	Type
PUSH	adr-8	Push M[adr-8] on top of stack	00000001	A
POP	adr-8	Pop from top of stack into M[adr-8]	00000010	A
JMP	adr-8	PC ← adr-8	00000100	A
BZ	adr-8	If (TOS = 0) PC ← adr-8	00001000	A
ADD	-		10000000	B
SUB	-		10000001	B
AND	-		10000010	B
OR	-		10000011	B
NOT	-		10000100	B
NOP	-	No Operation	10000101	B

Operation	y
000	In1 + In2
001	In1 - In2
010	In1 & In2
011	In1 | In2
100	Not In1
101	In2 + 1
110	In1
111	In2

ALU Truth table

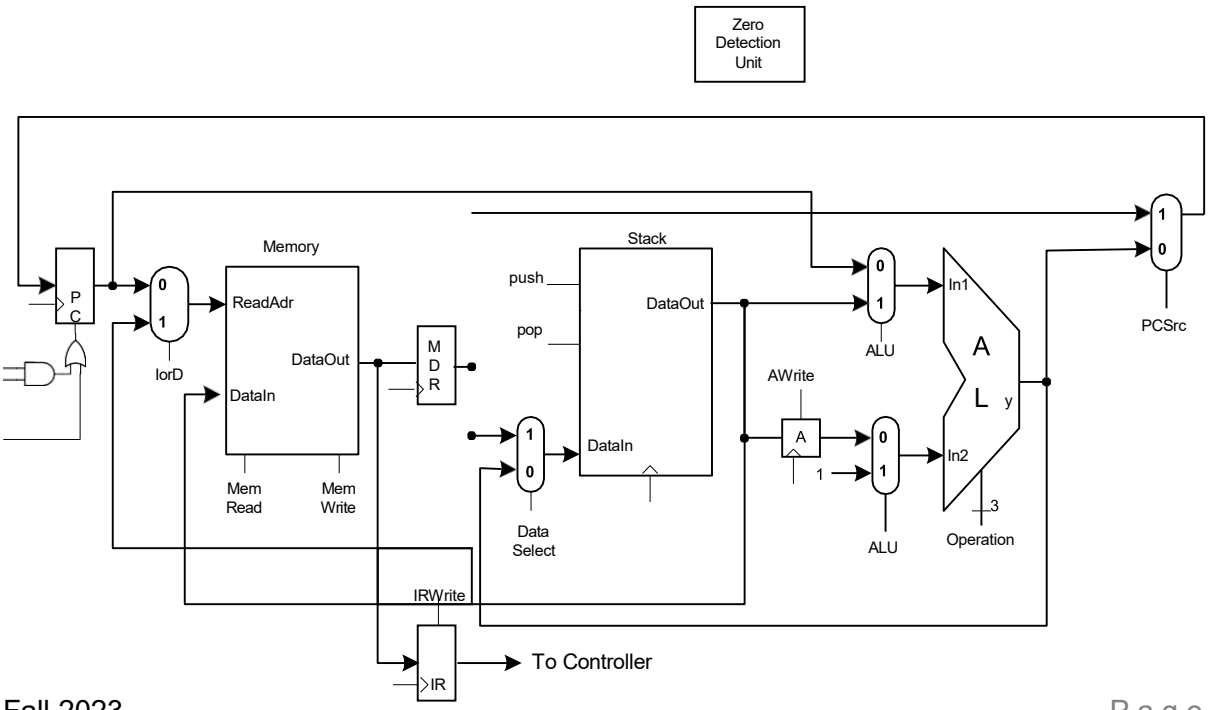

a) Show every step of fetching an instruction. Your answer must include number of cycles needed and actions taken in each cycle.

b) Show every step of `BZ adr` instruction. Your answer must include number of cycles needed and actions taken in each cycle. (Assume fetching is process is finished)

c) Show every step of `ADD` instruction. Your answer must include number of cycles needed and actions taken in each cycle. (Assume fetching is process is finished)

If you have any questions regarding this assignment, feel free to contact us.

Please submit your homework, simulations and projects in the following format:

Name_StudentNumber_HW1 (BillGates_12345678_HW1)

Good Luck!

RISC-V Reference Data Card ("Green Card") 1. Pull along perforation to separate card 2. Fold bottom side (columns 3 and 4) together

RISC-V

Reference Data

①

RV64I BASE INTEGER INSTRUCTIONS, in alphabetical order

MNEMONIC	FMT	NAME	DESCRIPTION (in Verilog)	NOTE
add,addw	R	ADD (Word)	R[rd] = R[rs1] + R[rs2]	1)
addi,addiw	I	ADD Immediate (Word)	R[rd] = R[rs1] + imm	1)
and	R	AND	R[rd] = R[rs1] & R[rs2]	
andi	I	AND Immediate	R[rd] = R[rs1] & imm	
auipc	U	Add Upper Immediate to PC	R[rd] = PC + {imm, 12'b0}	
beq	SB	Branch EQual	if(R[rs1]==R[rs2) PC=PC+{imm,1b'0}	
bge	SB	Branch Greater than or Equal	if(R[rs1]>=R[rs2) PC=PC+{imm,1b'0}	
bgeu	SB	Branch ≥ Unsigned	if(R[rs1]>=R[rs2) PC=PC+{imm,1b'0}	2)
blt	SB	Branch Less Than	if(R[rs1]<R[rs2) PC=PC+{imm,1b'0}	
bltu	SB	Branch Less Than Unsigned	if(R[rs1]<R[rs2) PC=PC+{imm,1b'0}	2)
bne	SB	Branch Not Equal	if(R[rs1]!=R[rs2) PC=PC+{imm,1b'0}	
csrrc	I	Cont./Stat.RegRead&Clear	R[rd] = CSR;CSR = CSR & ~R[rs1]	
csrrci	I	Cont./Stat.RegRead&Clear Imm	R[rd] = CSR;CSR = CSR & ~imm	
csrrs	I	Cont./Stat.RegRead&Set	R[rd] = CSR; CSR = CSR | R[rs1]	
csrrsi	I	Cont./Stat.RegRead&Set Imm	R[rd] = CSR; CSR = CSR | imm	
csrrw	I	Cont./Stat.RegRead&Write	R[rd] = CSR; CSR = R[rs1]	
csrrwi	I	Cont./Stat.Reg Read&Write Imm	R[rd] = CSR; CSR = imm	
ebreak	I	Environment BREAK	Transfer control to debugger	
ecall	I	Environment CALL	Transfer control to operating system	
fence	I	Synch thread	Synchronizes threads	
fence.i	I	Synch Instr & Data	Synchronizes writes to instruction stream	
jal	UJ	Jump & Link	R[rd] = PC+4; PC = PC + {imm,1b'0}	
jalr	I	Jump & Link Register	R[rd] = PC+4; PC = R[rs1]+imm	3)
lb	I	Load Byte	R[rd] = {56'bM[](7),M[R[rs1]+imm](7:0)}	4)
lbu	I	Load Byte Unsigned	R[rd] = {56'b0,M[R[rs1]+imm](7:0)}	
ld	I	Load Doubleword	R[rd] = M[R[rs1]+imm](63:0)	
lh	I	Load Halfword	R[rd] = {48'bM[](15),M[R[rs1]+imm](15:0)}	4)
lhu	I	Load Halfword Unsigned	R[rd] = {48'b0,M[R[rs1]+imm](15:0)}	
lui	U	Load Upper Immediate	R[rd] = {32b'imm<31>, imm, 12'b0}	
lw	I	Load Word	R[rd] = {32'bM[](31),M[R[rs1]+imm](31:0)}	4)
lwu	I	Load Word Unsigned	R[rd] = {32'b0,M[R[rs1]+imm](31:0)}	
or	R	OR	R[rd] = R[rs1] | R[rs2]	
ori	I	OR Immediate	R[rd] = R[rs1] | imm	
sb	S	Store Byte	M[R[rs1]+imm](7:0) = R[rs2](7:0)	
sd	S	Store Doubleword	M[R[rs1]+imm](63:0) = R[rs2](63:0)	
sh	S	Store Halfword	M[R[rs1]+imm](15:0) = R[rs2](15:0)	
sll,sllw	R	Shift Left (Word)	R[rd] = R[rs1] << R[rs2]	1)
slli,slliw	I	Shift Left Immediate (Word)	R[rd] = R[rs1] << imm	1)
slt	R	Set Less Than	R[rd] = (R[rs1] < R[rs2]) ? 1 : 0	
slti	I	Set Less Than Immediate	R[rd] = (R[rs1] < imm) ? 1 : 0	
sltiu	I	Set < Immediate Unsigned	R[rd] = (R[rs1] < imm) ? 1 : 0	2)
sltu	R	Set Less Than Unsigned	R[rd] = (R[rs1] < R[rs2]) ? 1 : 0	2)
sra,sraw	R	Shift Right Arithmetic (Word)	R[rd] = R[rs1] >> R[rs2]	1,5)
srai,sraiw	I	Shift Right Arith Imm (Word)	R[rd] = R[rs1] >> imm	1,5)
srl,srlw	R	Shift Right (Word)	R[rd] = R[rs1] >> R[rs2]	1)
srli,srliw	I	Shift Right Immediate (Word)	R[rd] = R[rs1] >> imm	1)
sub,subw	R	SUBtract (Word)	R[rd] = R[rs1] – R[rs2]	1)
sw	S	Store Word	M[R[rs1]+imm](31:0) = R[rs2](31:0)	
xor	R	XOR	R[rd] = R[rs1] ^ R[rs2]	
xori	I	XOR Immediate	R[rd] = R[rs1] ^ imm	

Notes: 1) The Word version only operates on the rightmost 32 bits of a 64-bit registers
2) Operation assumes unsigned integers (instead of 2's complement)
3) The least significant bit of the branch address in jalr is set to 0
4) (signed) Load instructions extend the sign bit of data to fill the 64-bit register
5) Replicates the sign bit to fill in the leftmost bits of the result during right shift
6) Multiply with one operand signed and one unsigned
7) The Single version does a single-precision operation using the rightmost 32 bits of a 64-bit F register
8) Classify writes a 10-bit mask to show which properties are true (e.g., –inf, -0,+0, +inf, denorm, ...)
9) Atomic memory operation; nothing else can interpose itself between the read and the write of the memory location
The immediate field is sign-extended in RISC-V

②

ARITHMETIC CORE INSTRUCTION SET

RV64M Multiply Extension

MNEMONIC	FMT	NAME	DESCRIPTION (in Verilog)	NOTE
mul,mulw	R	MULtiply (Word)	R[rd] = (R[rs1] * R[rs2])(63:0)	1)
mulh	R	MULtiply High	R[rd] = (R[rs1] * R[rs2])(127:64)	
mulhu	R	MULtiply High Unsigned	R[rd] = (R[rs1] * R[rs2])(127:64)	2)
mulhsu	R	MULtiply upper Half Sign/Uns	R[rd] = (R[rs1] * R[rs2])(127:64)	6)
div,divw	R	DIVide (Word)	R[rd] = (R[rs1] / R[rs2])	1)
divu	R	DIVide Unsigned	R[rd] = (R[rs1] / R[rs2])	2)
rem,remw	R	REMainder (Word)	R[rd] = (R[rs1] % R[rs2])	1)
remu,remuw	R	REMainder Unsigned (Word)	R[rd] = (R[rs1] % R[rs2])	1,2)

RV64F and RV64D Floating-Point Extensions

fld,flw	I	Load (Word)	F[rd] = M[R[rs1]+imm]	1)
fsd,fsw	S	Store (Word)	M[R[rs1]+imm] = F[rd]	1)
fadd.s,fadd.d	R	ADD	F[rd] = F[rs1] + F[rs2]	7)
fsub.s,fsub.d	R	SUBtract	F[rd] = F[rs1] – F[rs2]	7)
fmul.s,fmul.d	R	MULtiply	F[rd] = F[rs1] * F[rs2]	7)
fdiv.s,fdiv.d	R	DIVide	F[rd] = F[rs1] / F[rs2]	7)
fsqrt.s,fsqrt.d	R	SQuare RooT	F[rd] = sqrt(F[rs1])	7)
fmadd.s,fmadd.d	R	Multiply-ADD	F[rd] = F[rs1] * F[rs2] + F[rs3]	7)
fmsub.s,fmsub.d	R	Multiply-SUBtract	F[rd] = F[rs1] * F[rs2] - F[rs3]	7)
fnmadd.s,fnmadd.d	R	Negative Multiply-ADD	F[rd] = –(F[rs1] * F[rs2] + F[rs3])	7)
fnmsub.s,fnmsub.d	R	Negative Multiply-SUBtract	F[rd] = –(F[rs1] * F[rs2] – F[rs3])	7)
fsgnj.s,fsgnj.d	R	SiGN source	F[rd] = { F[rs2]<63>,F[rs1]<62:0>}	7)
fsgnjn.s,fsgnjn.d	R	Negative SiGN source	F[rd] = { (~F[rs2]<63>), F[rs1]<62:0>}	7)
fsgnjx.s,fsgnjx.d	R	Xor SiGN source	F[rd] = {F[rs2]<63>^F[rs1]<63>, F[rs1]<62:0>}	7)
fmin.s,fmin.d	R	MINimum	F[rd] = (F[rs1] < F[rs2]) ? F[rs1] : F[rs2]	7)
fmax.s,fmax.d	R	MAXimum	F[rd] = (F[rs1] > F[rs2]) ? F[rs1] : F[rs2]	7)
feq.s,feq.d	R	Compare Float EQual	R[rd] = (F[rs1]== F[rs2]) ? 1 : 0	7)
flt.s,flt.d	R	Compare Float Less Than	R[rd] = (F[rs1]< F[rs2]) ? 1 : 0	7)
fle.s,fle.d	R	Compare Float Less than or =	R[rd] = (F[rs1]<= F[rs2]) ? 1 : 0	7)
fclass.s,fclass.d	R	Classify Type	R[rd] = class(F[rs1])	7,8)
fmv.s.x,fmv.d.x	R	Move from Integer	F[rd] = R[rs1]	7)
fmv.x.s,fmv.x.d	R	Move to Integer	R[rd] = F[rs1]	7)
fcvt.s.d	R	Convert to SP from DP	F[rd] = single(F[rs1])	
fcvt.d.s	R	Convert to DP from SP	F[rd] = double(F[rs1])	
fcvt.s.w,fcvt.d.w	R	Convert from 32b Integer	F[rd] = float(R[rs1](31:0))	7)
fcvt.s.l,fcvt.d.l	R	Convert from 64b Integer	F[rd] = float(R[rs1](63:0))	7)
fcvt.s.wu,fcvt.d.wu	R	Convert from 32b Int Unsigned	F[rd] = float(R[rs1](31:0))	2,7)
fcvt.s.lu,fcvt.d.lu	R	Convert from 64b Int Unsigned	F[rd] = float(R[rs1](63:0))	2,7)
fcvt.w.s,fcvt.w.d	R	Convert to 32b Integer	R[rd](31:0) = integer(F[rs1])	7)
fcvt.l.s,fcvt.l.d	R	Convert to 64b Integer	R[rd](63:0) = integer(F[rs1])	7)
fcvt.wu.s,fcvt.wu.d	R	Convert to 32b Int Unsigned	R[rd](31:0) = integer(F[rs1])	2,7)
fcvt.lu.s,fcvt.lu.d	R	Convert to 64b Int Unsigned	R[rd](63:0) = integer(F[rs1])	2,7)

RV64A Atomtic Extension

amoadd.w,amoadd.d	R	ADD	R[rd] = M[R[rs1]], M[R[rs1]] = M[R[rs1]] + R[rs2]	9)
amoand.w,amoand.d	R	AND	R[rd] = M[R[rs1]], M[R[rs1]] = M[R[rs1]] & R[rs2]	9)
amomax.w,amomax.d	R	MAXimum	R[rd] = M[R[rs1]], if (R[rs2] > M[R[rs1]]) M[R[rs1]] = R[rs2]	9)
amomaxu.w,amomaxu.d	R	MAXimum Unsigned	R[rd] = M[R[rs1]], if (R[rs2] > M[R[rs1]]) M[R[rs1]] = R[rs2]	2,9)
amomin.w,amomin.d	R	MINimum	R[rd] = M[R[rs1]], if (R[rs2] < M[R[rs1]]) M[R[rs1]] = R[rs2]	9)
amominu.w,amominu.d	R	MINimum Unsigned	R[rd] = M[R[rs1]], if (R[rs2] < M[R[rs1]]) M[R[rs1]] = R[rs2]	2,9)
amoor.w,amoor.d	R	OR	R[rd] = M[R[rs1]], M[R[rs1]] = M[R[rs1]] | R[rs2]	9)
amoswap.w,amoswap.d	R	SWAP	R[rd] = M[R[rs1]], M[R[rs1]] = R[rs2]	9)
amoxor.w,amoxor.d	R	XOR	R[rd] = M[R[rs1]], M[R[rs1]] = M[R[rs1]] ^ R[rs2]	9)
lr.w,lr.d	R	Load Reserved	R[rd] = M[R[rs1]], reservation on M[R[rs1]]	
sc.w,sc.d	R	Store Conditional	if reserved, M[R[rs1]] = R[rs2], R[rd] = 0; else R[rd] = 1	

CORE INSTRUCTION FORMATS

	31 27	26 25	24 20	19 15	14 12	11 7	6 0
R	funct7		rs2	rs1	funct3	rd	Opcode
I	imm[11:0]			rs1	funct3	rd	Opcode
S	imm[11:5]		rs2	rs1	funct3	imm[4:0]	opcode
SB	imm[12|10:5]		rs2	rs1	funct3	imm[4:1|11]	opcode
U	imm[31:12]					rd	opcode
UJ	imm[20|10:1|11|19:12]					rd	opcode

PSEUDO INSTRUCTIONS ③

MNEMONIC	NAME	DESCRIPTION	USES
beqz	Branch = zero	if(R[rs1]==0) PC=PC+{imm,1b'0}	beq
bnez	Branch ≠ zero	if(R[rs1]!=0) PC=PC+{imm,1b'0}	bne
fabs.s,fabs.d	Absolute Value	F[rd] = (F[rs1]< 0) ? –F[rs1] : F[rs1]	fsgnx
fmv.s,fmv.d	FP Move	F[rd] = F[rs1]	fsgnj
fneg.s,fneg.d	FP negate	F[rd] = –F[rs1]	fsgnjn
j	Jump	PC = {imm,1b'0}	jal
jr	Jump register	PC = R[rs1]	jalr
la	Load address	R[rd] = address	auipc
li	Load imm	R[rd] = imm	addi
mv	Move	R[rd] = R[rs1]	addi
neg	Negate	R[rd] = –R[rs1]	sub
nop	No operation	R[0] = R[0]	addi
not	Not	R[rd] = ~R[rs1]	xori
ret	Return	PC = R[1]	jalr
seqz	Set = zero	R[rd] = (R[rs1]== 0) ? 1 : 0	sltiu
snez	Set ≠ zero	R[rd] = (R[rs1]!= 0) ? 1 : 0	sltu

OPCODES IN NUMERICAL ORDER BY OPCODE

MNEMONIC	FMT	OPCODE	FUNCT3	FUNCT7 OR IMM	HEXADECIMAL
lb	I	0000011	000		03/0
lh	I	0000011	001		03/1
lw	I	0000011	010		03/2
ld	I	0000011	011		03/3
lbu	I	0000011	100		03/4
lhu	I	0000011	101		03/5
lwu	I	0000011	110		03/6
fence	I	0001111	000		0F/0
fence.i	I	0001111	001		0F/1
addi	I	0010011	000		13/0
slli	I	0010011	001	0000000	13/1/00
slti	I	0010011	010		13/2
sltiu	I	0010011	011		13/3
xori	I	0010011	100		13/4
srli	I	0010011	101	0000000	13/5/00
srai	I	0010011	101	0100000	13/5/20
ori	I	0010011	110		13/6
andi	I	0010011	111		13/7
auipc	U	0010111			17
addiw	I	0011011	000		1B/0
slliw	I	0011011	001	0000000	1B/1/00
srliw	I	0011011	101	0000000	1B/5/00
sraiw	I	0011011	101	0100000	1B/5/20
sb	S	0100011	000		23/0
sh	S	0100011	001		23/1
sw	S	0100011	010		23/2
sd	S	0100011	011		23/3
add	R	0110011	000	0000000	33/0/00
sub	R	0110011	000	0100000	33/0/20
sll	R	0110011	001	0000000	33/1/00
slt	R	0110011	010	0000000	33/2/00
sltu	R	0110011	011	0000000	33/3/00
xor	R	0110011	100	0000000	33/4/00
srl	R	0110011	101	0000000	33/5/00
sra	R	0110011	101	0100000	33/5/20
or	R	0110011	110	0000000	33/6/00
and	R	0110011	111	0000000	33/7/00
lui	U	0110111			37
addw	R	0111011	000	0000000	3B/0/00
subw	R	0111011	000	0100000	3B/0/20
sllw	R	0111011	001	0000000	3B/1/00
srlw	R	0111011	101	0000000	3B/5/00
sraw	R	0111011	101	0100000	3B/5/20
beq	SB	1100011	000		63/0
bne	SB	1100011	001		63/1
blt	SB	1100011	100		63/4
bge	SB	1100011	101		63/5
bltu	SB	1100011	110		63/6
bgeu	SB	1100011	111		63/7
jalr	I	1100111	000		67/0
jal	UJ	1101111			6F
ecall	I	1110011	000	000000000000	73/0/000
ebreak	I	1110011	000	000000000001	73/0/001
CSRRW	I	1110011	001		73/1
CSRRS	I	1110011	010		73/2
CSRRC	I	1110011	011		73/3
CSRRWI	I	1110011	101		73/5
CSRRSI	I	1110011	110		73/6
CSRRCI	I	1110011	111		73/7

REGISTER NAME, USE, CALLING CONVENTION ④

REGISTER	NAME	USE	SAVER
x0	zero	The constant value 0	N.A.
x1	ra	Return address	Caller
x2	sp	Stack pointer	Callee
x3	gp	Global pointer	--
x4	tp	Thread pointer	--
x5–x7	t0–t2	Temporaries	Caller
x8	s0/fp	Saved register/Frame pointer	Callee
x9	s1	Saved register	Callee
x10–x11	a0–a1	Function arguments/Return values	Caller
x12–x17	a2–a7	Function arguments	Caller
x18–x27	s2–s11	Saved registers	Callee
x28–x31	t3–t6	Temporaries	Caller
f0–f7	ft0–ft7	FP Temporaries	Caller
f8–f9	fs0–fs1	FP Saved registers	Callee
f10–f11	fa0–fa1	FP Function arguments/Return values	Caller
f12–f17	fa2–fa7	FP Function arguments	Caller
f18–f27	fs2–fs11	FP Saved registers	Callee
f28–f31	ft8–ft11	R[rd] = R[rs1] + R[rs2]	Caller

IEEE 754 FLOATING-POINT STANDARD

$(-1)^S \times (1 + \text{Fraction}) \times 2^{(\text{Exponent} - \text{Bias})}$

where Half-Precision Bias = 15, Single-Precision Bias = 127, Double-Precision Bias = 1023, Quad-Precision Bias = 16383

IEEE Half-, Single-, Double-, and Quad-Precision Formats:

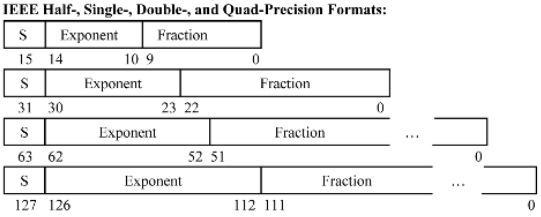

MEMORY ALLOCATION



STACK FRAME



SIZE PREFIXES AND SYMBOLS

SIZE	PREFIX	SYMBOL	SIZE	PREFIX	SYMBOL
10^3	Kilo-	K	2^{10}	Kibi-	Ki
10^6	Mega-	M	2^{20}	Mebi-	Mi
10^9	Giga-	G	2^{30}	Gibi-	Gi
10^{12}	Tera-	T	2^{40}	Tebi-	Ti
10^{15}	Peta-	P	2^{50}	Pebi-	Pi
10^{18}	Exa-	E	2^{60}	Exbi-	Ei
10^{21}	Zetta-	Z	2^{70}	Zebi-	Zi
10^{24}	Yotta-	Y	2^{80}	Yobi-	Yi
10^{-3}	milli-	m	10^{-15}	femto-	f
10^{-6}	micro-	μ	10^{-18}	atto-	a
10^{-9}	nano-	n	10^{-21}	zepto-	z
10^{-12}	pico-	p	10^{-24}	yocto-	y

RISC-V Reference Data Card ("Green Card") 1. Pull along perforation to separate card 2. Fold bottom side (columns 3 and 4) together