ALFAJER


ALFAJER Group Ltd





أبواب لفّافة محشوة بفوم كثافة عالية

يصل عرضها حتى ١٢ متر معززة
بشهادات فحوصات عالمية









P 80


أبواب لفّافة محشوة بفوم كثافة عالية

Roller shutter made of:
a) pre-painted aluminum panel, 0,4mm thick and 80 mm wide or
b) steel, (from 0.4 - 0.7) thick and 80mm wide.

The interior consists of ecological polyurethane, thickness 13mm, density 80kg/m², thermal resistance rate 3,8 W/(m²·K).
It combines high strength and security standards, low noise during operation, thermal insulation, sound insulation and perfect finishing.
Type P 80 is delivered electrostatically painted in the shades of the main color index, even in wood imitation.

PROFILE A:
ALUMINUM
DIMENSION:
80mm
THICKNESS:
0,5mm

PROFILE B:
STEEL
DIMENSION:
80mm
THICKNESS:
0,5mm

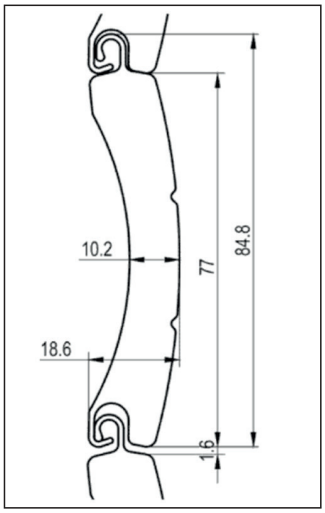

TECHNICAL SPECIFICATIONS

MATERIALS	ALUMINIUM	STEEL
FINISH	PREPAINTED	GALVANIZED PAINTED
PROFILE HIGHT	80 mm	80 mm
MAX.DIMENSION	5000 mm X 5000 mm	8000 mm x 8000 mm
WIND RESISTANCE	CLASS 2 According to the UNI EN 12424	CLASS 4 According to the UNI EN 12424
THERMAL RESISTANCE	4,00 W/(m²·K)	3,80 W/(m²·K)



Special polyamide cap at profile ends that reduces friction and noise.



Ability to incorporate special glazing made of transparent plastic material for lighting and visual communication with the interior.







ALFAJER
ALFAJER Group Ltd

Amman - Jordan
Tel . + 962 6 4163020 - Fax : + 962 6 4160134
www.al-fajergroup.com