


ITEM	DESCRIPTION
1	Cubis AX-S B125 Concrete Infill Cover
2	Cable Management Kit
3	Type 1 MOT
4	40mm Dry Lean Mix Concrete
5	10mm Sand & Cement (Drymix)
6	150x100mm Concrete Plinth
7	610x445x600mm Fortress Chamber
8	90mm Ducting

Notes.

- 1. END DUCTS TO BE IN LINE
- WHERE POSSIBLE DUCTS TO BE POSITIONED NO LESS THAN 75MM FROM SIDE WALLS & 100MM FROM BASE
- CHAMBER SIDE WALLS TO BE BACK FILLED MINIMUM 150MM COMPACTED TYPE 1 MOT

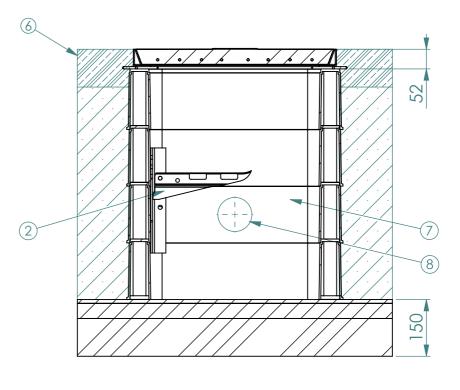

SECTION B-B



CUB

	Copyright of Cubis. No part of this
	document may be
	communicated, copied or used
IS l	without prior permission of Cubis.
ן כו	

pyright of Cubis. No part of this document may be	Date
mmunicated, copied or used hout prior permission of Cubis.	Drawı
www.Cubis-Systems.com	Appr

е	06/09/18	Third Angle Projection
	0	rrojechori
٧n	СН	
or.	СН	Weight

	Мс
	Finis
. kg	Toler Othe

5	Mate	erial			
	Finish				DIMS
	Tolerar Otherw	ice un vise Sta	less ated	+1,-1	mm

	TITLE Gigaclear Footway 2 Fortress Chamber & AX-S- Cover - Concrete Plinth					
		1	00101 001101			
	SIZE	DWG NO		SHEET 1 OF 1	REV	
	А3		16652 - 01			Re

	//			
	//			
	//			
	//	·		
ev.	Date	Revision History: Description	Drwn	An