



- 1 - Concrete surround to be 150mm wide & 100mm deep minimum.
- 2 - Rebar to be 10mm minimum, includes 4No. straights & 4No. corner pieces, to be tied together.
- 3 - Clear opening & external dimensions to be made to suit footway chambers of the following clear opening sizes:
  - FW2 - 610x445mm
  - FW4 - 915x445mm
  - FW6 - 1310x610mm
  - FW10 - 2300x750mm

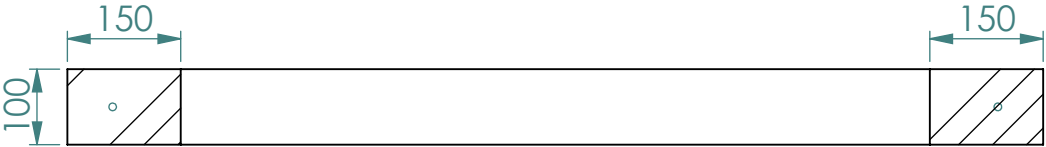


SECTION B-B

SECTION A-A

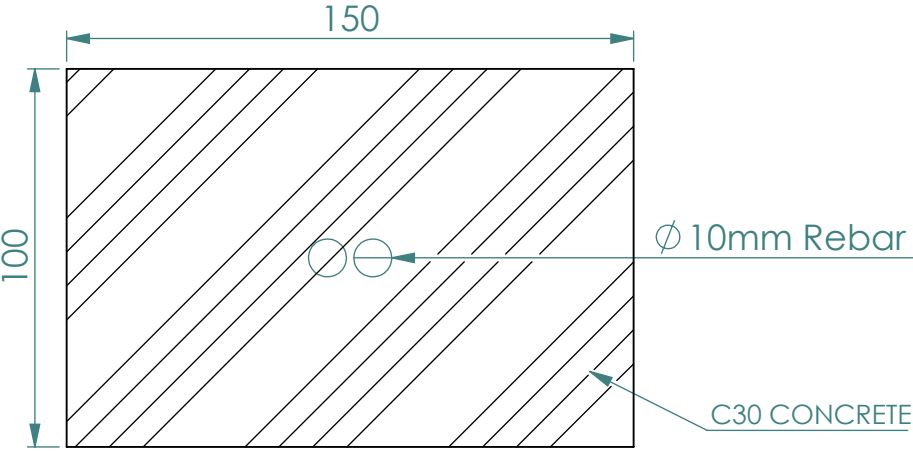

Copyright of Cubis. No part of this document may be communicated, copied or used without prior permission of Cubis.  
[www.Cubis-Systems.com](http://www.Cubis-Systems.com)

Date	23/08/18	Third Angle Projection		Material		Concrete		TITLE Gigaclear Concrete Surround for Footway Chambers in Verge				.	--/--/--	.	.			
Drawn	CH			Finish	Concrete		DIMS					.	--/--/--	.	.			
Appr.	CH	Weight	153.22 kg	Tolerance unless Otherwise Stated		+1,-1	mm	SIZE A3	DWG NO 16523		SHEET 1 OF 1	REV .	Rev	Date	Revision History: Description		Drwn	Appr