



| ITEM | DESCRIPTION                              |
|------|--|
| 1    | Cubis AX-S B125 Concrete Infill Cover    |
| 2    | Cable Management Kit                     |
| 3    | Type 1 MOT                               |
| 4    | 40mm Dry Lean Mix Concrete               |
| 5    | 10mm Sand & Cement (Drymix)              |
| 6    | Soakaway                                 |
| 7    | Sump Grate - ACSD00-02450245             |
| 8    | 150x100mm Concrete Plinth                |
| 9    | 2300x750x600mm Ultima Connect<br>Chamber |
| 10   | 90mm Ducting                             |

## Notes.

- END DUCTS TO BE IN LINE
- WHERE POSSIBLE DUCTS TO BE POSITIONED NO LESS THAN 75MM FROM SIDE WALLS & 100MM FROM BASE
- CHAMBER SIDE WALLS TO BE BACK FILLED MINIMUM 150MM COMPACTED TYPE 1 MOT

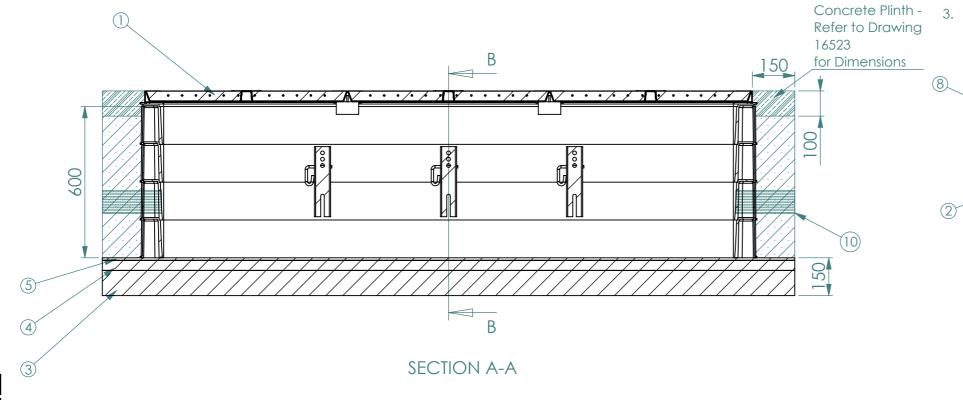

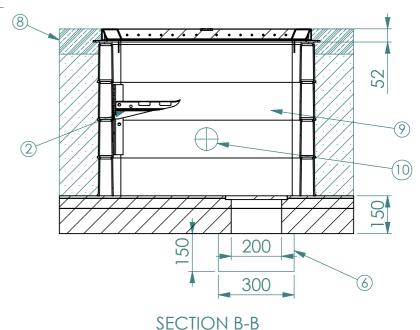



Copyright of Cubis. No part of this document may be communicated, copied or used without prior permission of Cubis. **CUBIS** www.Cubis-Systems.com

Third Angle 07/09/18 Date Projection Drawn СН Weight СН Appr.

. kg

Material inish DIMS Tolerance unless Otherwise Stated +1,-1 mm TITLE Gicaclear Footway 10 Ultima Chamber & AX-S Cover - Asphalt Surface SIZE DWG NO SHEET 1 OF 1 REV 16652 - 04 А3 Rev

|                | //   |                               |      |     |
|----------------|------|-------------------------------|------|-----|
|                | //   |                               |      |     |
|                | //   |                               |      |     |
|                | //   |                               |      |     |
| ٧ <del>٠</del> | Date | Revision History: Description | Drwn | Apr |