


SECTION B-B



SECTION D-D

BAR MARK 28 - CHAMFER BARS  
OMITTED FOR CLARITY REFER TO DRAWING  
SHT. 2-7 of 8 FOR BAR SPACING/POSITION

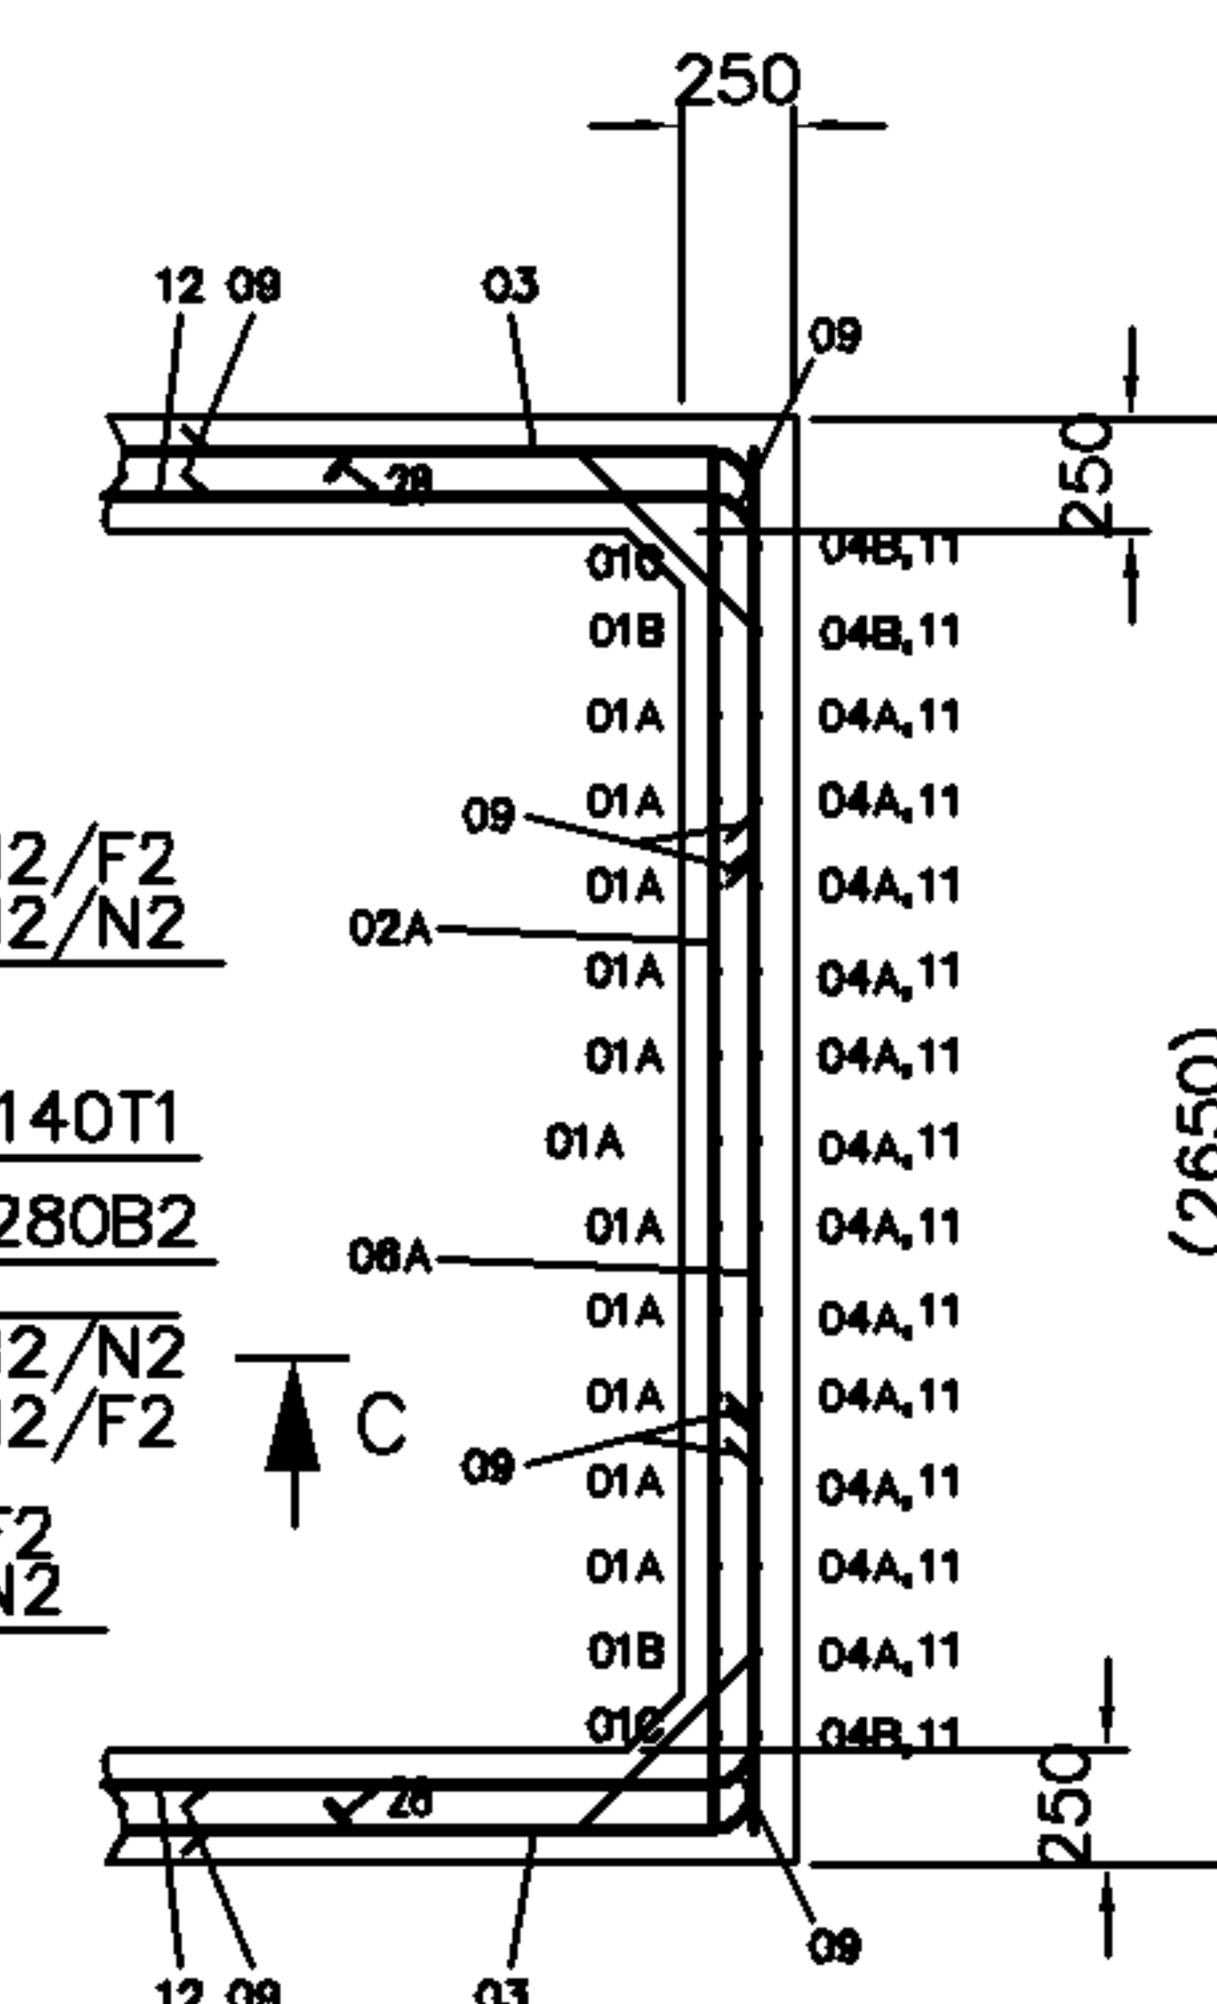

1. THIS DRAWING TO BE READ IN CONJUNCTION WITH ALL OTHER DRAWINGS, DOCUMENTATION AND SPECIFICATIONS RELATING TO THIS MANHOLE STRUCTURE TYPE CONSTRUCTION
2. REINFORCEMENT TO BE GRADE B500B OR B500C CONFORMING TO BS4449: 2005 (REFER CLAUSE 1712 SHW).
3. BAR SCHEDULE AND BENDING TO CONFORM TO BS8666.
4. MINIMUM COVER 55mm TO ANY CONCRETE FACE PROPRIETARY APPROVED SPACERS TO BE UTILISED.
5. BARS INTERSECTING HOLES TO BE CUT ON SITE AND TRIMMED TO CN13916
6. ADDITIONAL BARS MAY BE UTILISED TO TIE / SUPPORT MAIN BARS AS REQUIRED.
7. MAX BAR SPACING TO BE 150mm.



No. OF BARS	
TYPE OF STEEL	
DIA OF BARS	
BAR MARK	
SPACING	

BAR LOCATION	
FAR FACE OUTER LAYER	- F1
FAR FACE SECOND LAYER	- F2
NEAR FACE OUTER LAYER	- N1
NEAR FACE SECOND LAYER	- N2
BOTTOM FACE OUTER LAYER	- B1
BOTTOM FACE SECOND LAYER	- B2
TOP FACE OUTER LAYER	- T1
TOP FACE SECOND LAYER	- T2