


NOTES: -

1. CONCRETE TO BE GRADE MIN. C32/40.
2. RESIN PACK 6B BEFORE POURING IN, THE INTERNAL SURFACE OF THE CABINET BASE MUST BE CLEANED AND THE COMPOUND PAINTED ON TO A HEIGHT OF 40mm. QUANTITY MAX. 4 TINS.

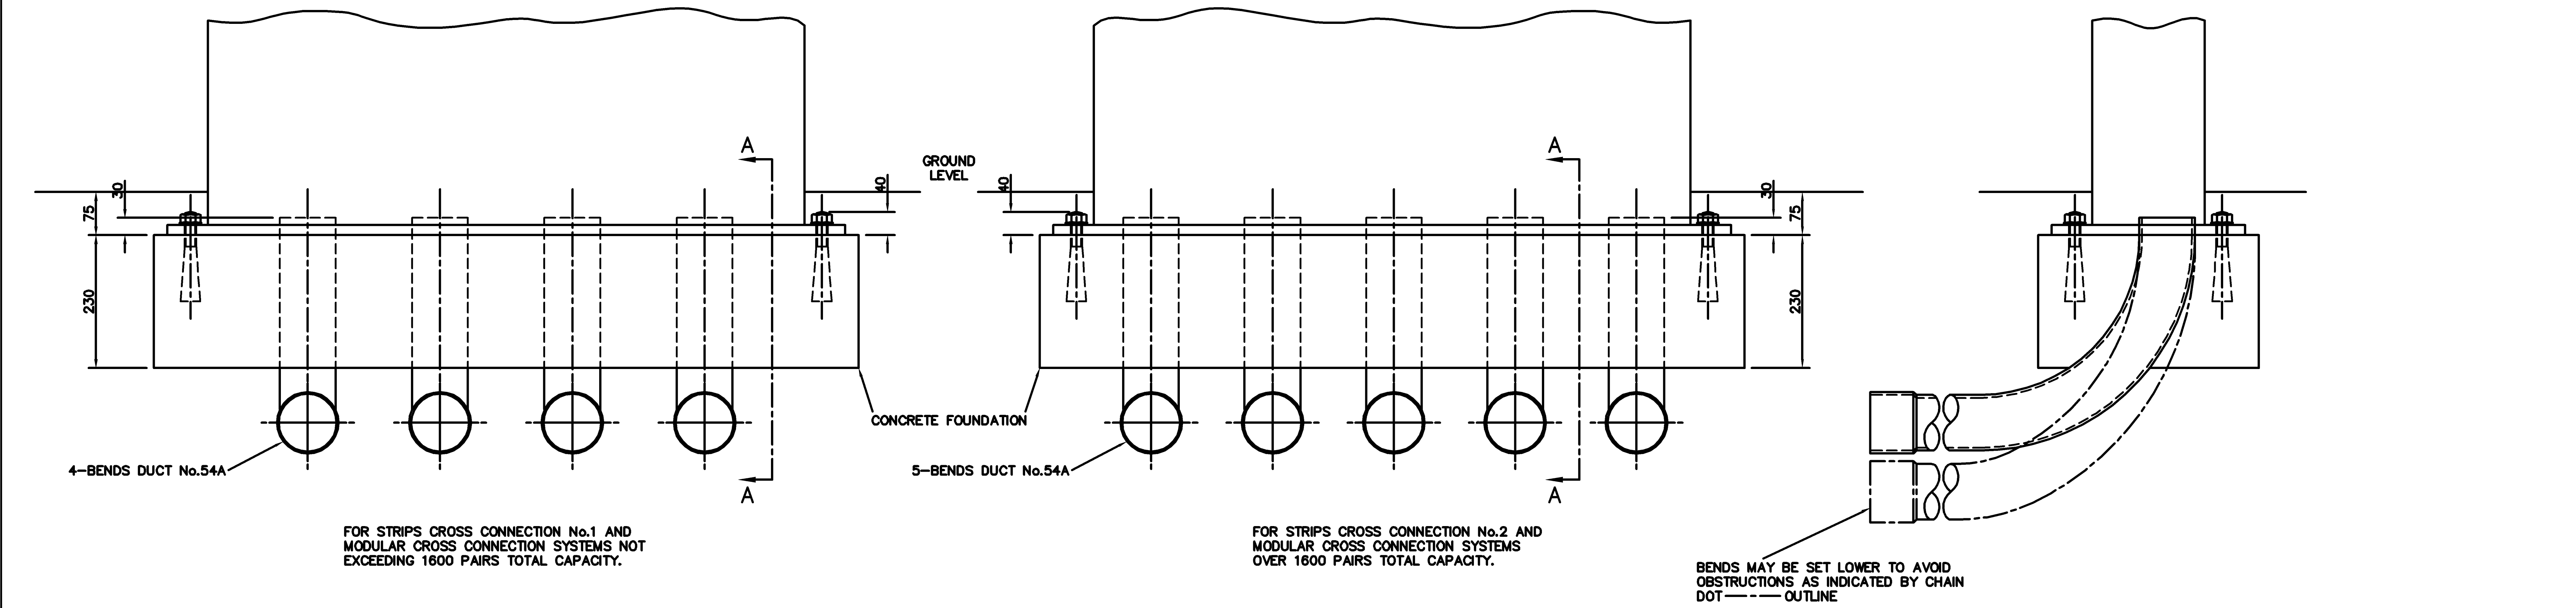

A1 A2		DRN G.C.M. CKD D.C. CERTIFICATION DESIGNER C.Owens CLIENT C. Owens	ANY MODIFICATION TO THE DRAWING OR THE USE OF ALTERNATIVE ITEMS TO THOSE SPECIFIED MUST BE AGREED WITH THE DESIGNER.	MATERIAL - FINISH -	AMEND DIMENSIONS C MORRELL LW 21/05/13 AMENDMENT	U ISSUE	DUCT TOLERANCE +/-10mm BOLT FITTINGS + 2	METHOD OF INSTALLATION OF CABINET CROSS CONNECTION NO.6	REFERENCES SPEC D1000 ALL THREADED FASTENERS AND TAPPED HOLES, UNLESS OTHERWISE STATED TO BE ISO METRIC COARSE PITCH SERIES (MEDIUM FIT) TO SPEC BS3643
DATE 07/03/47					DIMENSIONS IN mm UNLESS OTHERWISE STATED		© British Telecommunications plc 2007		DO NOT SCALE
							ORIGINAL SCALE		
							BEA3		CN 1464
							SHT 03 OF 05		