

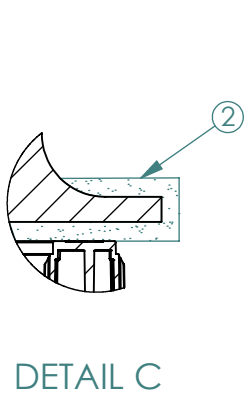


ITEM	DESCRIPTION
1	Cubis AX-S D400 Ductile Frame & Cover - 150mm Deep
2	10mm Mortar
3	Type 1 MOT Compacted Backfill
4	150mm Dry Lean Mix Compacted Concrete Base
5	Asphalt as per HAUC Requirements
6	90m Ducting
7	1800x675x600mm Ultima Connect Chamber

- Notes.
1. MINMUM COVER TO CROWN OF DUCTS TO BE 450MM
 2. BEDDING MORTAR TO COMPLY WITH HA104/09
 3. BASE TO BE COMACTED DRY LEAN MIX CONCRETE
 4. BOTTOM CHAMBER SECTION TO BE SET 20MM INTO FLOOR

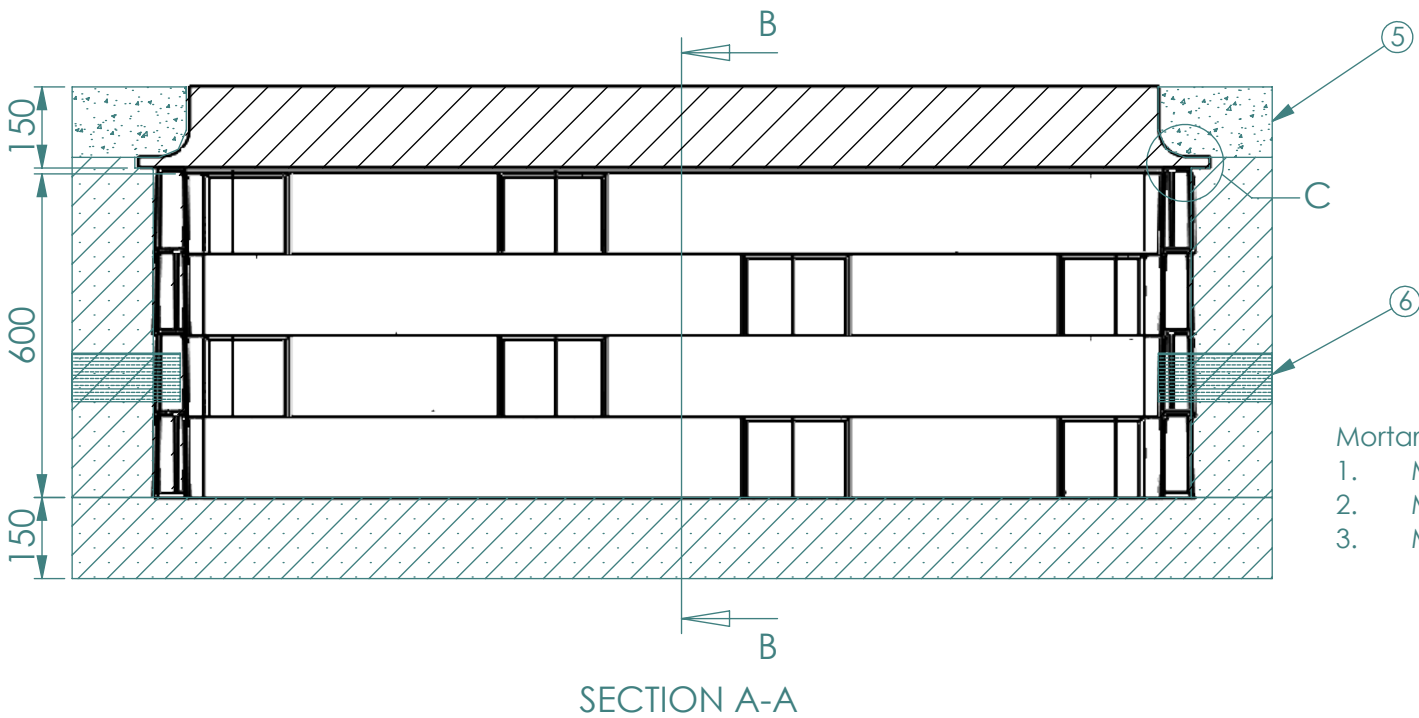

- Mortar.
1. MINIMUM 10MM UNDER FLANGE
 2. MINIMUM 10MM OVER FLANGE
 3. MINIMUM 50MM WIDER THAN FLANGE

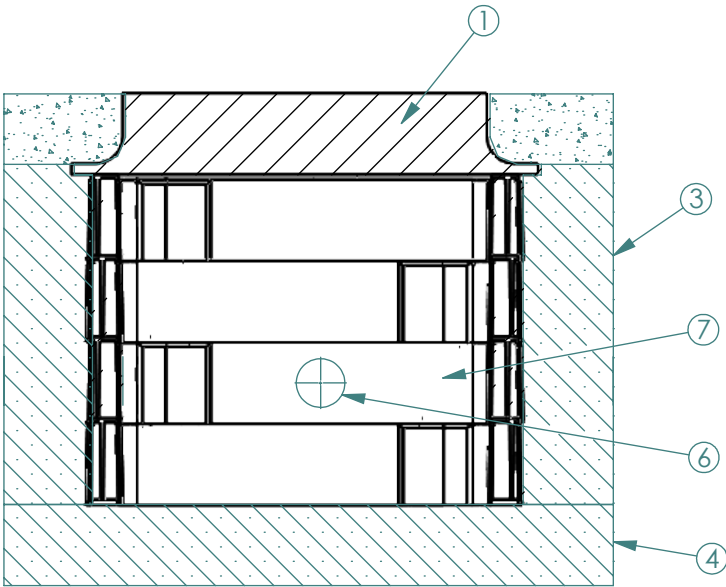

Copyright of Cubis. No part of this document may be communicated, copied or used without prior permission of Cubis.

www.Cubis-Systems.com

Date	05/09/18
Drawn	CH
Appr.	CH

Third Angle Projection
Weight

N/A

Material	-
Finish	-
Tolerance unless Otherwise Stated	+1,-1

DIMS

TITLE	Gicaclear CW3 Ultima Connect Chamber & AX-S D400 Ductile Frame & Cover
SIZE	A3
DWG NO	16597 - 03
SHEET 1 OF 1	REV

Rev	Date	Revision History: Description	Drwn	Appr
.	--/--/--	.	.	.
.	--/--/--	.	.	.
.	--/--/--	.	.	.
.	--/--/--	.	.	.