


Technical drawing of a ship's hull section showing the Sideshaft and Manhole assembly. The drawing includes dimensions: 21B, 21A, 21B, 18,19, 18, 20B, 20A, and 20B. Labels include SIDESHAFT, MANHOLE, and MANHOLE.

1. THIS DRAWING TO BE READ IN CONJUNCTION WITH ALL OTHER DRAWINGS, DOCUMENTATION AND SPECIFICATIONS RELATING TO THIS STRUCTURE TYPE.
2. REINFORCEMENT TO BE GRADE B500B OR B500C CONFORMING TO BS4449: 2005 (REFER CLAUSE 1712 SHW).
3. BAR SCHEDULE AND BENDING TO CONFORM TO BS8666.
4. MINIMUM COVER 55mm TO ANY CONCRETE FACE PROPRIETARY APPROVED SPACERS TO BE UTILISED.
5. ADDITIONAL BARS MAY BE UTILISED TO TIE / SUPPORT MAIN BARS AS REQUIRED.
6. MAX BAR SPACING TO BE 150mm.
7. THIS DRAWING SHOWS A 4.0M SHAFT WHICH MAY BE EXTENDED TO A MAX. 10.0m.




ROOF

- F1
- F2
- N1
- N2
- B1
- B2
- T1
- T2

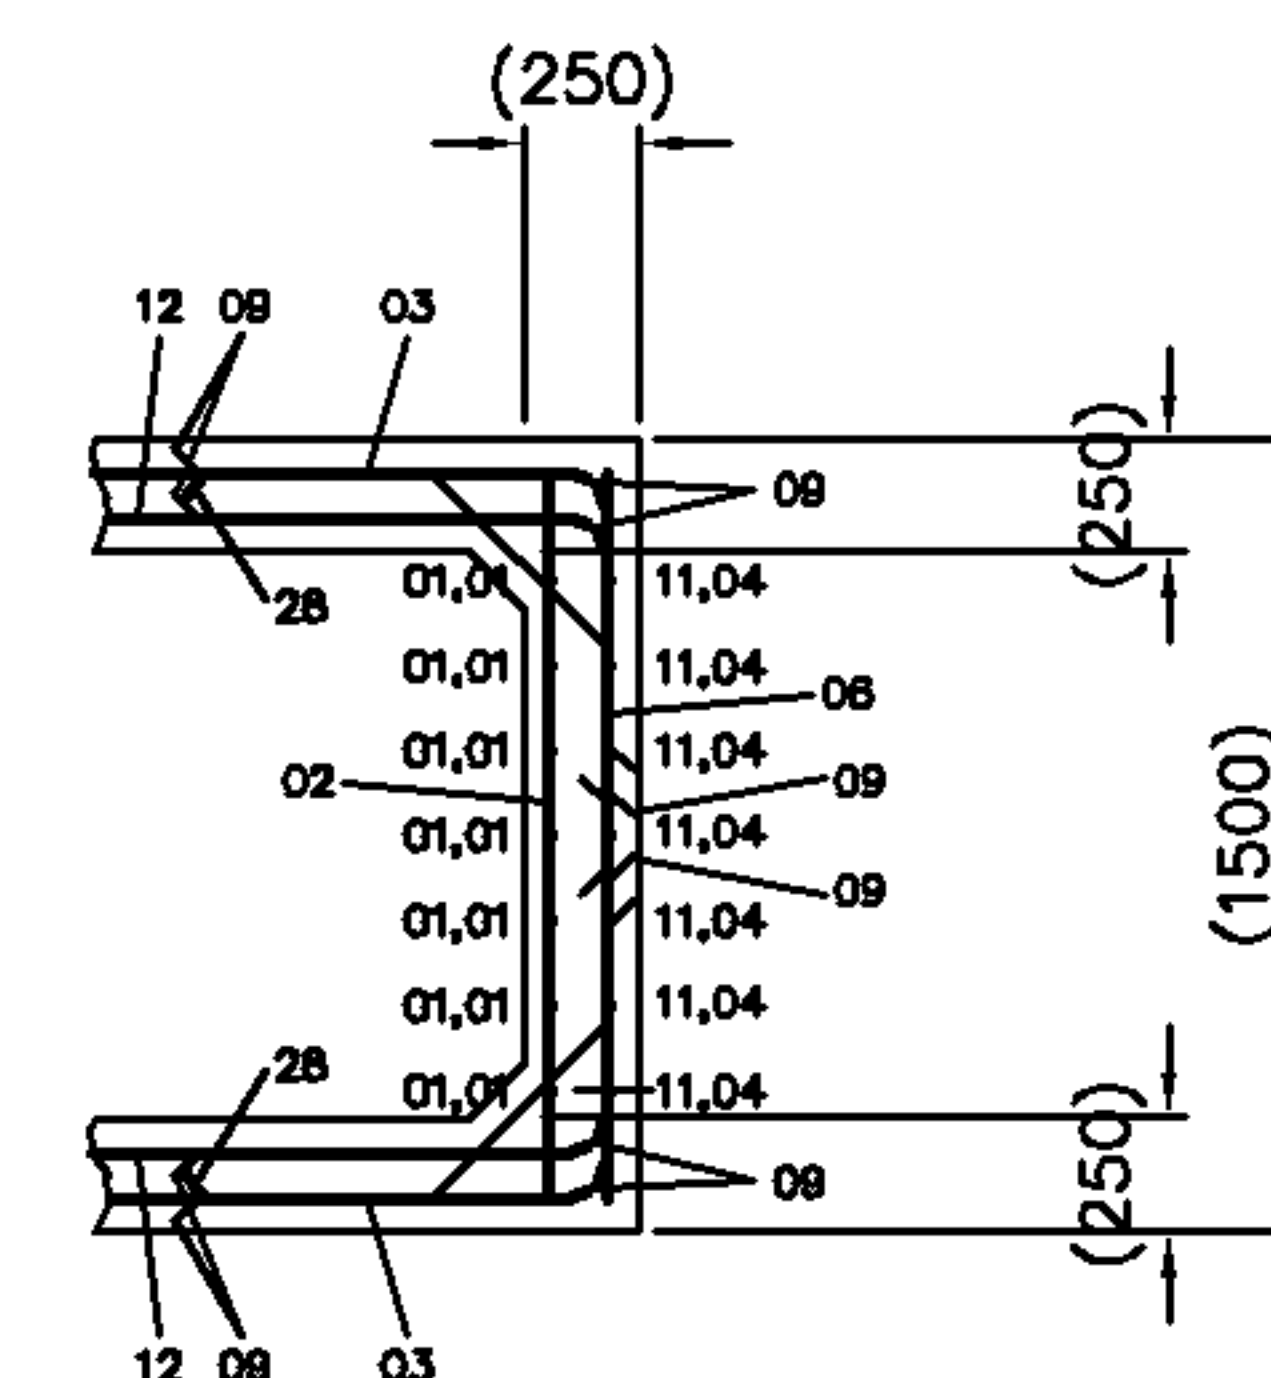

SECTION D-D

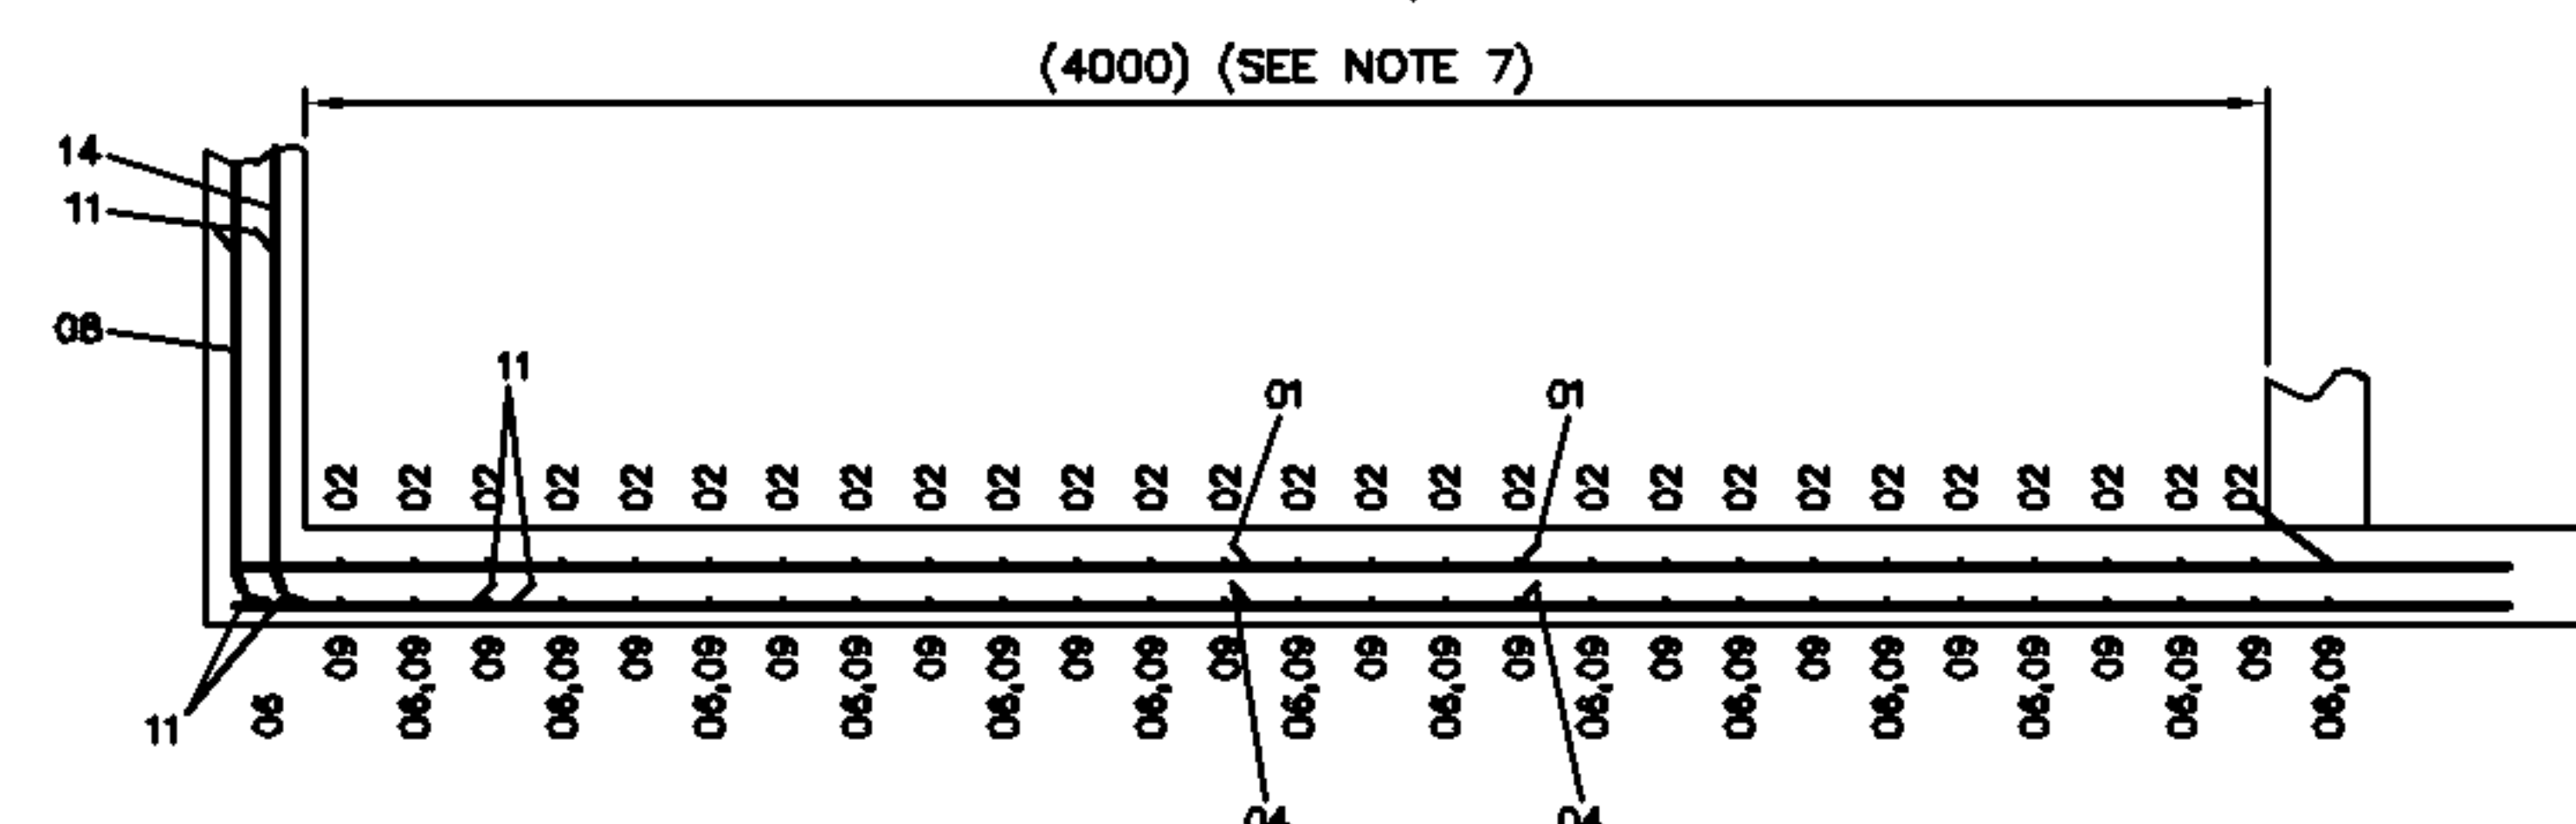

FLOOR

SHT 02 OF 05