

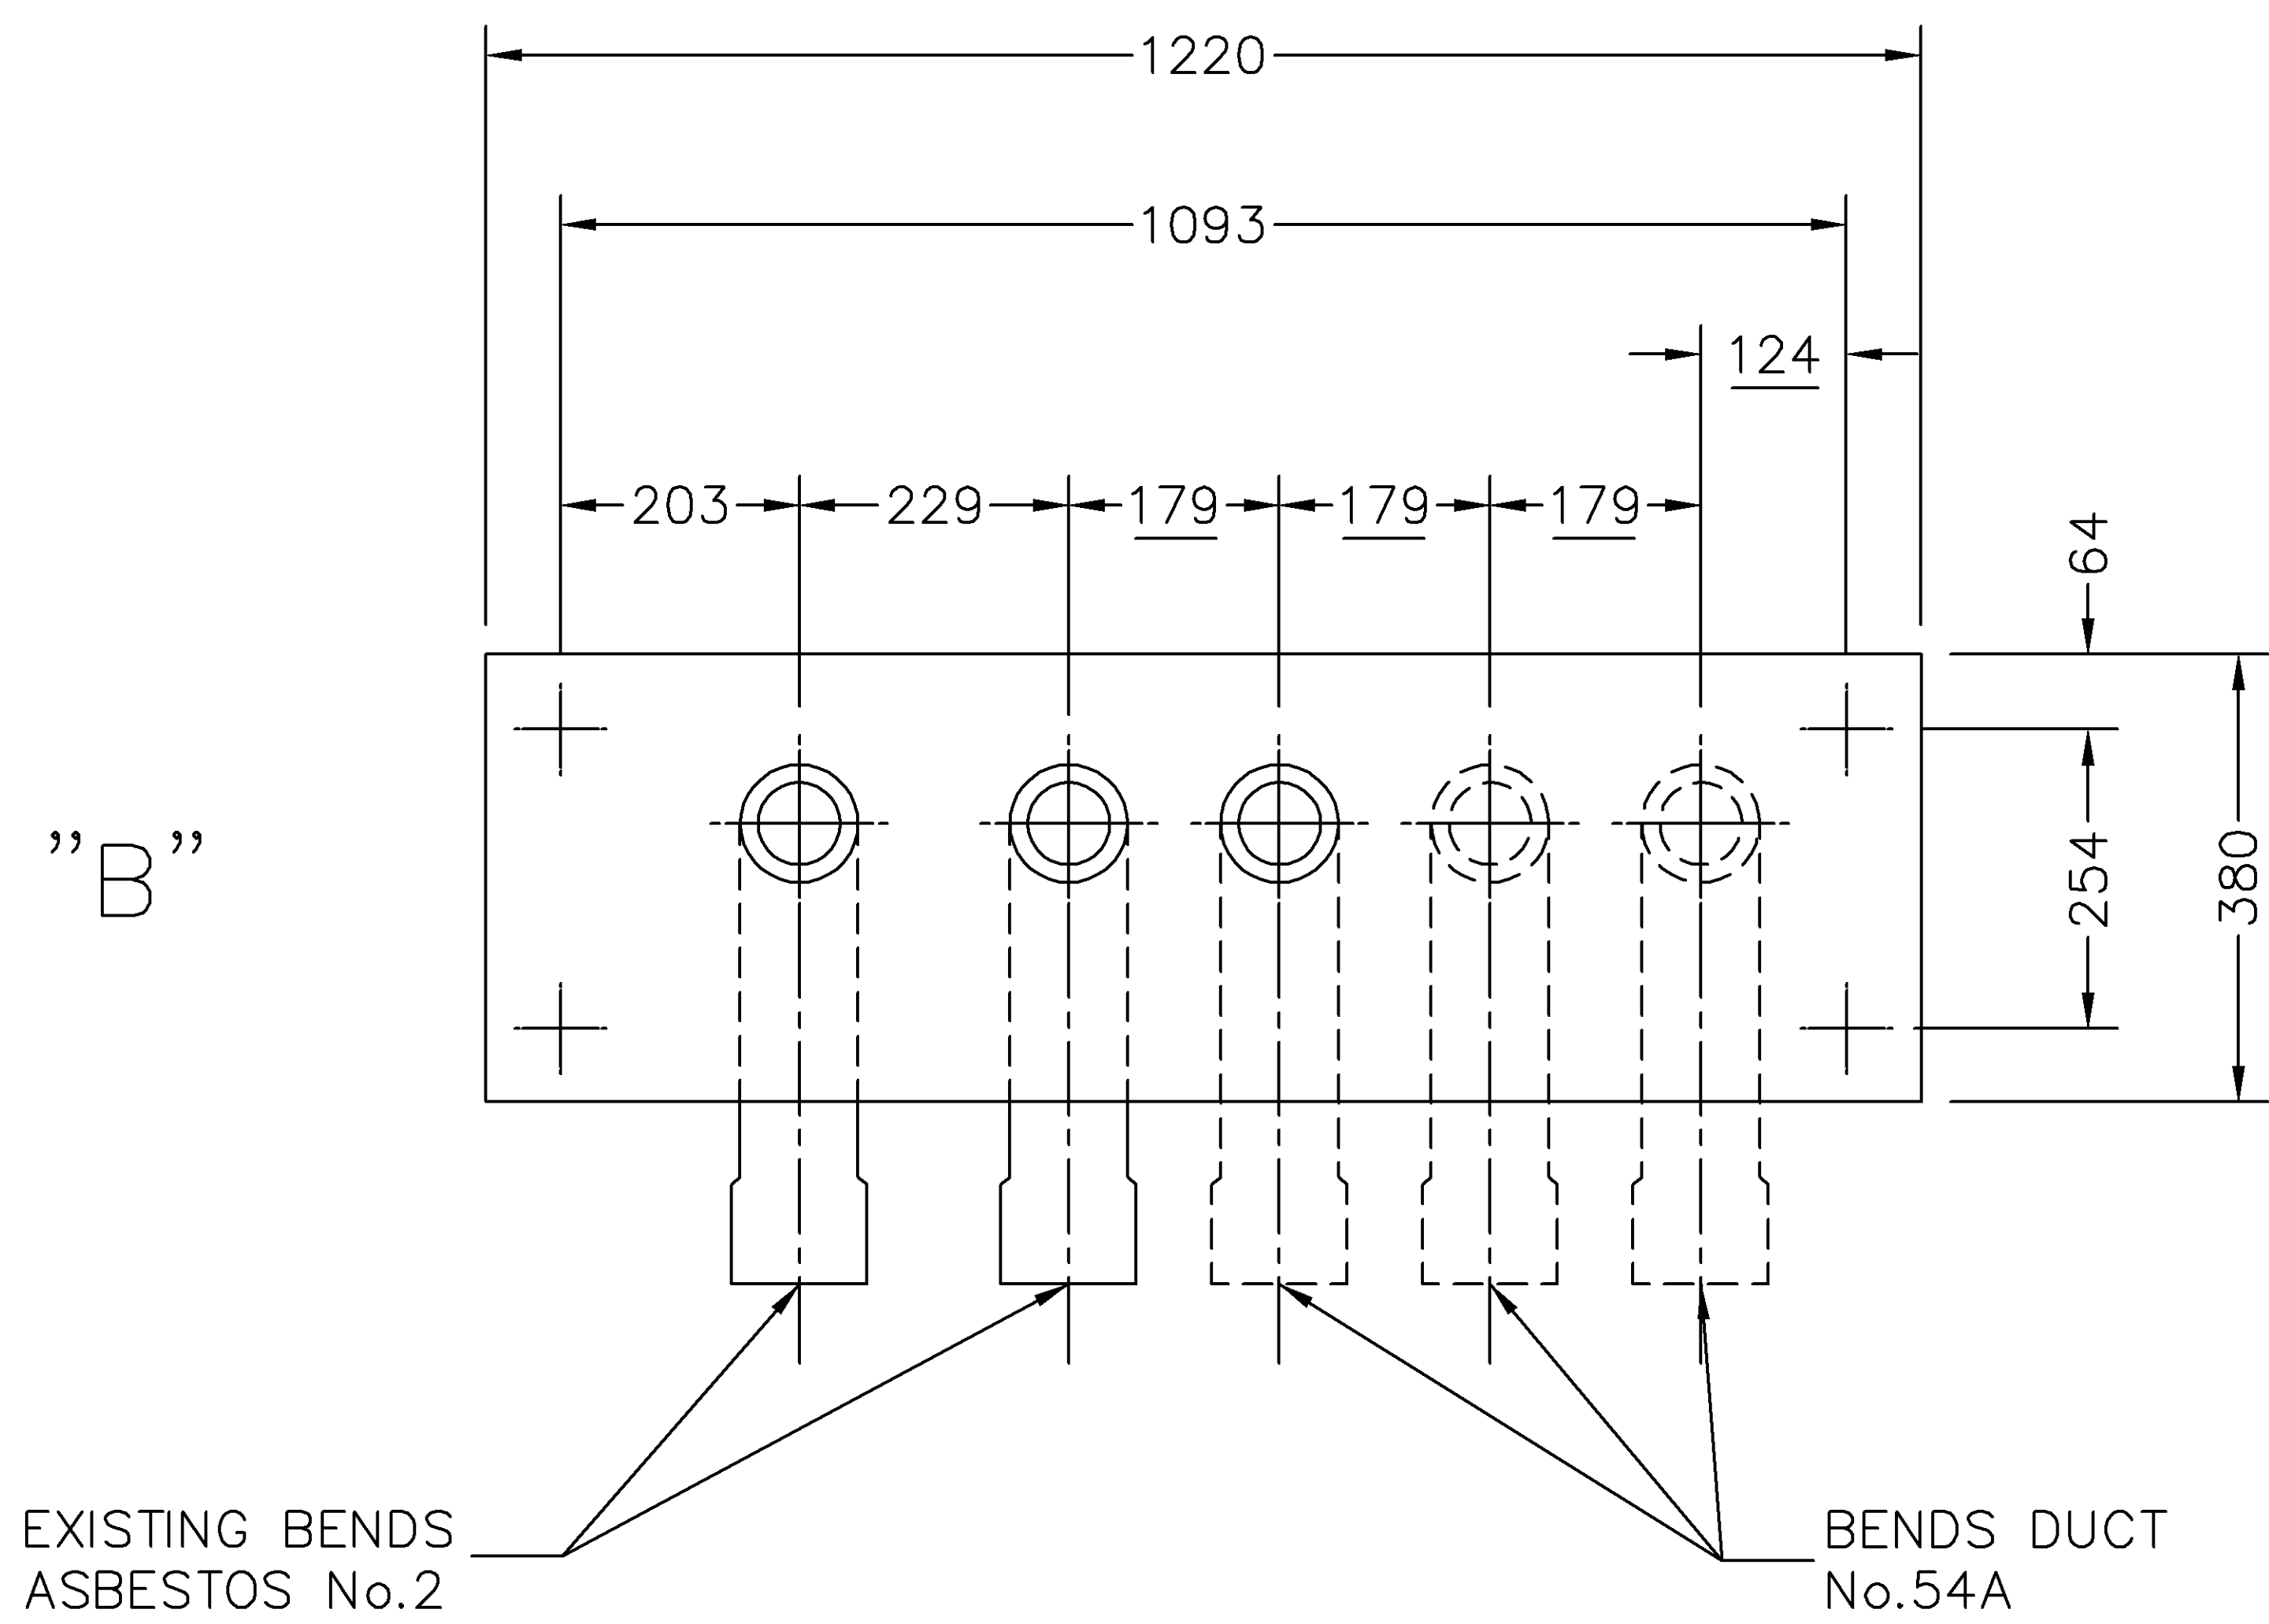


FOR CABINET CROSS CONNECTION No.2

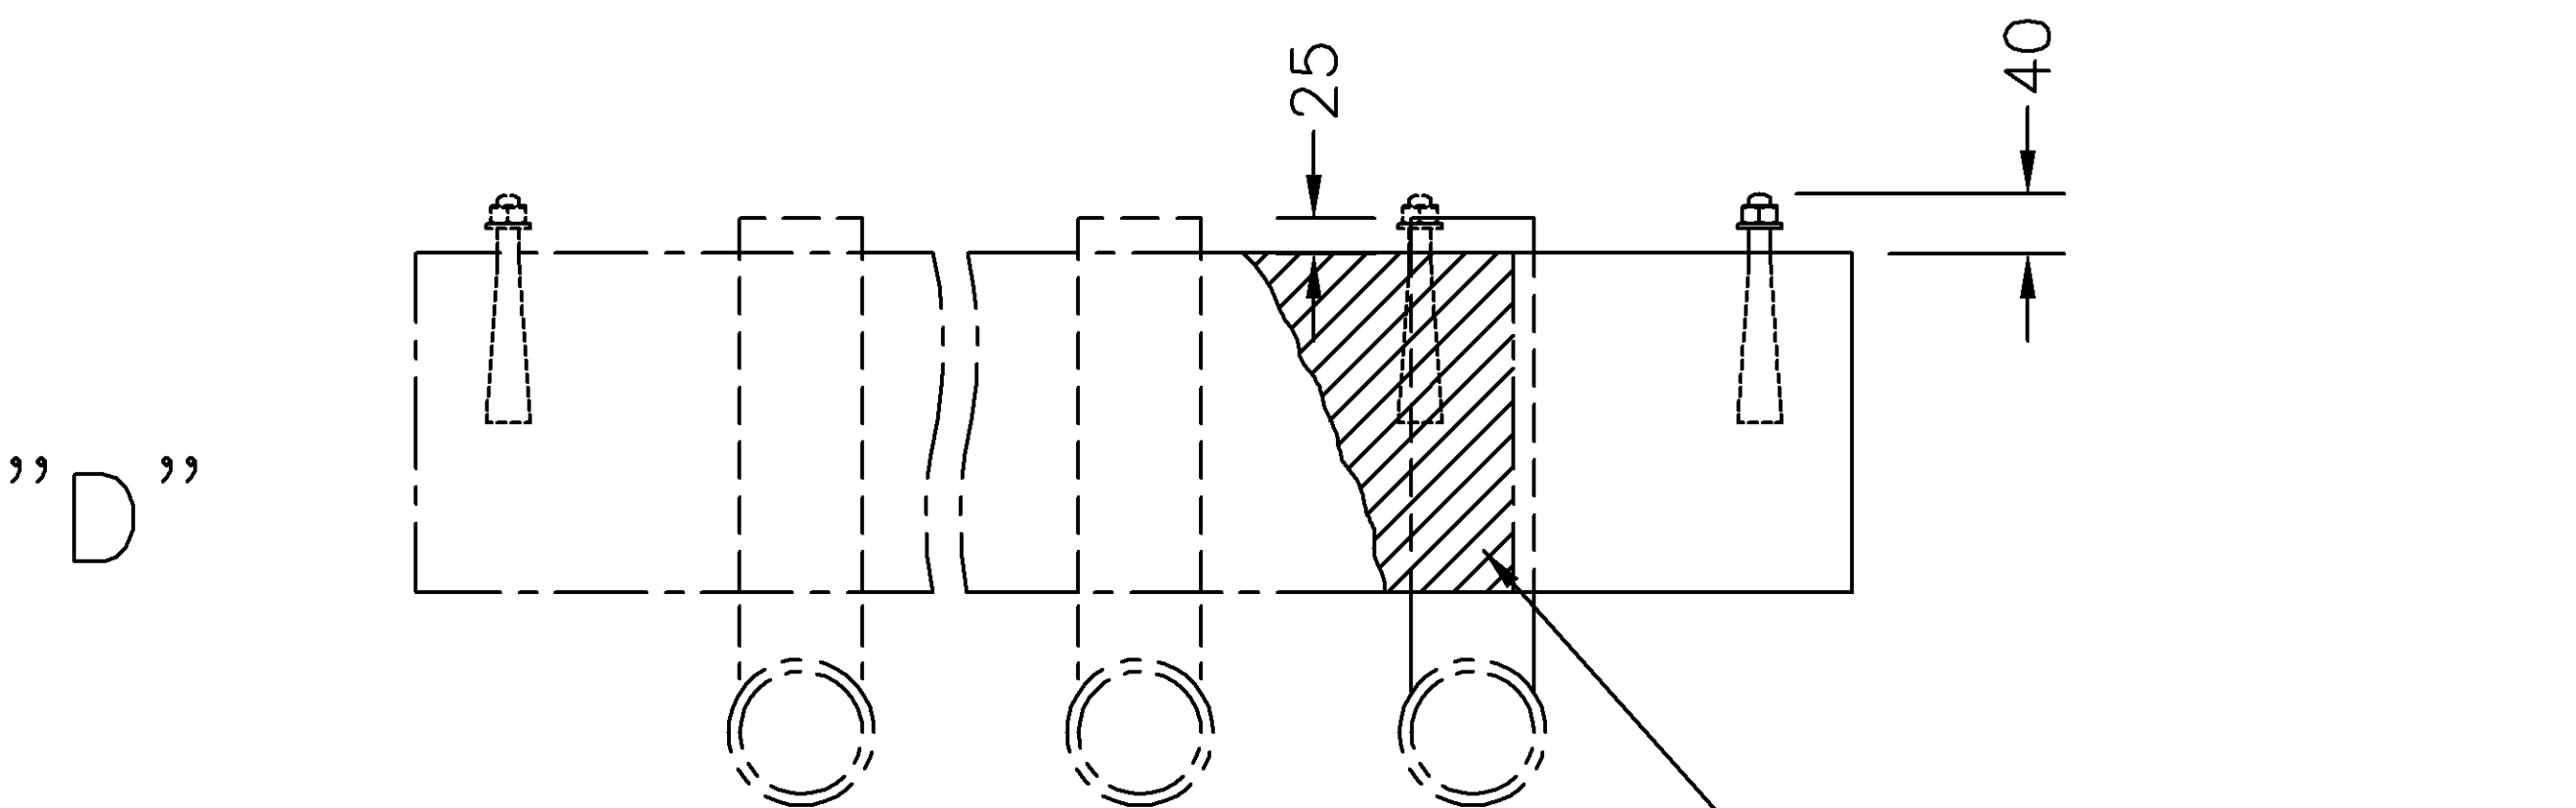

FOR CABINET CROSS CONNECTION No.1

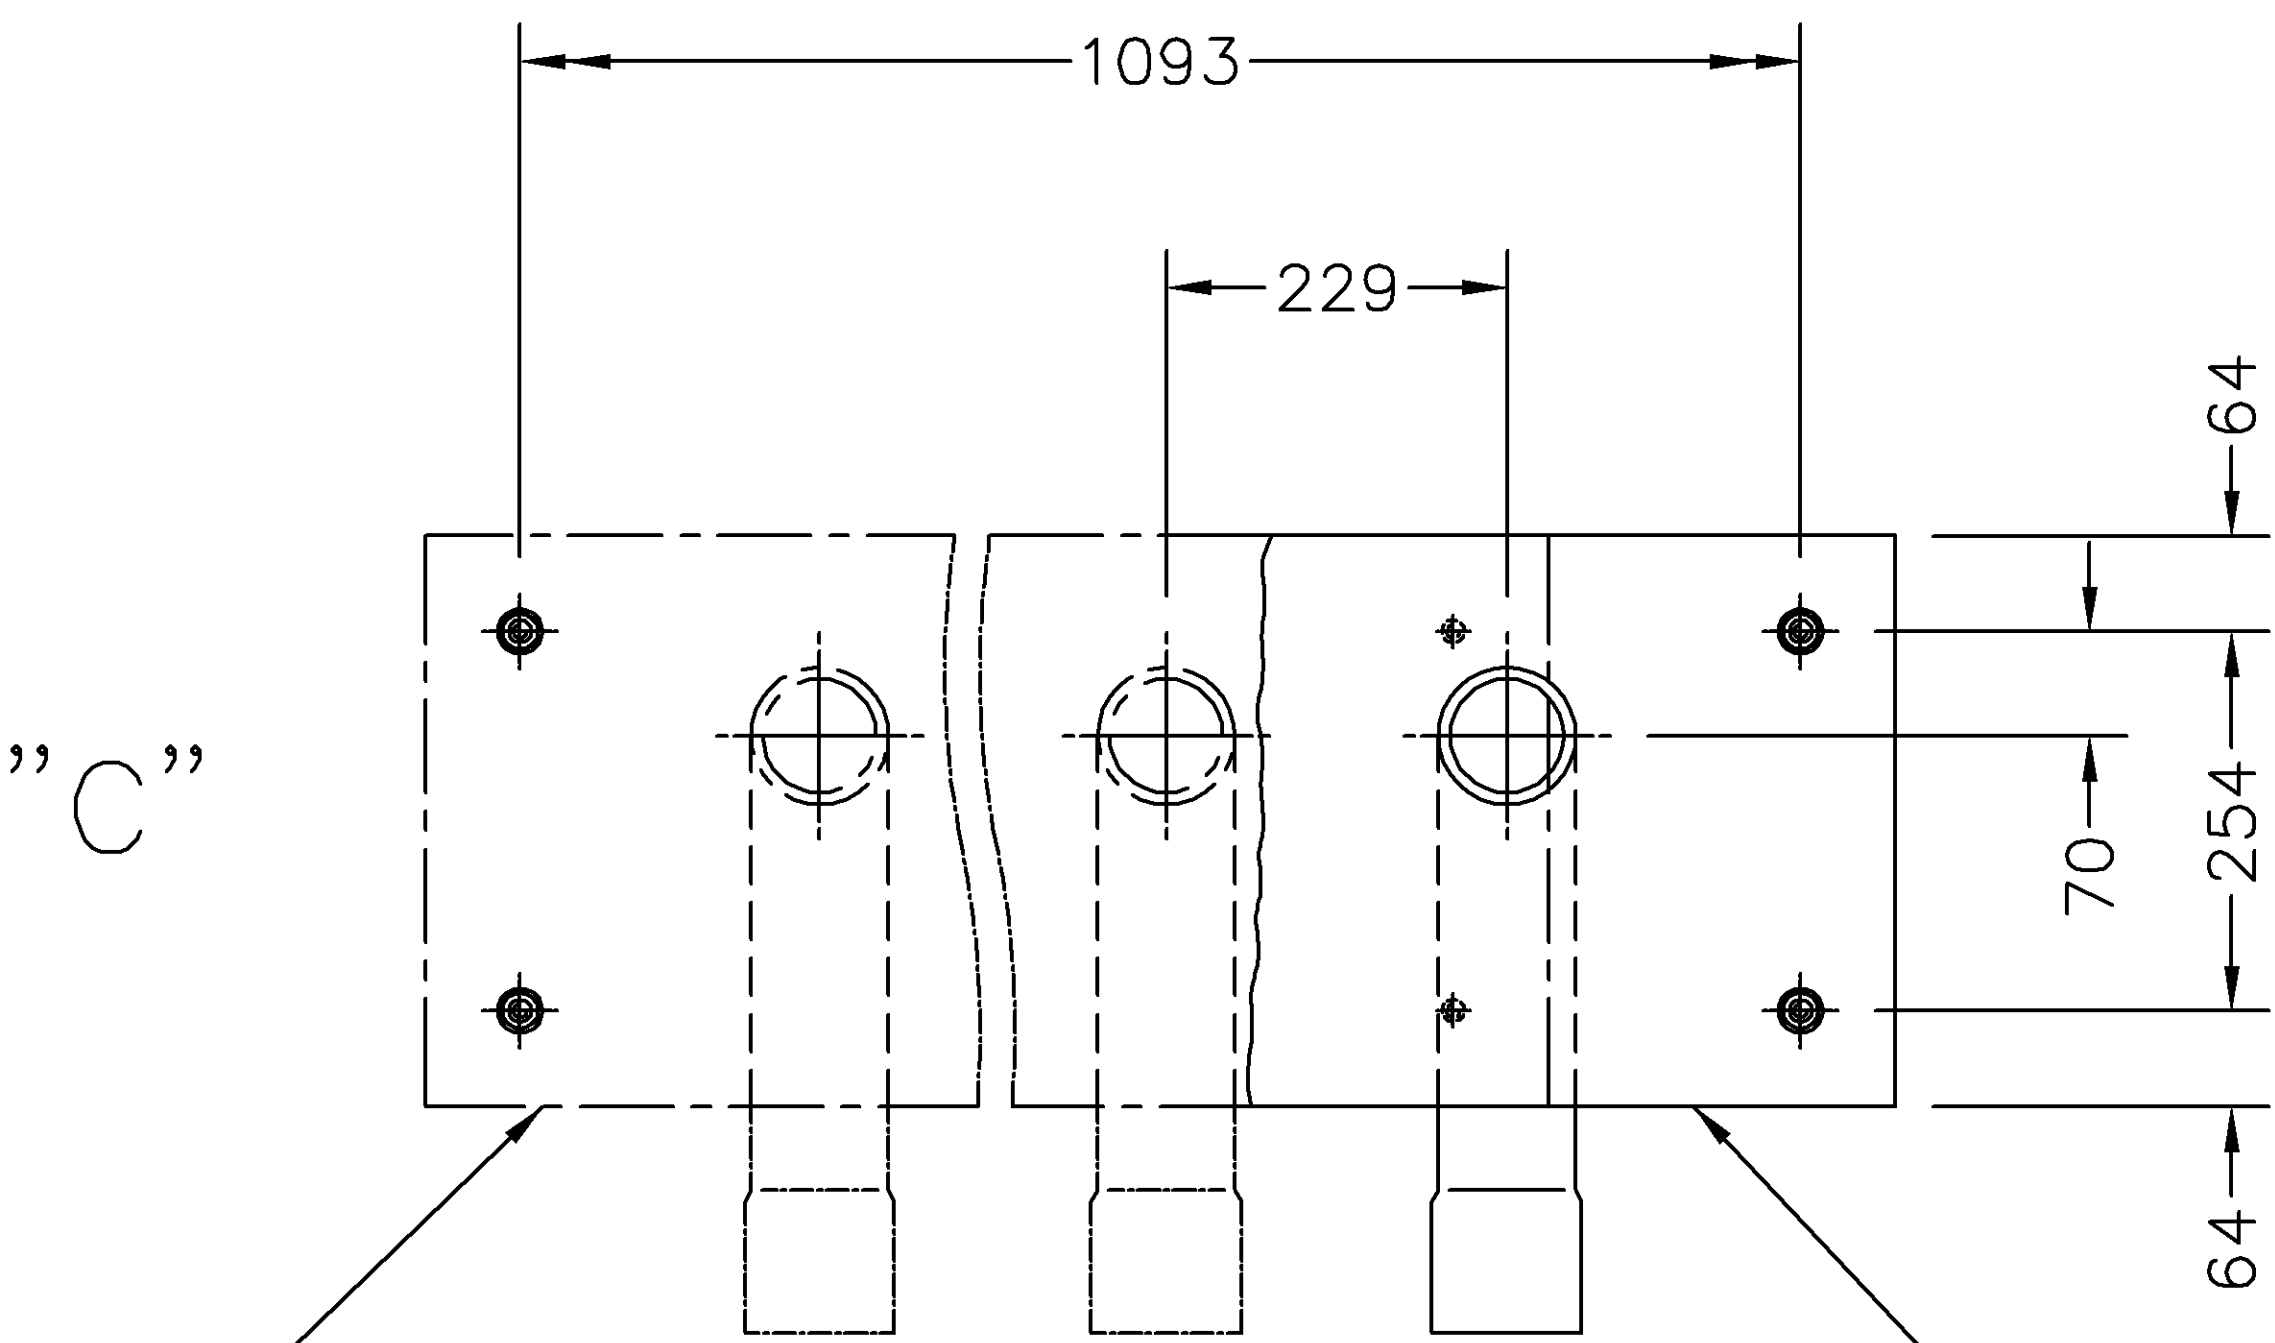

- NOTES: –
1. CONCRETE PACK TO BE MINIMUM GRADE C32/40.
  2. RESIN PACK 6B BEFORE POURING IN, THE INTERNAL SURFACE OF THE CABINET BASE MUST BE CLEANED.
  3. POUR RESIN PACK 6B TO A DEPTH OF 20mm.

ANY MODIFICATION TO THE DRAWING OR THE USE OF ALTERNATIVE ITEMS TO THOSE SPECIFIED MUST BE AGREED WITH THE DESIGNER.

DIMENSIONS IN mm UNLESS OTHERWISE STATED

© British Telecommunications plc 2000

DO NOT SCALE

ORIGINAL SCALE 1:10

|          |   |               |  |   |   |   |       |                                      |
|----------|---|---------------|--|---|---|---|-------|--------------------------------------|
| A2<br>A3 | DRN A.H.<br>CKD H.S.W.                            | MATERIAL<br>— | AMEND ATTRIBUTES<br>REMOVE REF. TO PAINT RESIN 6b 40mm<br>UO SIDE OF CABINET | I | TOLERANCES: CN15456<br>BOLT FITTINGS ±2mm | EXTENSION OF BASE OF<br>CABINETS Nos 1 & 2 TO SUIT<br>No.6 (NOT EXCEEDING<br>1600 PRS TOTAL CAPACITY) |       | REFERENCES<br>SPEC. LN550<br>CN15456 |
|          | CERTIFICATION<br>DESIGNER<br>N/A<br>CLIENT<br>N/A | FINISH<br>—   |  |   |   |   |       |                                      |
|          | DATE 29/09/54                                     |               |  |   |   | D.CUSSELLE IMCR MM 14.10/09   | ISSUE | OPENREACH NCAD                       |
|          |   |               | AMENDMENT  |   |   |   |       |                                      |