



PLAN VIEW  
(BRICKWORK NOT SHOWN)

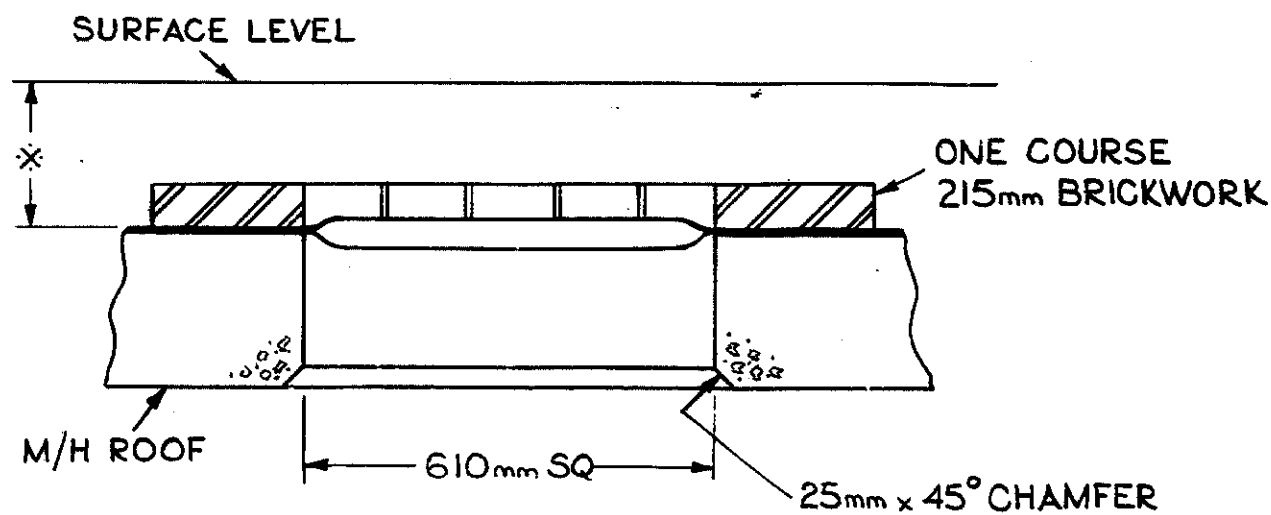


CABLING ENTRANCE  
(WITHOUT SHAFT)

✱ SEE DRG CN1961  
Ø TO SUIT FRAME & COVER

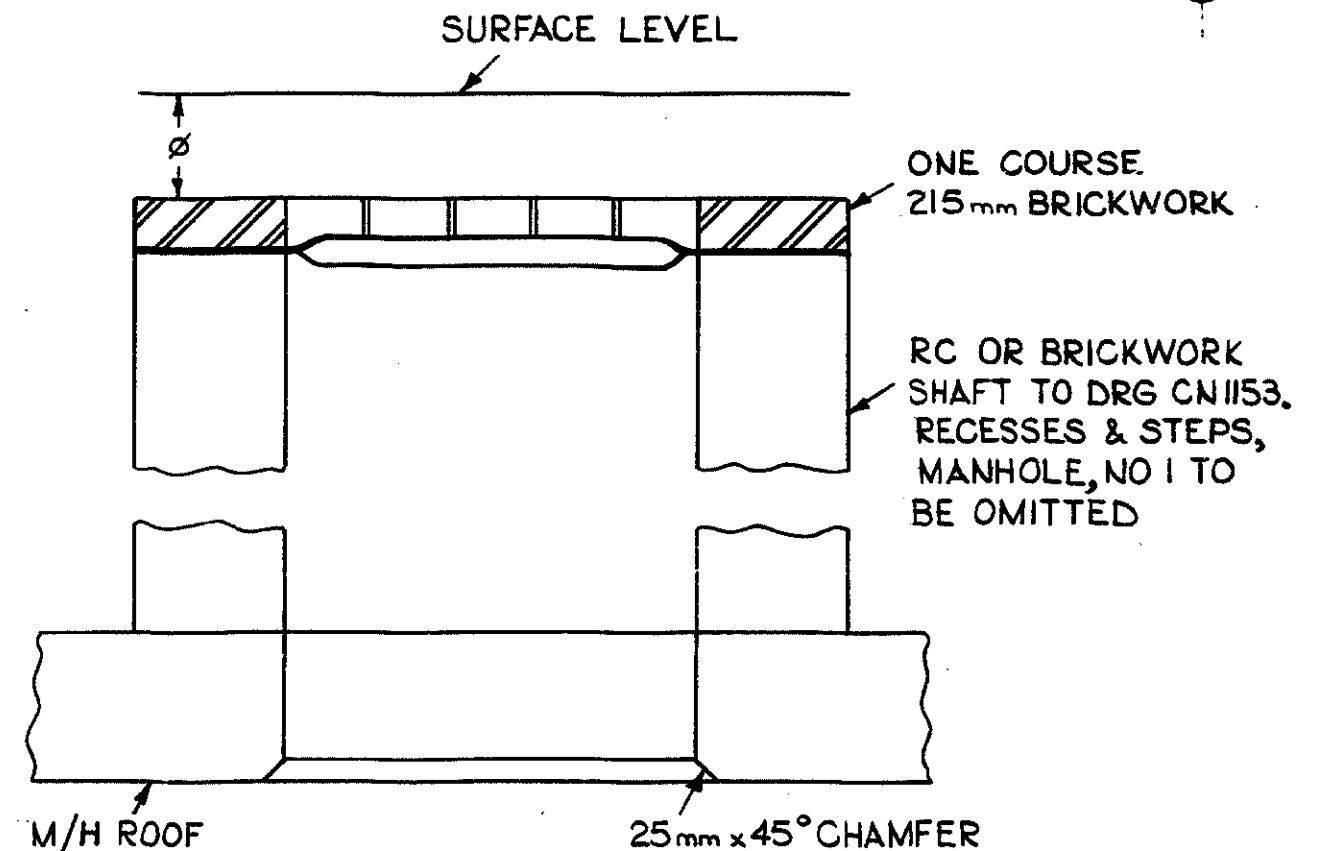

CABLING ENTRANCE WITH SHAFT

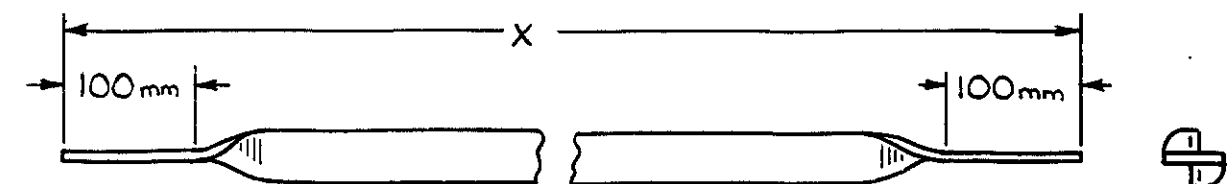

SCHEDULE		
REF.	DIM X	NO OFF
BAR A	680mm	2
BAR B	440mm	2

TO BE MADE UP LOCALLY  
MATERIAL :- MS 40mm x 6mm  
FINISH :- GALVANIZED

Ø TO SUIT FRAME & COVER										FINISH :- GALVANIZED										DO NOT SCALE									
A2 A3	DRN JSS CKD			BAR C DELETED BARS A&B REPOSITIONED	C	TOLERANCES UNLESS OTHERWISE STATED TO BE : DIMS 25 & BELOW ± 1 DIMS BETWEEN 25 & 160 ± 2 DIMS 160 & ABOVE ± 5		MATERIAL AS SHOWN	FINISH AS SHOWN	REFERENCES SPEC D1000 DRG CN1153 DRG CN1961																			
	CERTIFICATION	REF TO BAR C DELETED FROM SCHEDULE. J.BROWN P.R.G (CC) 31/05/00 RE-DONE IMCR 18/05/11	E	TO BE MADE UP LOCALLY NOTE ADDED	B	ANGULAR TOLS ± 1°		MANHOLE CABLING ENTRANCE SAFETY GRID & METHOD OF FIXING		DIST:- HQ., REG, U/G CONST.																			
THQ 4652	DATE 2.12.70	GENERAL TOLERANCES ADDED RFG CS MS 7/6/93	D	SHEET 1, CANCELLATION NOTE ADDED	A	POST OFFICE TELECOMMUNICATIONS HQ OP10-1-1 SECTION		CN10713 SHEET 2		SHEET 1 CANCELLED																			
				AMENDMENT	ISSUE																								

DO NOT SCALE