


В



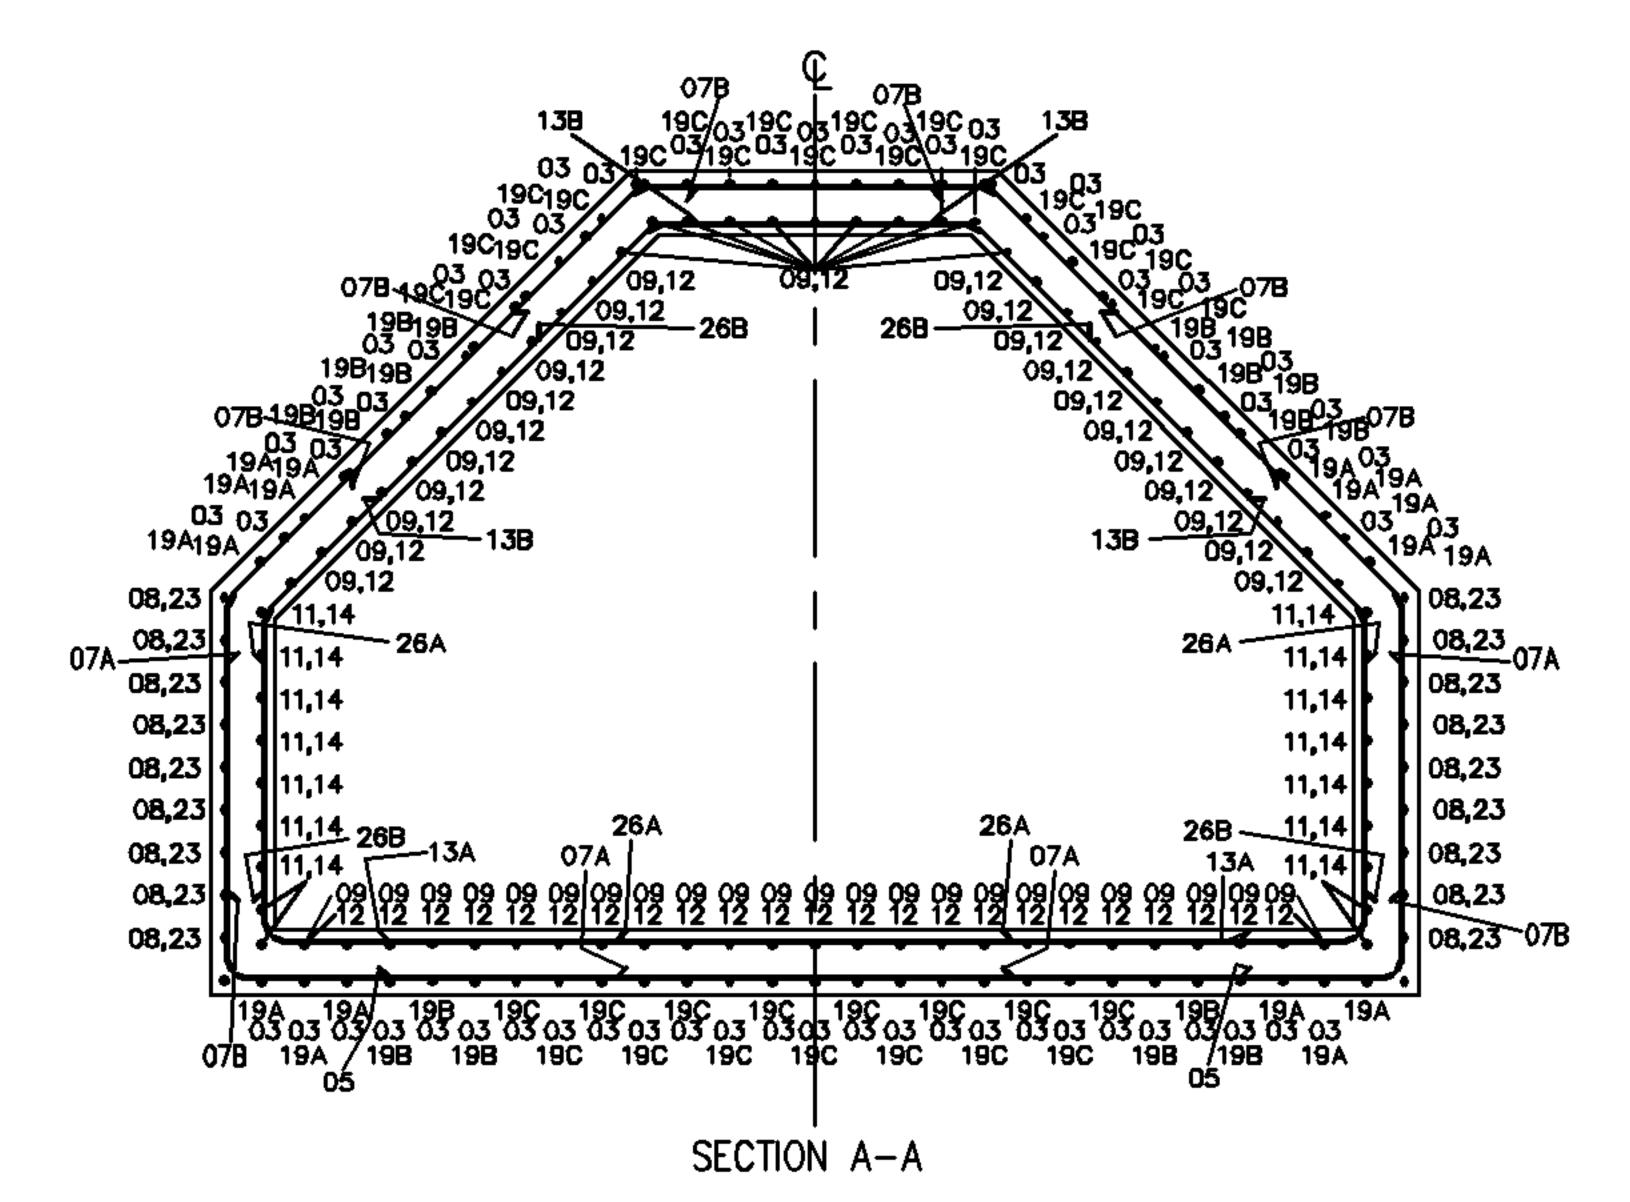

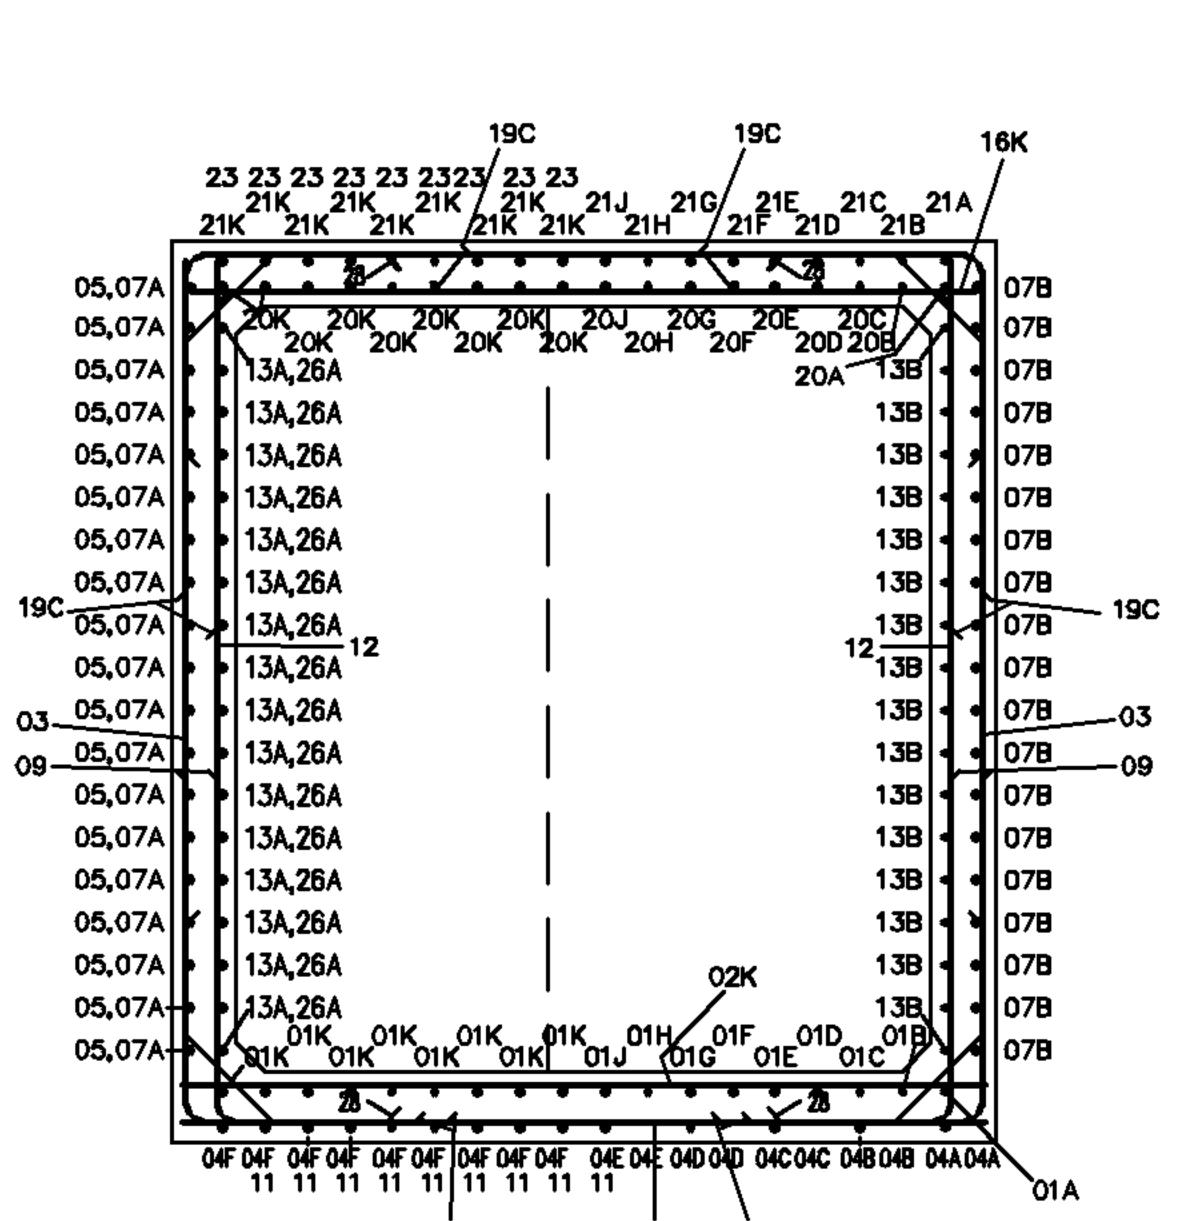


09

09

SECTION B-B

<u>NOTES</u>

- 1. THIS DRAWING TO BE READ IN CONJUNCTION WITH ALL OTHER DRAWINGS, DOCUMENTATION AND SPECIFICATIONS RELATING TO THIS MANHOLE STRUCTURE TYPE CONSTRUCTION
- 2. REINFORCEMENT TO BE GRADE B500B OR B500C CONFORMING TO BS4449: 2005 (REFER CLAUSE 1712 SHW).
- 3. BAR SCHEDULE AND BENDING TO CONFORM TO BS8666.
- 4. MINIMUM COVER 45mm TO ANY CONCRETE FACE PROPRIETARY APPROVED SPACERS TO BE UTILISED.
- 5. BARS INTERSECTING HOLES TO BE CUT ON SITE AND TRIMMED TO CN13916
- 6. ADDITIONAL BARS MAY BE UTILISED TO TIE / SUPPORT MAIN BARS AS REQUIRED.
- 7. MAX BAR SPACING TO BE 150mm.

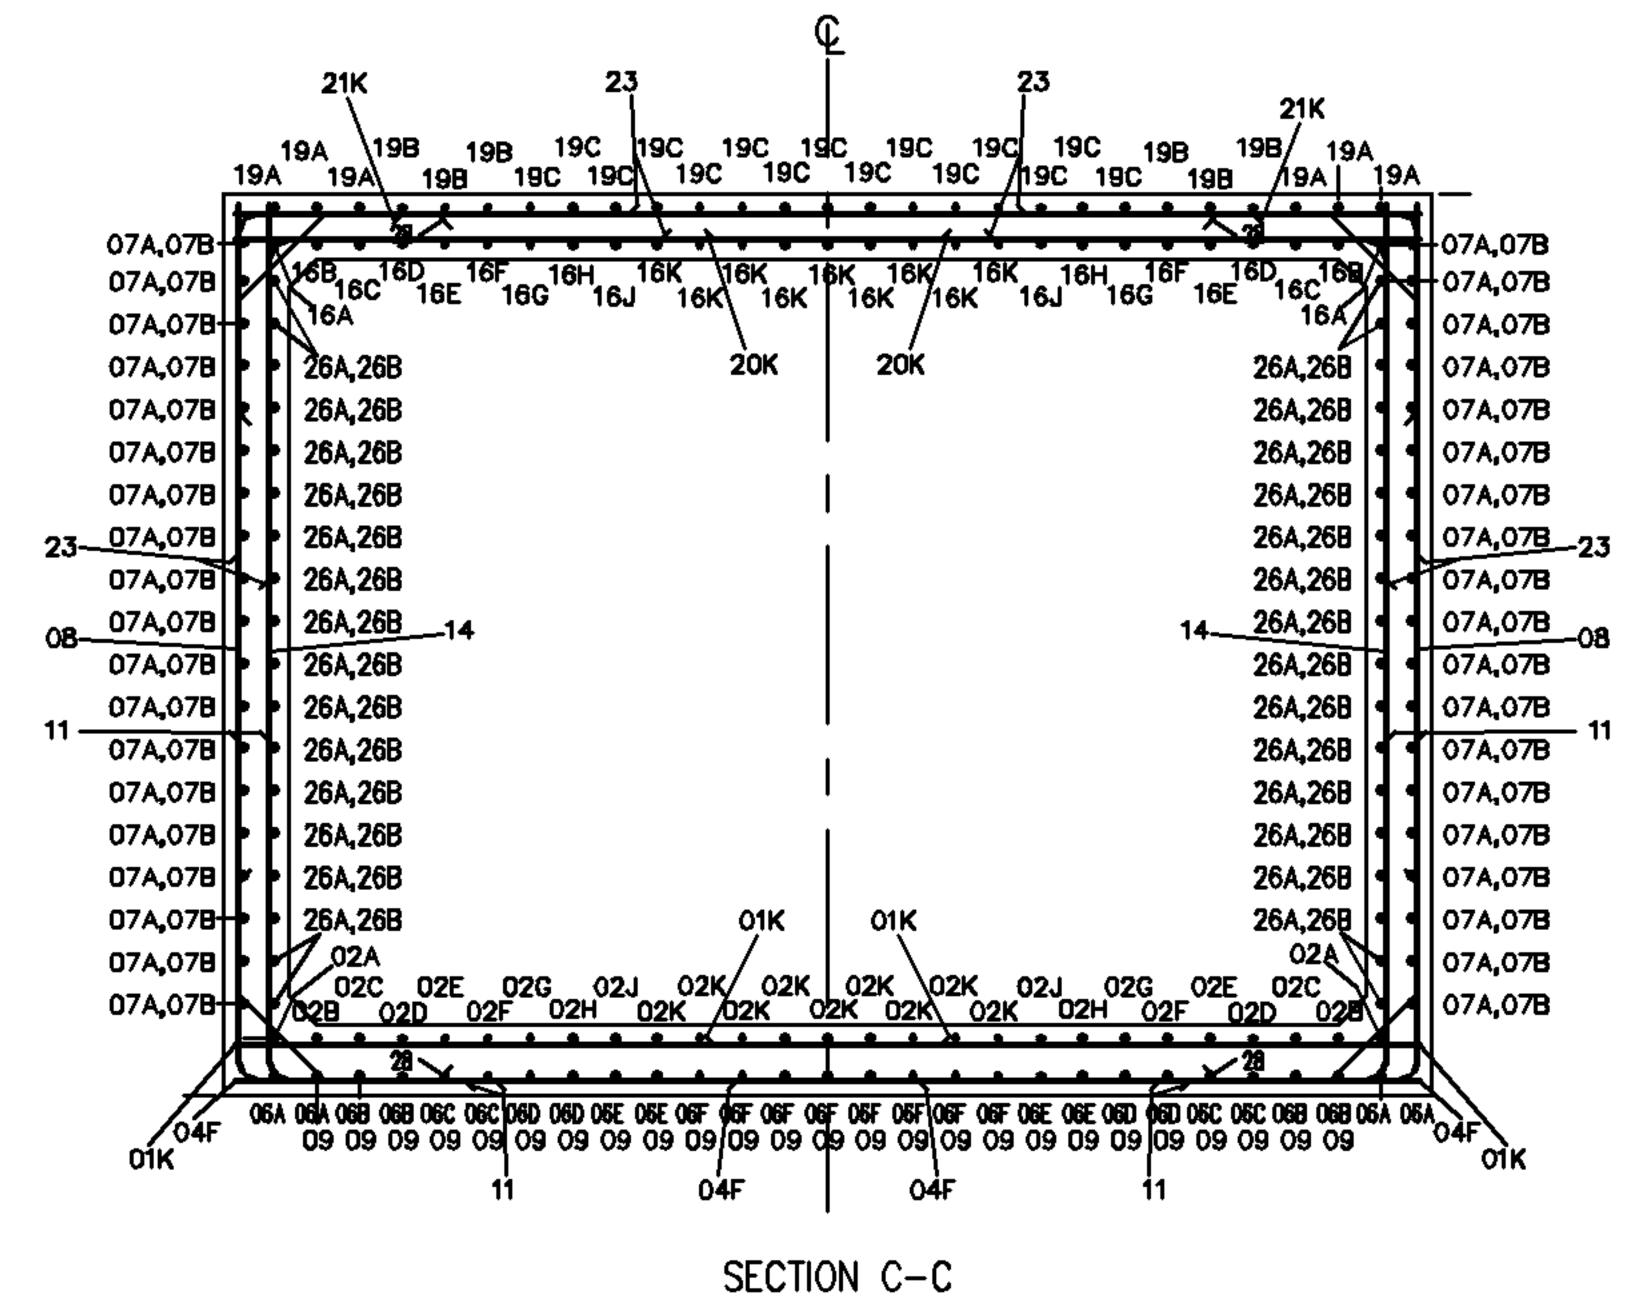

MANHOLE DRAWN TO 'C' SIZE

DIMENSIONS IN mm UNLESS OTHERWISE STATED © British Telecommunications plc 1994 DO NOT SCALE ORIGINAL SCALE 1:20 DRN RFG C S ANY MODIFICATION TO THE DRAWING OR THE USE OF ALTERNATIVE MATERIAL OMS Drawing Review TOLERANCES TO SPECS REFERENCES STANDARD BS8666, BS5606, BS EN1992 CN15456. SPECS: BS8666, BS EN1992 Drawing number amended to 05 of 08 MANHOLE MRX613A,613B,613C <u>A1</u> A2 ITEMS TO THOSE SPECIFIED MUST BE AGREED WITH THE DESIGNER. DRGS: CN15456. SECTIONS M DA RIOS **FINISH** VARIOUS LOCATIONS 23.08.15 OMS M DA RIOS SHT 05 OF 08 CN 14949 ALA944 ISSUE Openreach DATE 04/07/94 **AMENDMENT**