



ITEM	DESCRIPTION
1	Cubis AX-S B125 Concrete Infill Cover
2	Cable Management Kit
3	Type 1 MOT
4	40mm Dry Lean Mix Concrete
5	10mm Sand & Cement (Drymix)
6	Soakaway
7	Sump Grate - ACSD00-02450245
8	50-90mm Deep Asphalt
9	2300x750x600mm Ultima Connect Chamber
10	90mm Ducting

Notes.

- END DUCTS TO BE IN LINE
- WHERE POSSIBLE DUCTS TO BE POSITIONED NO LESS THAN 75MM FROM SIDE WALLS & 100MM FROM BASE
- 3. CHAMBER SIDE WALLS TO BE BACK FILLED MINIMUM 150MM COMPACTED TYPE 1 MOT

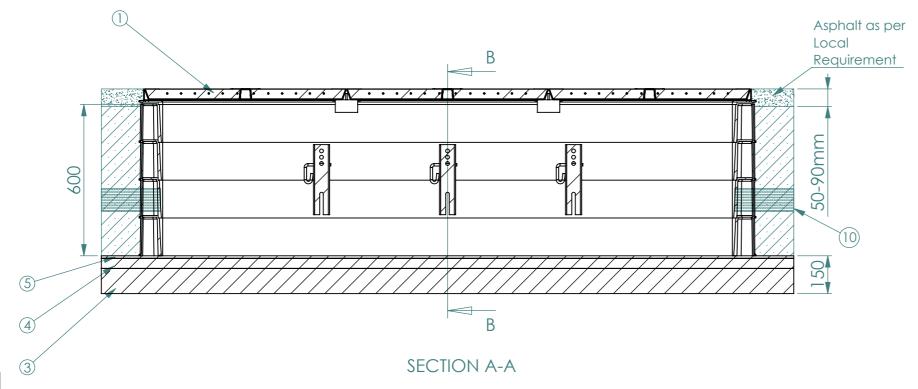

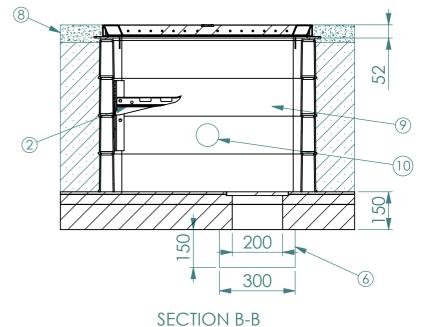



JBIS	Copyright of Cubis. No part of this document may be communicated, copied or used without prior permission of Cubis.
STEMS —	www.Cubis-Systems.com

bis. No part of this ent may be	Date
d, copied or used ermission of Cubis.	Drawr
s-Systems.com	Appr.

Э	17/08/18	Third Angle Projection
'n	СН	Trojociion
r.	СН	Weight

(Mate	erial			
. kg	Finish				DIMS
	Tolerance unless Otherwise Stated		+1,-1	mm	

P

	//			
	//	·		
	//	·		
	//	·		
Rev	Date	Revision History: Description	Drwn	Apr