
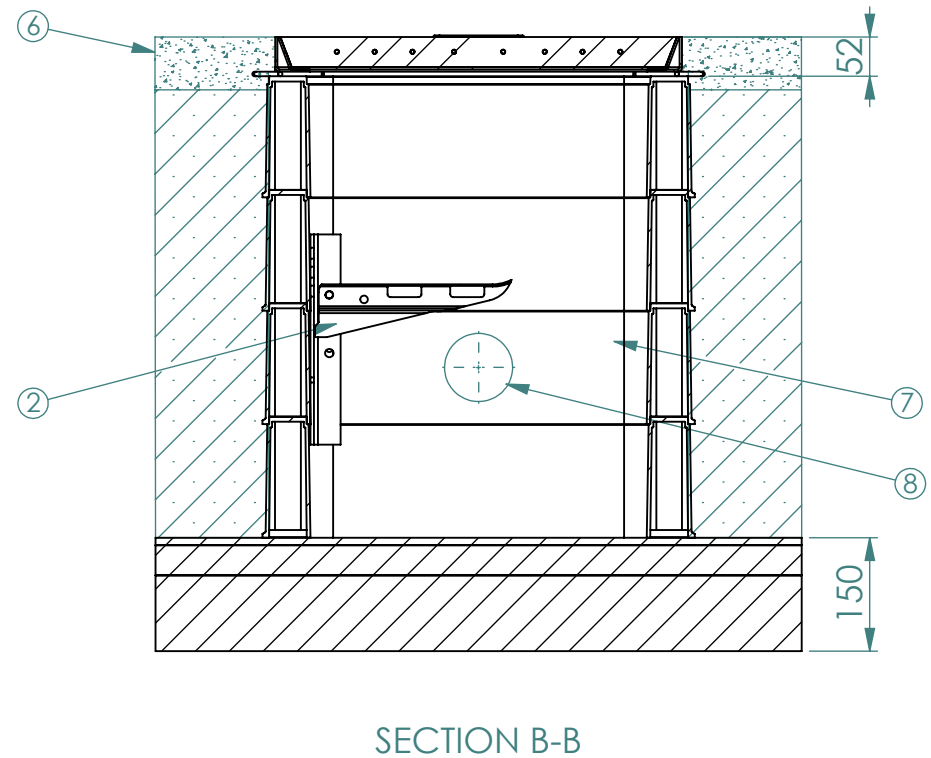


ITEM	DESCRIPTION
1	Cubis AX-S B125 Concrete Infill Cover
2	Cable Management Kit
3	Type 1 MOT
4	40mm Dry Lean Mix Concrete
5	10mm Sand & Cement (Drymix)
6	50-90mm Deep Asphalt
7	915x445x600m Fortress Chamber
8	90mm Ducting

- Notes.
1. END DUCTS TO BE IN LINE
 2. WHERE POSSIBLE DUCTS TO BE POSITIONED NO LESS THAN 75MM FROM SIDE WALLS & 100MM FROM BASE
 3. CHAMBER SIDE WALLS TO BE BACK FILLED MINIMUM 150MM COMPACTED TYPE 1 MOT

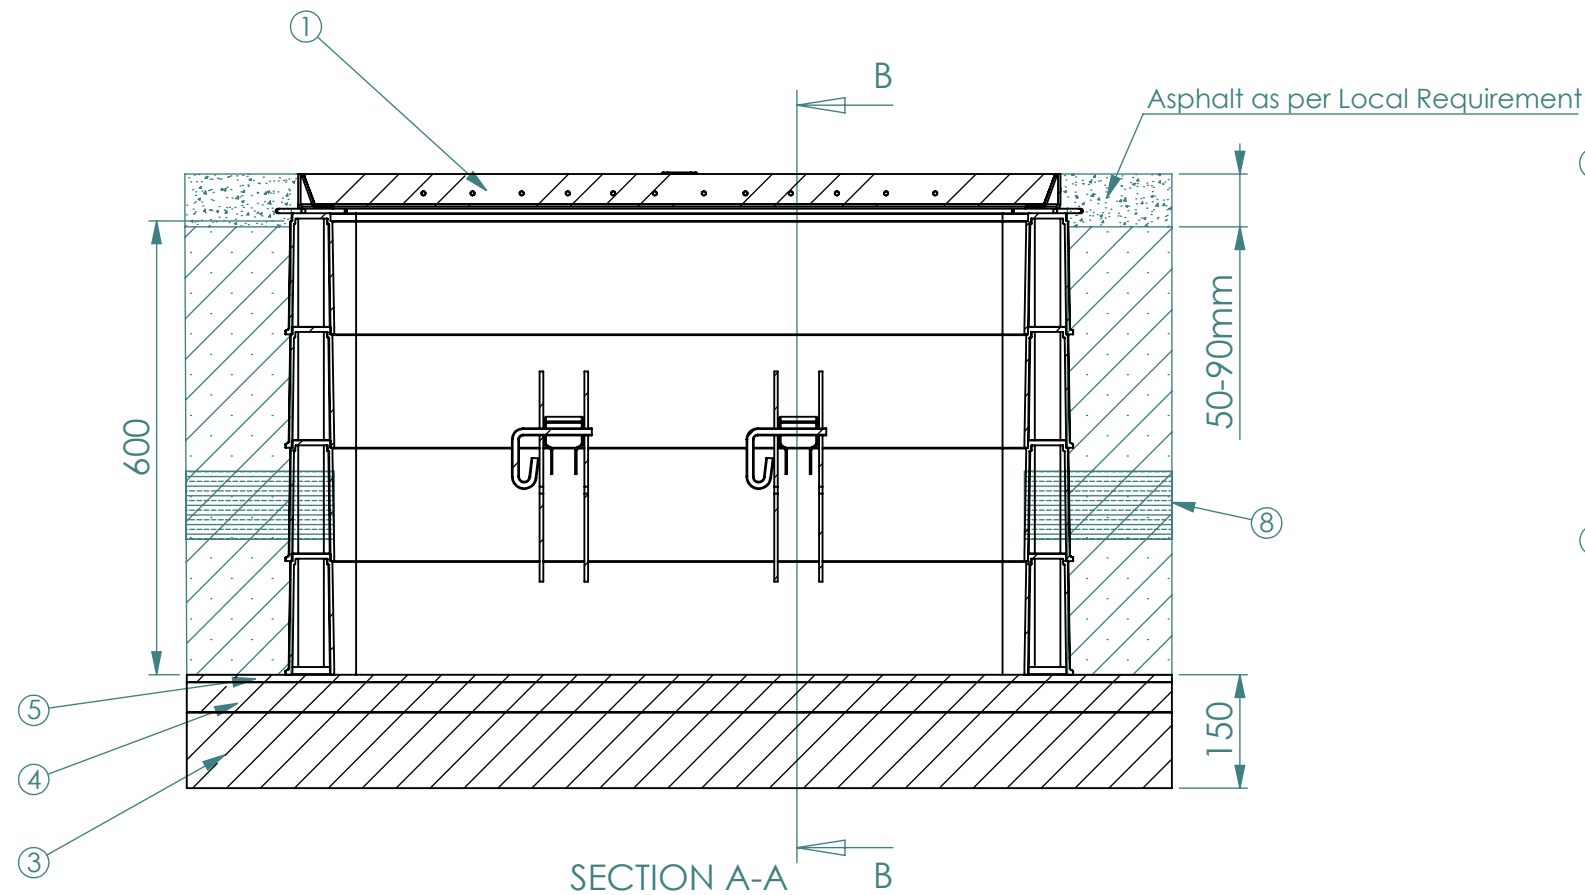

Copyright of Cubis. No part of this document may be communicated, copied or used without prior permission of Cubis.

www.Cubis-Systems.com

Date	17/08/18
Drawn	CH
Appr.	CH

Third Angle Projection
Weight

. kg

Material	
Finish	
Tolerance unless Otherwise Stated	+1,-1
DIMS	mm

TITLE	Gicaclear Footway 4 Fortress Chamber & AX-S Cover - Asphalt Surface
SIZE	A3
DWG NO	15777 - 02
SHEET 1 OF 1	
REV	

	--/--/--				
	--/--/--				
	--/--/--				
	--/--/--				
Rev	Date	Revision History: Description			Drwn Appr