


MATERIAL:- SURLYN (DU PONT)  
COLOUR ORANGE BS 381C No 557 OR  
EQUIVALENT.

FINISH:- CLEAN

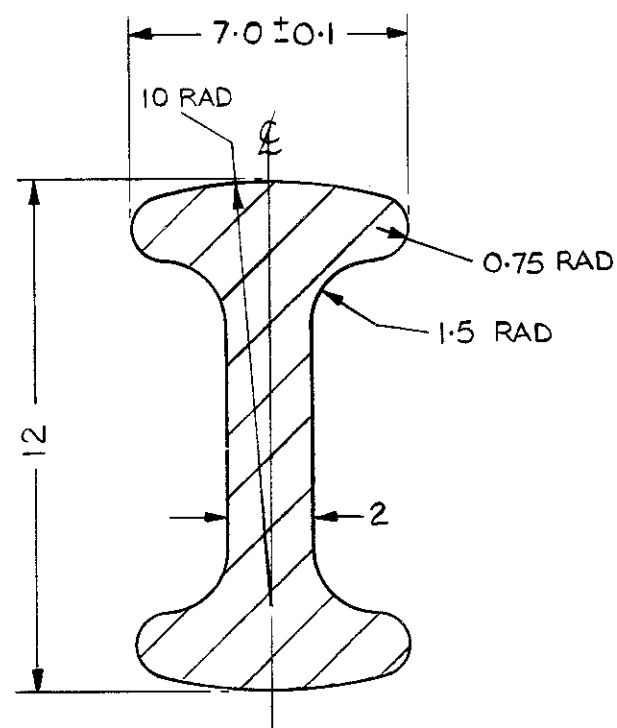

ENLARGED SECTION X-X  
8 x FULL SIZE

#### NOTES:-

1. MARKING AS INDICATED TO BE IMPRESSED IN POSITIONS AS SHOWN ON ONE SIDE ONLY IN 6mm HIGH CHARACTERS.
2. SLITS TO ENABLE OPPOSITE END OF MARKER TO BE PASSED THROUGH.
3. EXTRUSION TO BE COOLED WHILST STRAIGHT & BUNDLED INTO PACKS OF 20 WITH RUBBER BANDS.
4. WHEN EMPLOYING, MARKER WRAPPED ONCE AROUND CABLE COIL TO BE MARKED, WITH FREE END PASSING THROUGH THE SLIT AT THE OPPOSITE END. CABLE COIL THEN BURIED LEAVING FREE END OF MARKER PROJECTING ABOVE GROUND LEVEL. IF CABLE COIL IS TO BE BURIED AT A GREATER DEPTH THAN A SINGLE MARKER A SECOND MARKER CAN BE THREADED THROUGH THE FREE END OF FIRST MARKER TO INCREASE ITS LENGTH.

© British Telecommunications plc 1984

DO NOT SCALE

DIMENSIONS IN mm EXCEPT  
WHERE OTHERWISE STATED  
ORIGINAL SCALE 1/1

A2 A3	DRN SJA CKD <i>OP 2.2.5</i>		REFS:- D1000 DELETED & TL476 ADDED. GENERAL TOLS. ADDED & 'No' REMOVED FROM TITLE.	B	TOLERANCES UNLESS OTHERWISE STATED TO BE: < 3 ± 0.1 ≤ 100 ± 1.0 > 100 ± 10	MATERIAL AS SHOWN	FINISH AS SHOWN	REFERENCES SPEC BS381C
	CERTIFICATION <i>OP 2.2.5</i>	REF TO SPEC TL476 REMOVED.	J.R.P. <i>2/3/94</i>	C	MARKING UPDATED TO 'BT'.	MARKER CABLE 2		ALL THREADED FASTENERS AND TAPPED HOLES, UNLESS OTHERWISE STATED, TO BE ISO METRIC COARSE PITCH SERIES (MEDIUM FIT) TO SPEC BS 3643
R700	DATE 28-2-77	AMENDMENT	ISSUE	AMENDMENT	ISSUE	BT WHOLESALE, EBS U/G NETWORKS	NRDA24	CNI3243