
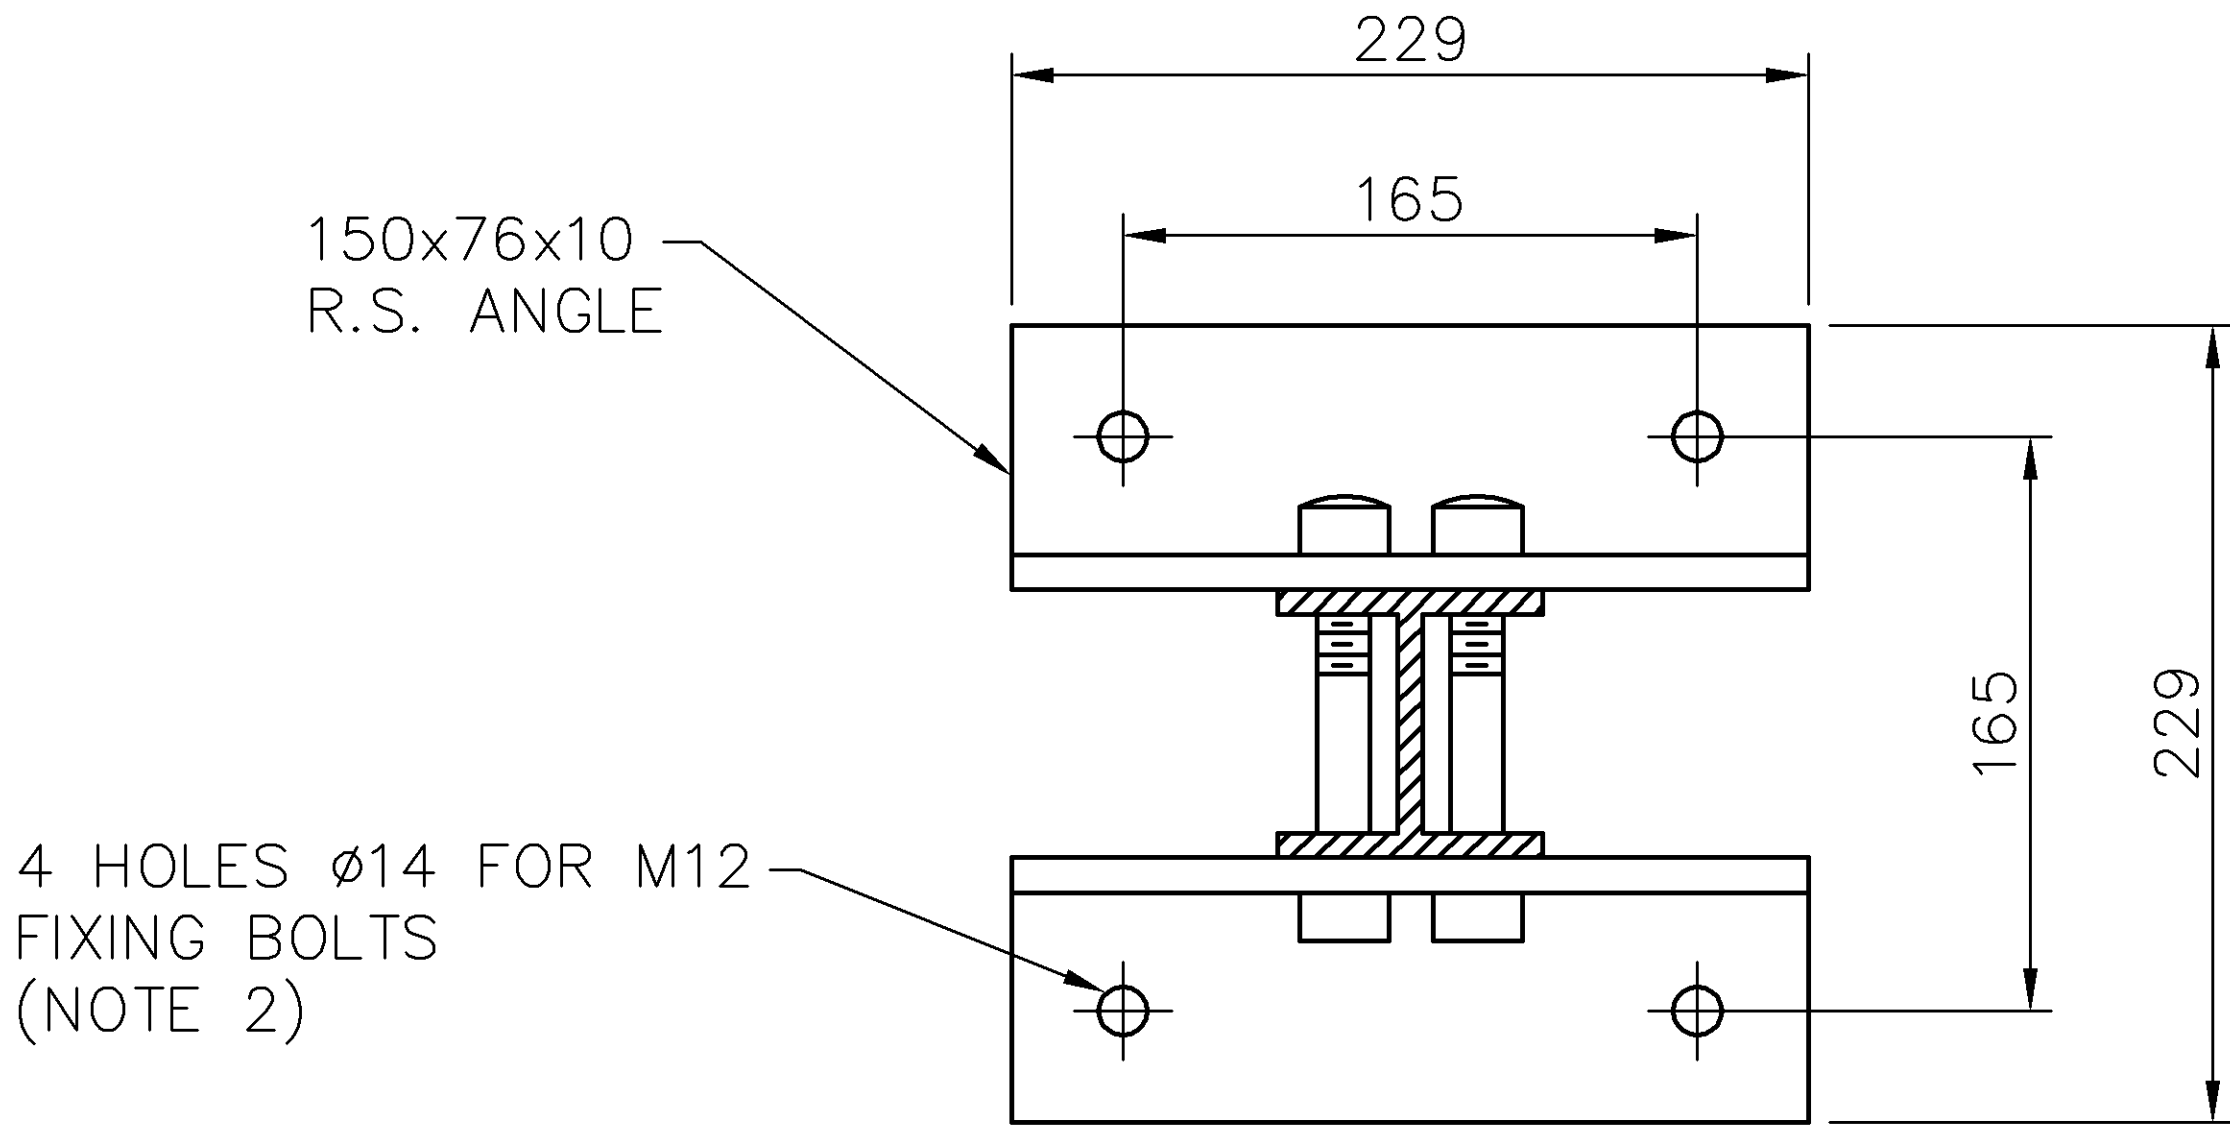


WALL TYPE
(SEE TABLE 1)

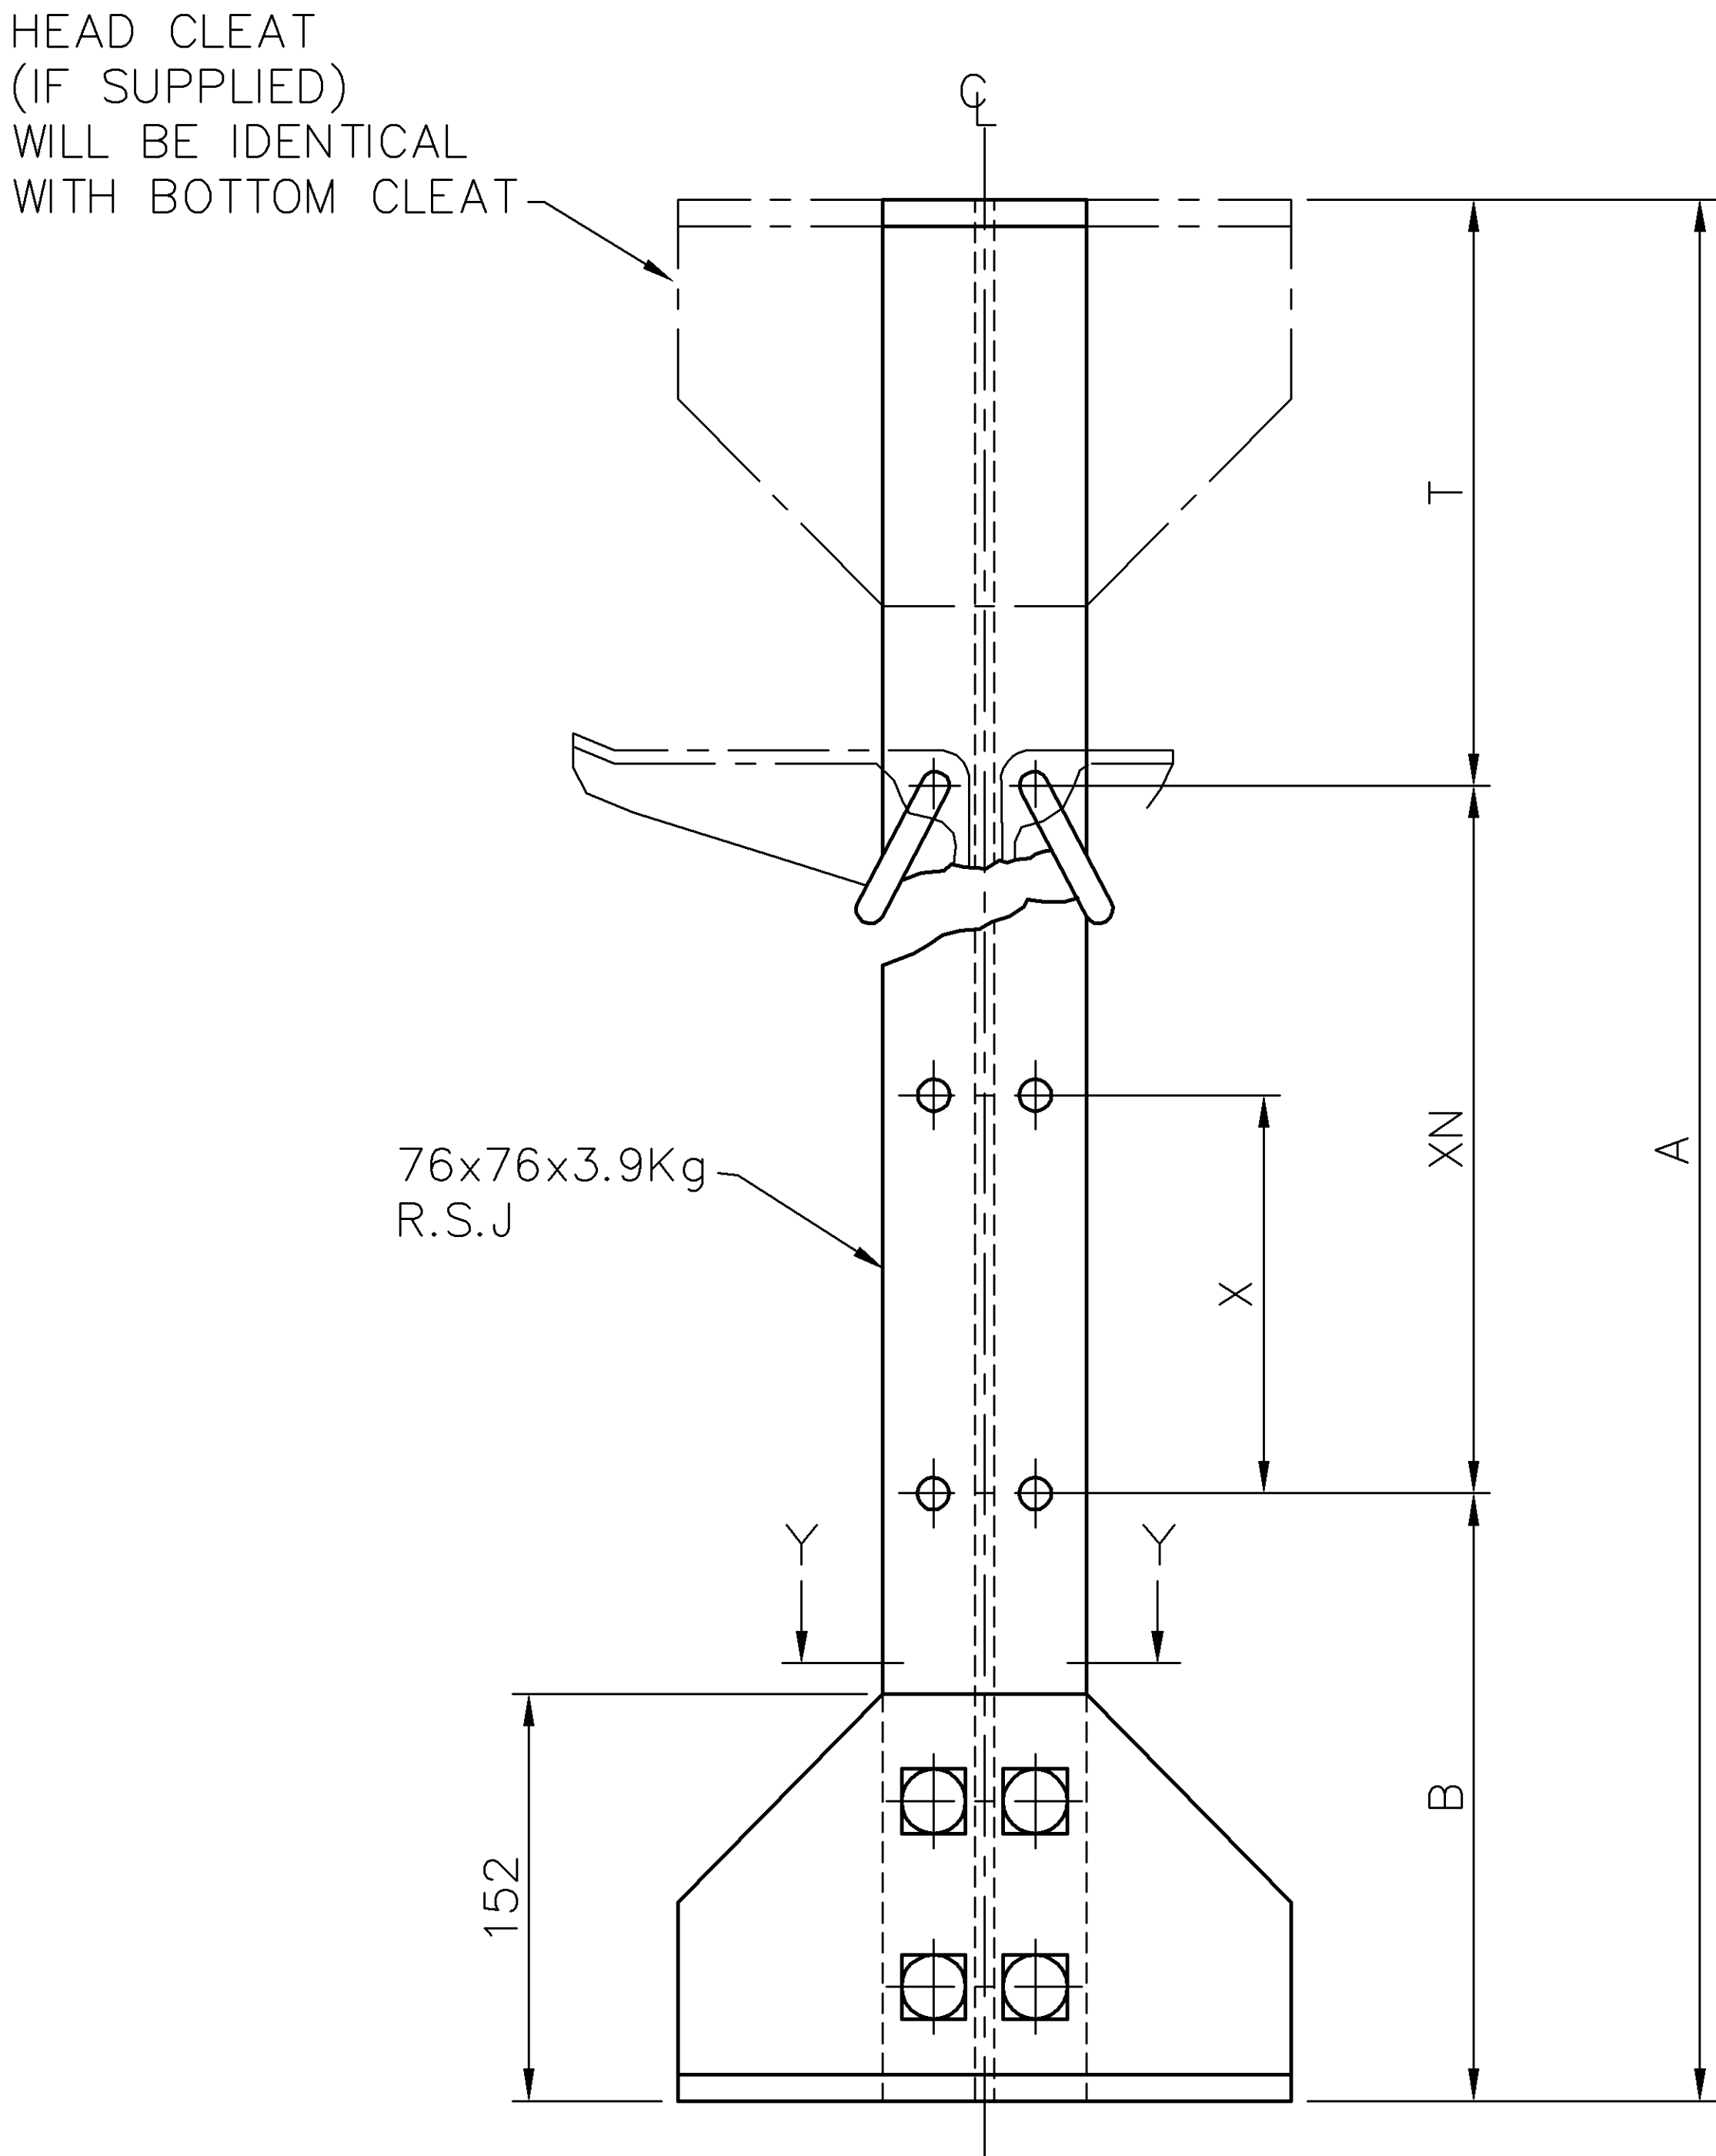

SECTION Y-Y

STANDARD TYPE
(SEE TABLE 2)

TABLE 1

FIXING DIMENSIONS (WALL TYPE ONLY)			
BEARER No.	O/A LENGTH DIM 'A'	BRACKET FIXING HOLES N	REMARKS
1	178	1 *	* TOP HOLES ONLY
2	279	2	PROVIDED 25, 50 & 75 CENTRES FROM TOP EDGE
3	508	5	DIMENSIONS GIVEN REFER TO STANDARD SIZES OF BEARER FOR NON-STANDARD SIZES ALL THE LETTERED DIMENSIONS WILL BE FURNISHED TO THE ERECTOR
5	813	9	
8	1270	15	
10	1574	19	
12	1879	23	

TABLE 2

FIXING DIMENSIONS (STANDARD TYPE)
THE FOOT CLEAT & HEAD CLEAT DIMENSIONS ARE STANDARD. ALL LETTERED DIMENSIONS WILL BE FURNISHED TO THE ERECTOR

- NOTES: –
- UPPER FIXING BOLT TO BE CENTRED ON MIDDLE HOLE
LOWER FIXING BOLT TO BE CENTRED AT THE MID-POINT OF DIM XB.
 - FIXING BOLTS TO BE: –
FOR NEW CONCRETE & BRICKWORK: –BOLTS, FOUNDATION, INDENTED No2.
FOR EXISTING JOINTING CHAMBERS: –BOLTS, EXPANSION, No 1A.