

NOTES

BE AWARE OF AND CONSIDER THE FOLLOWING RISKS DURING THE INSTALLATION WORKS:

Residual Risks

- Slips, trips & falls
- Social Distancing
- Working at / falls from height
- Materials
- Site security
- Exposure to construction dust
- Site access for delivery / removal of materials / equipment
- Pedestrians
- Vehicular traffic
- Stability of adjacent structures
- Fragile cables
- Supervision / training of operatives
- Site visitors / general public
- Services – gas / water / electric
- Manual handling
- Lifting & lowering materials
- Equipment / Plant
- Poor ground conditions
- Collapse of excavations
- Temporary works – shoring / supports
- Ground water
- Contaminated ground
- Storage of materials on site
- Exposure to UV radiation (Sunlight)
- Poor weather conditions – wind / rain / snow
- COSHH

NOTE:

Suitable PPE to be used were appropriate / required.

If unsure consult H&S advisor as required

TOLERANCES:–	CN15456
BEDDING MATERIAL	+5mm
CEMENT MORTAR	–20mm
DUCT ENTRY POSITION	±25mm
DUCT FLUSH WITH WALL	–10mm
F & C ROCKING	NIL
F & C SURROUND IN UNMADE	±5mm
F & C UNSUPPORTED OVER BOX	+10mm
F & C LEVEL WITH HIGHWAY	NIL


ANY MODIFICATION TO THE DRAWING OR THE USE OF ALTERNATIVE ITEMS TO THOSE SPECIFIED **MUST** BE AGREED WITH THE DESIGNER.

DRAWING TO BE READ IN CONJUNCTION WITH LN767–FTTP CURTILAGE JOINTING CHAMBER DOCUMENT.


© Openreach 2020

DO NOT SCALE ORIGINAL SCALE 1:10

DRN T&S Design CKD C. Morrell		MATERIAL		Pre issue review		P2		TOBY BOX INSTALLATION TYPE 4 C/W INSTALLATION		REFERENCES SPEC LN 550	
A2 A3		FINISH		BT		T&S Design 24-09-20		CN 15790		SH 02 OF 04	
CERTIFICATION DESIGNER T&S Design		OPENREACH		AMENDMENT		ISSUE		Openreach			
DATE 04-06-20											

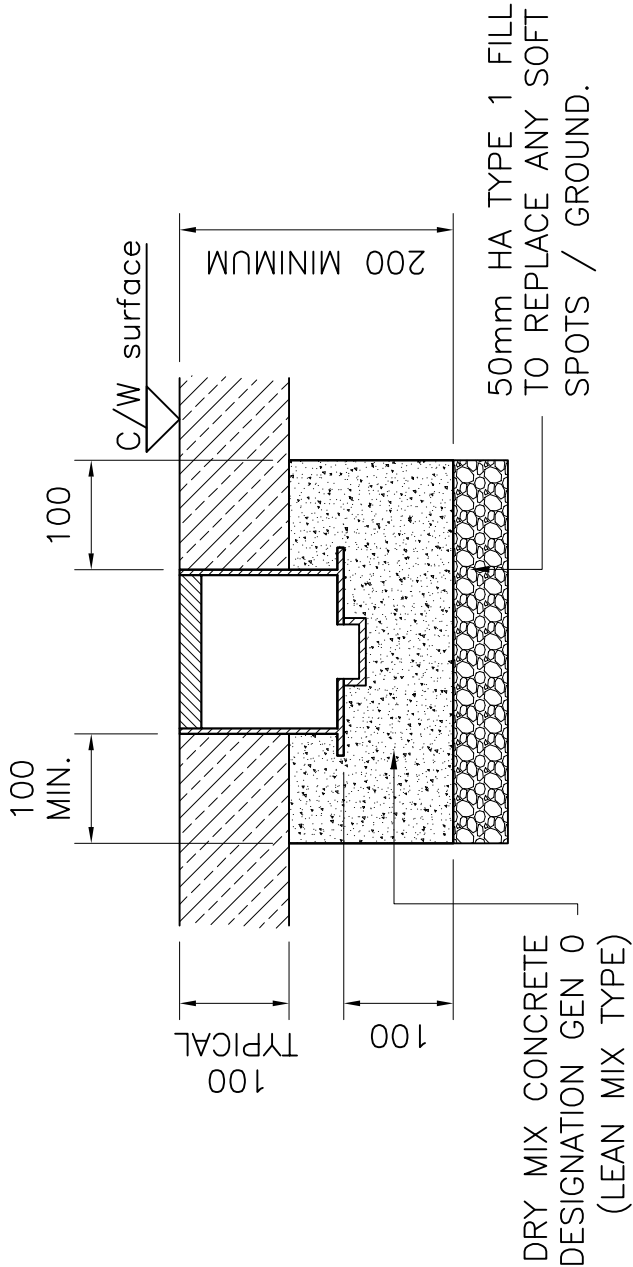

TYPE 4 C/W INSTALLATION (FRONT VIEW)

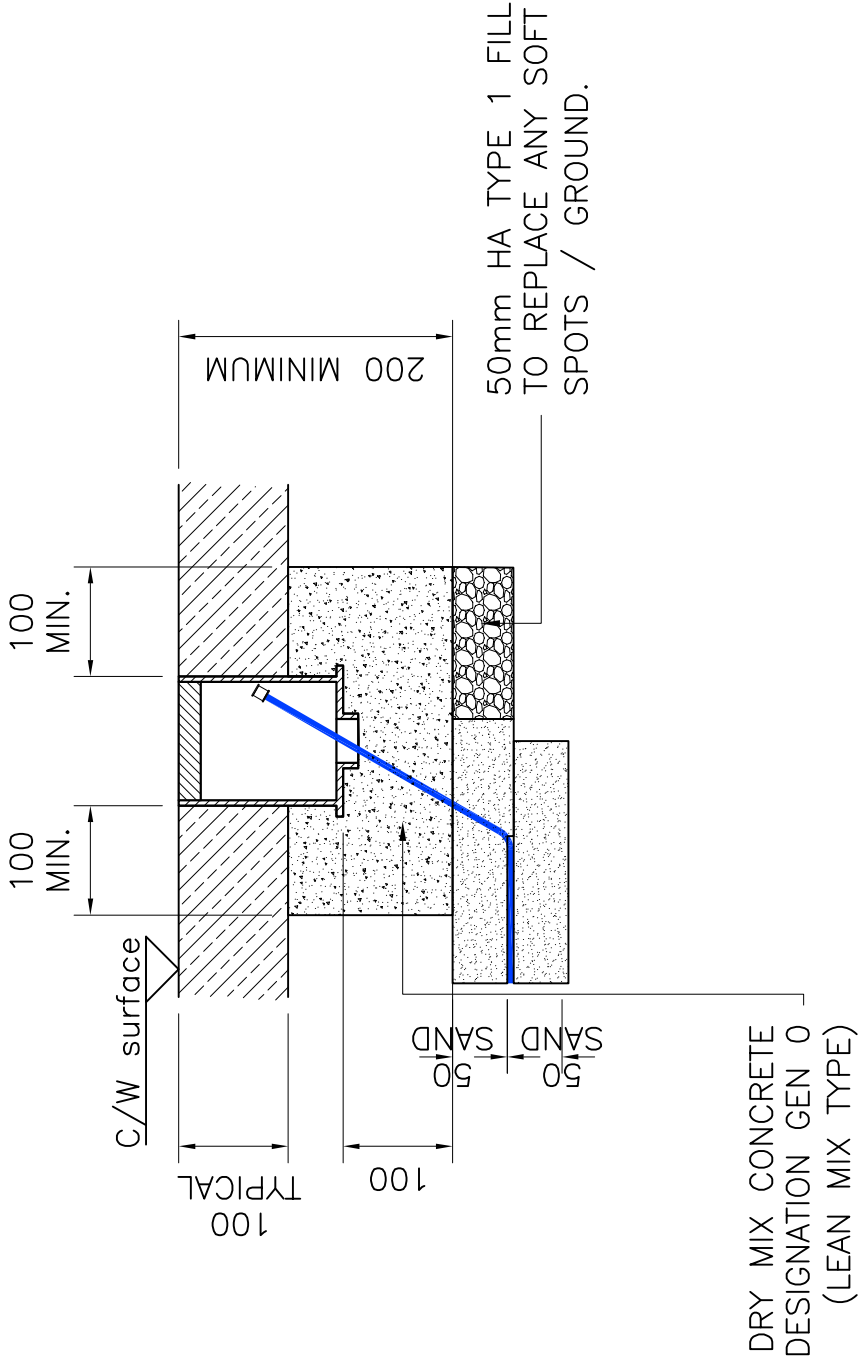

TYPE 4 C/W INSTALLATION (SIDE VIEW)