
Request for quotation: aluminium steel-look pivot door profile system

Wanted: a supplier or extruder delivering this profile system (or an equivalent one) in full bars. The drawings are a proposal: your own profile with the same function and dimensions is welcome.

Example: grid door, opening 1000 x 2400 (where each profile goes)

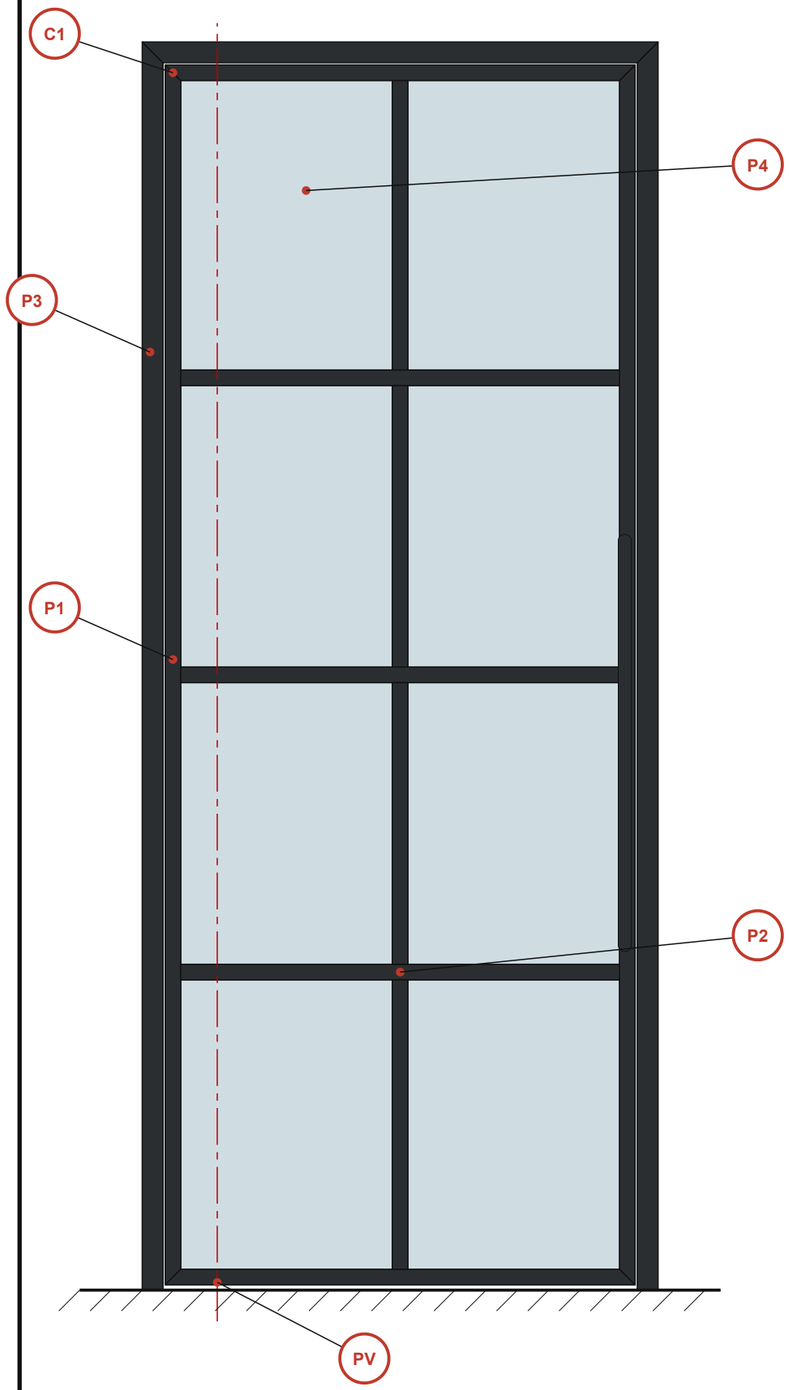

Code	Item	Size (mm)	Requirements	Per door*
P1	Door leaf profile (frame)	30 x 45, wall 1.8	glass channel 12.4 wide x 12 deep, centred in depth; cavity 14.4 x 41.4 for corner cleat C1	6,5
P2	Glazing bar (H profile)	30 x 45, wall 1.8	channel 12.4 x 12 on both sides; solid 6 mm core with 2 screw ports Ø3.8	4,7
P3	Door frame (jamb) profile	40 x 50, wall 2	tube (may be a standard tube); mitred with corner cleat	5,8
P4	U glazing gasket	11 x 12.4	EPDM Shore A 70, black, for 8-8.8 mm glass (44.2 laminated or 8 tempered); on rolls	15,3
C1	Corner cleat	fits 14.4 x 41.4	aluminium, 2 legs of 60 mm, 2 M6 set screws per leg (or crimp type); also for P3	6 st
C2	Glazing bar screw	stainless 4.8 x 50	countersunk, through P1 into the screw port of P2 (2 per bar end)	28 st
PV	Pivot hinge	door up to 150 kg	bottom plate and top pin, axis 100 mm from the edge; fits a 45 mm deep leaf	1 st

* metres per door (grid door 1000 x 2400), cutting loss not included


General requirements

- Alloy EN AW-6063 T6 (or T66). Tolerances to EN 755-9 and EN 12020-2; minimum wall 1.8 mm.
- Finish: powder coat RAL 9005 fine texture matt, Qualicoat class 1, 60-80 µm; RAL 7016 and 9016 also wanted. Or black anodised.
- Bar length 6000 mm (5800-6500 accepted), protective film on visible faces, bundled per profile.
- Glass: laminated 44.2 (8.76 mm) or tempered 8 mm. Door up to 1250 x 3000 mm and 150 kg; interior use.

Sections 2:1: P1, P2, P3, P4


P1 door leaf profile

0.79 kg/m · EN AW-6063 T6

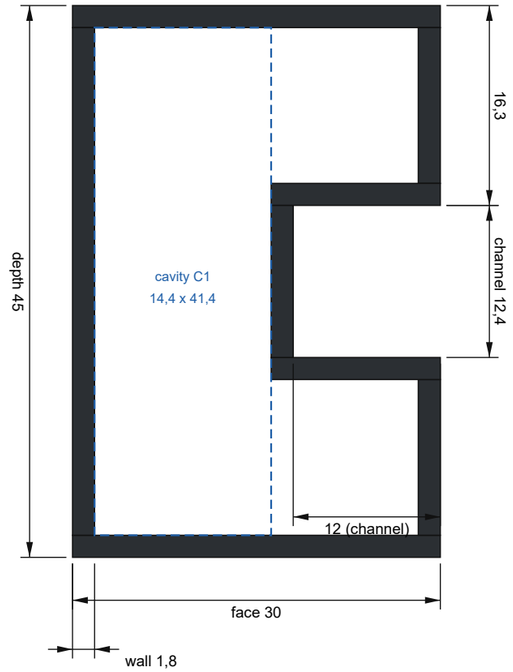


P2 glazing bar (H)

1.01 kg/m · EN AW-6063 T6

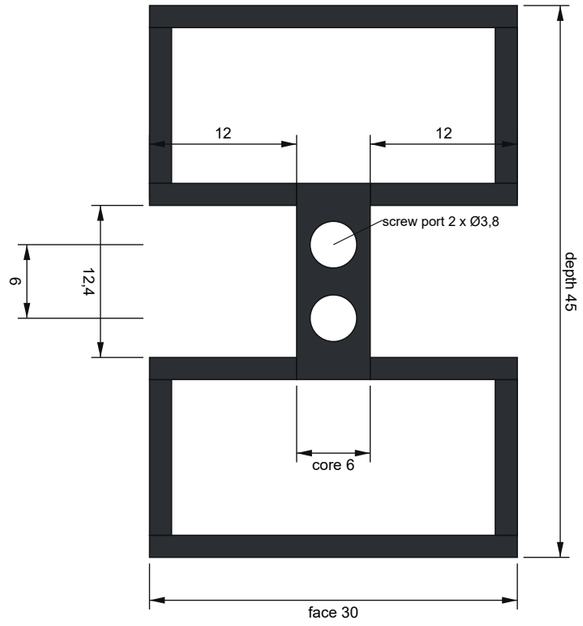


P3 door frame

0.93 kg/m

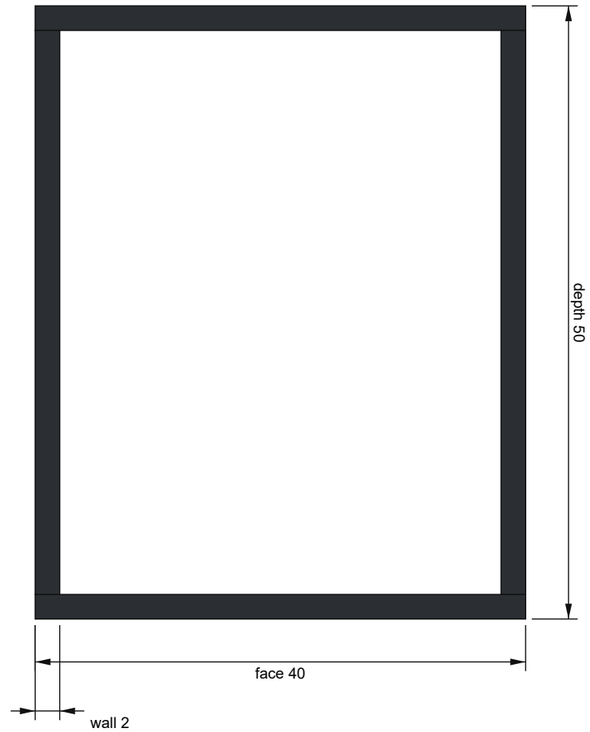


P4 U glazing gasket (EPDM) (4:1)

EPDM Shore A 70

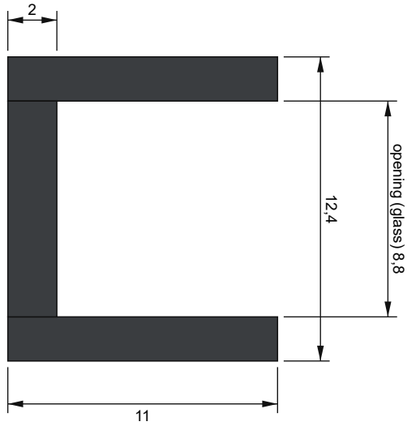


Glass in the channel (1,5:1)

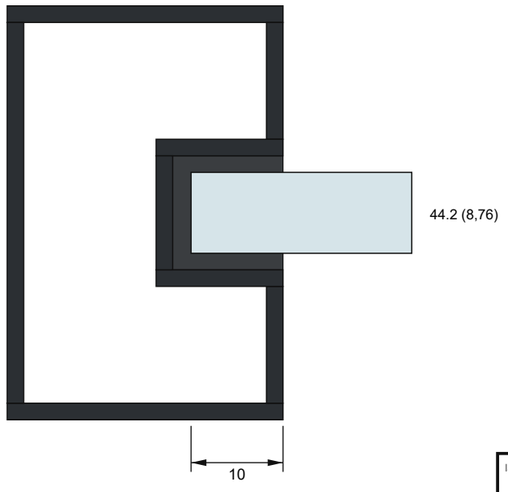

Dimensions in mm. Sections at scale 2:1 on A3. First angle projection (ISO 5456-2).


Joints

Leaf corner: 45° mitre

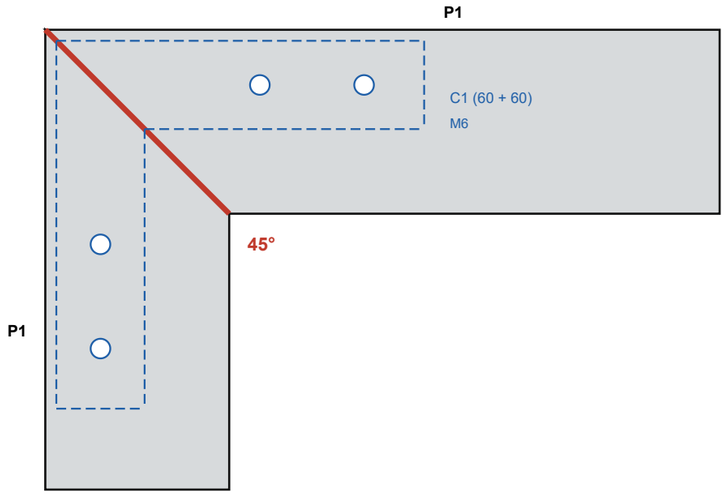


Cut P1 at 45°.
C1 in both legs, 2K adhesive on the mitre,
tighten M6 set screws. Glass is fitted
before the last frame member closes.

Glazing bar to frame (T joint)

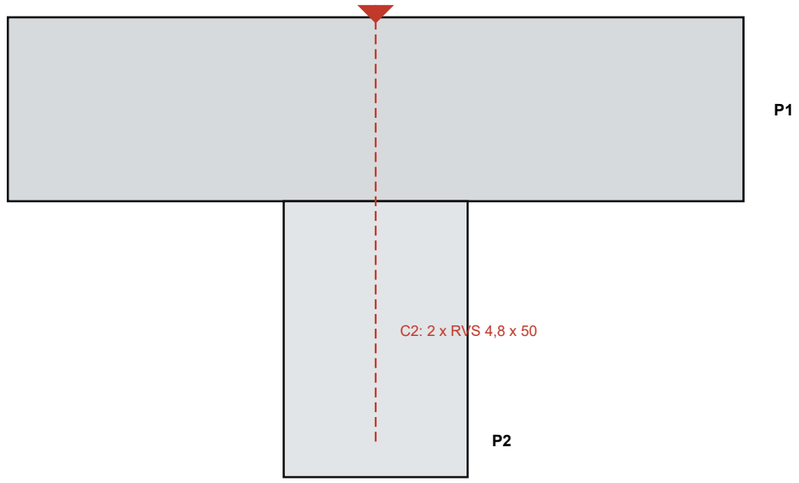


Cut P2 square to the clear opening.
Drill P1 Ø5.5 (countersunk), 2 screws C2
into the screw ports of P2; seal the joint.

Glass in the channel

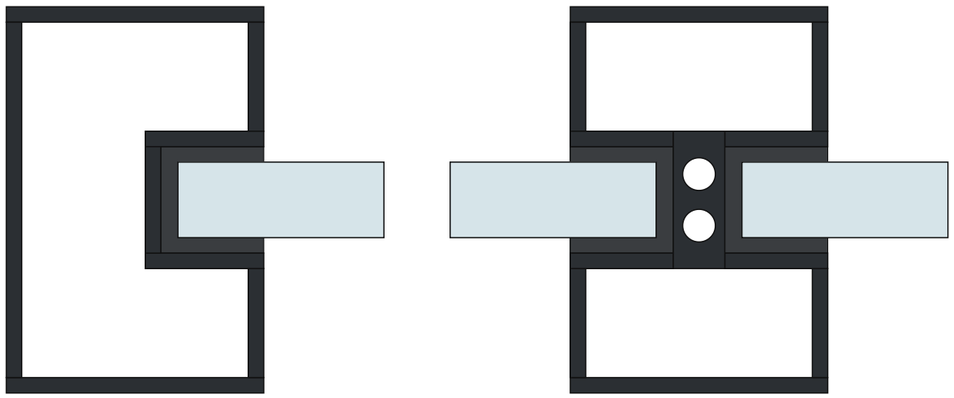

U gasket P4 around each pane edge.
Glass enters 10 mm, 2 mm clearance.
Glass size = clear opening + 8 mm all round.

Pivot

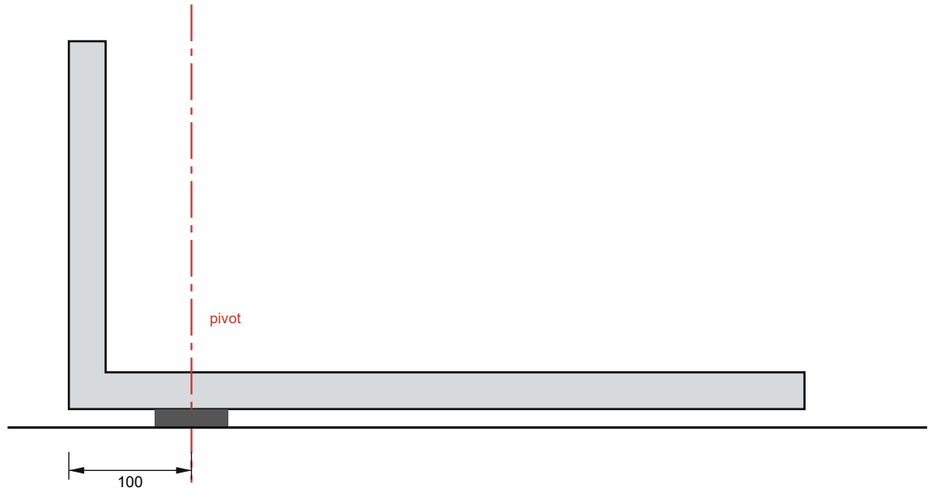


Axis 100 mm from the hinge side.
Bottom plate in the bottom rail P1 (cavity),
top pin in the top rail; ceiling plate.

Request for quotation

Please quote

- Price per metre or per kg, per profile and per colour (excl. VAT); die cost if the profile is new.
- Minimum order per profile and per colour; lead time; delivery to Belgium (DAP) and packing.
- Dimensioned drawing (PDF or DWG) of your profile with weight per metre; 300 mm samples of each profile.
- Matching corner cleats (C1), gaskets (P4) and pivot hinges (price each), or where to buy them.
- Payment terms; certificates (Qualicoat, EN 755).

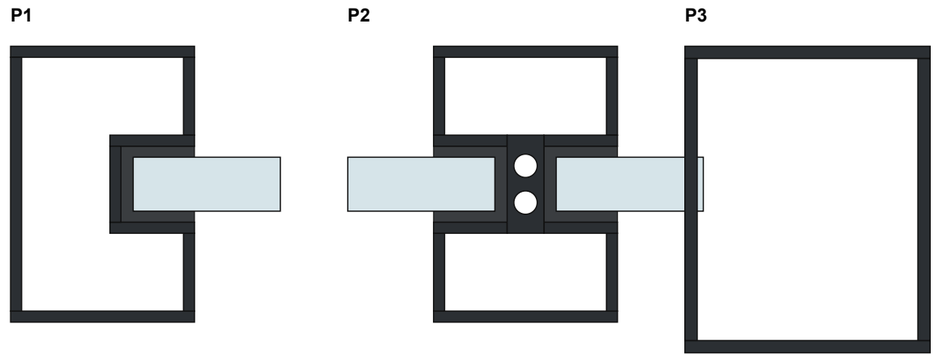

Door (opening)	P1 m	P2 m	P3 m	P4 m	C1 pcs	C2 pcs	Glass m²
Strak 1000 x 2400	6,5	0	5,8	6,2	6	0	1,92
Drie vakken 1000 x 2400	6,5	1,7	5,8	9,5	6	8	1,87
Vier vakken 1000 x 2400	6,5	2,5	5,8	11,1	6	12	1,84
Raster acht 1000 x 2400	6,5	4,7	5,8	15,3	6	28	1,78
Raster twaalf 1000 x 2400	6,5	6,9	5,8	19,4	6	44	1,71
Japandi 1000 x 2600	6,9	7,4	6,2	21,4	6	12	1,87
Strak 1200 x 2800	7,7	0	6,8	7,4	6	0	2,79

Expected volume: _____ doors per year (± _____ m P1, _____ m P2, _____ m P3).

Contact

Name: _____ Company: Ian · Iaswerken (Belgium)

Address: _____

E-mail: _____ Phone: _____

Quotation requested by: _____ (date)