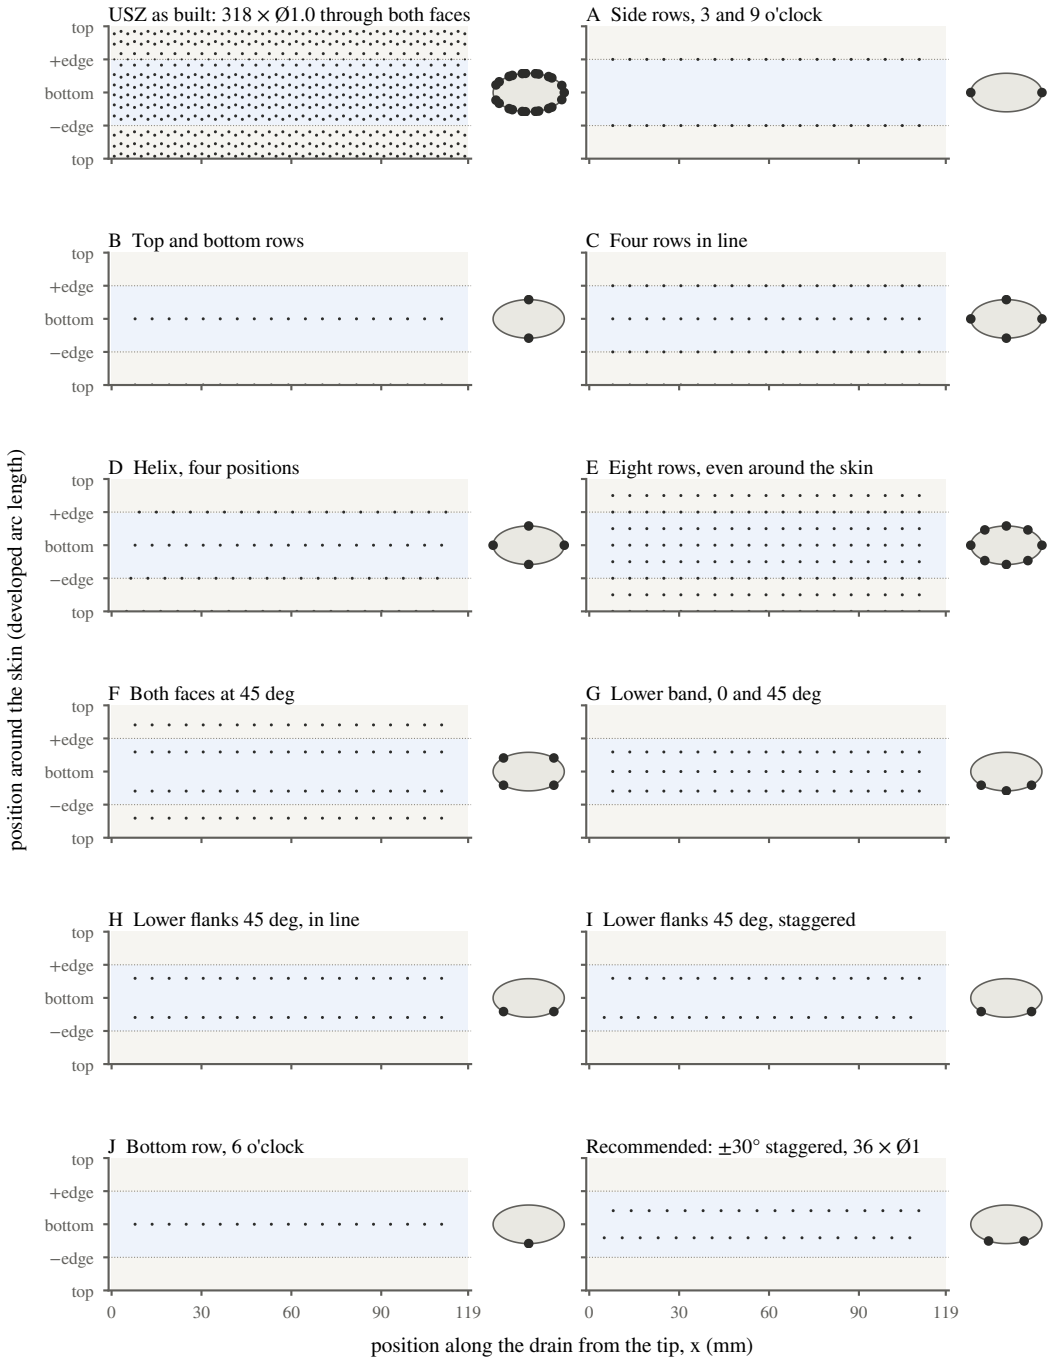

USZ as built: 318 × Ø1.0 through both faces
A Side rows, 3 and 9 o'clock
B Top and bottom rows
C Four rows in line
D Helix, four positions
E Eight rows, even around the skin
F Both faces at 45 deg
G Lower band, 0 and 45 deg
H Lower flanks 45 deg, in line
I Lower flanks 45 deg, staggered
J Bottom row, 6 o'clock
Recommended: ±30° staggered, 36 × Ø1
top
+edge
bottom
−edge
top
position around the skin (developed arc length)
0
30
60
90
119
position along the drain from the tip, x (mm)