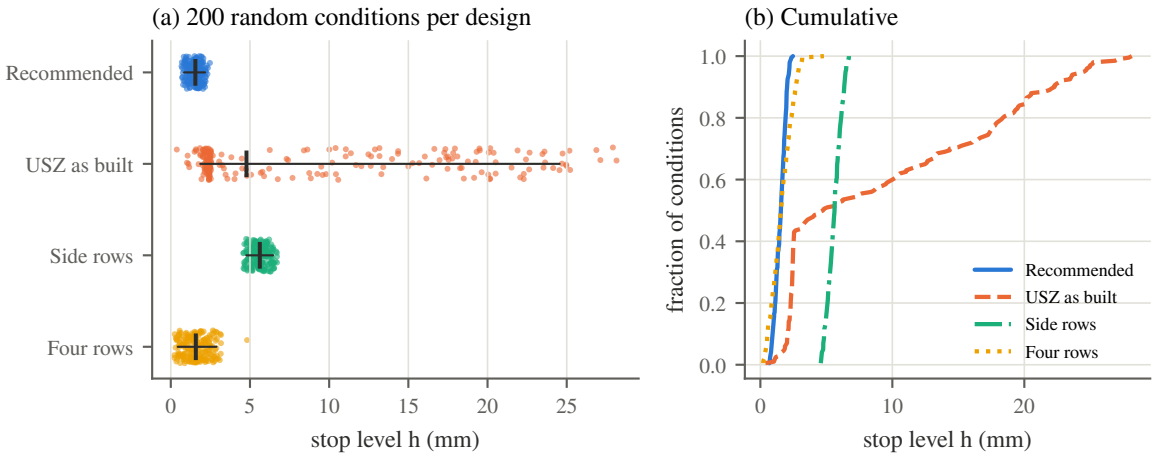
(a) 200 random conditions per design
Recommended
USZ as built
Side rows
Four rows
0
5
10
15
20
25
stop level h (mm)
(b) Cumulative
fraction of conditions
1.0
0.8
0.6
0.4
0.2
0.0
0
10
20
stop level h (mm)
Recommended
USZ as built
Side rows
Four rows