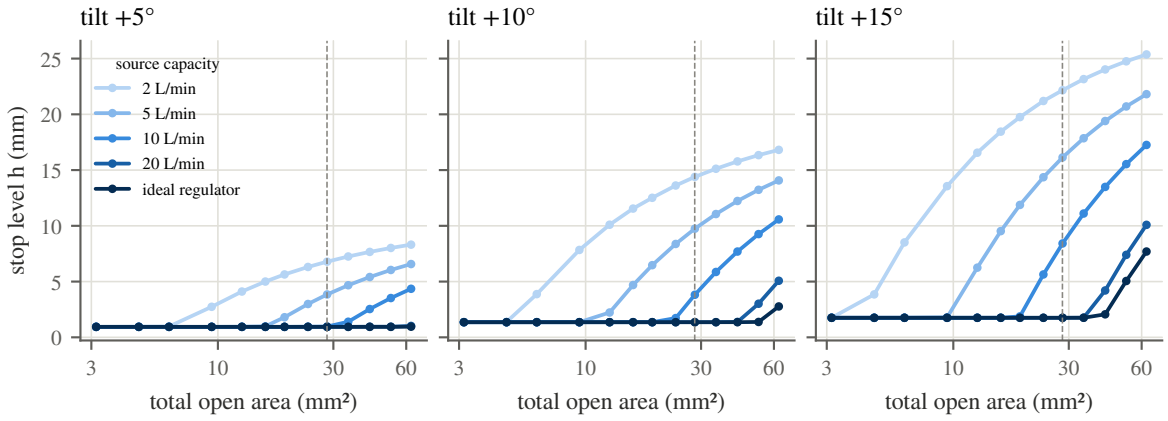
tilt +5°
tilt +10°
tilt +15°
source capacity
2 L/min
5 L/min
10 L/min
20 L/min
ideal regulator
stop level h (mm)
0
5
10
15
20
25
3
10
30
60
total open area (mm²)